

# Safety Solutions





## Contents

Complete Safety Solutions from Banner .....	4
Network Technology Down to the Device Level .....	6
Banner In-Series Diagnostics (ISD) .....	8

### Hand, Finger and Body Detection

Choosing a Safety Light Curtain .....	10
S4B Type 4 Heavy-Duty Light Curtains .....	14
EZ-SCREEN LS Type 4 Heavy-Duty Light Curtains .....	16
EZ-SCREEN 14/30 Type 4 Light Curtains .....	20
EZ-SCREEN LP Type 4 Compact Light Curtains .....	22
SLC4 Type 4 Ultra Compact Light Curtains .....	24
EZ-SCREEN LS2 Type 2 Light Curtains .....	26
SGS Type 4 Safety Light Grids .....	28

### Area Detection

Choosing a Safety Scanner .....	32
Safety Scanner System .....	36
Safety Scanner Software .....	39
Safety Scanner Fixed Applications .....	40
Safety Scanner Mobile Applications .....	41

### Safety Relays and Controllers

Choosing a Relay and Controller .....	42
Safety Relays and Safety Controllers .....	46
In-Series Diagnostics Functionality .....	49
System Software .....	50
Safety Relay Models .....	52
Safety Controller Models .....	53

### Safety Switches


Choosing a Safety Switch .....	54
Safety Switches .....	58
Non-Contact RFID Safety Switches .....	60
Enabling Devices .....	61
Safety Switch Models .....	62

### Operator Controls

Choosing an Emergency Stop Device .....	66
E-Stop Device Models .....	70



# Complete Safety Solutions from Banner



## Safety Light Curtains

- Intuitive and easy-to-use and set up
- End-to-end sensing
- Heavy-duty aluminum housing and recessed window to avoid damage in harsh environments
- Highly visible alignment and diagnostic indicators
- IP69 hygienic models available for washdown environments
- Cascade capable models available
- See page 10




## Safety Controllers

- Up to eight expansion I/O modules can be added as your safety application grows or changes
- Configuration software is so simple that you will be programming in minutes
- Simulator functionality allows users to test their configurations without being connected to a controller
- See page 42




## Safety Laser Scanners

- Two-dimensional laser scanner with easy-to-use software
- Programming of irregular shaped warning and detection zones
- 275° scanning angle with selectable resolutions and 5.5 m range
- See page 32

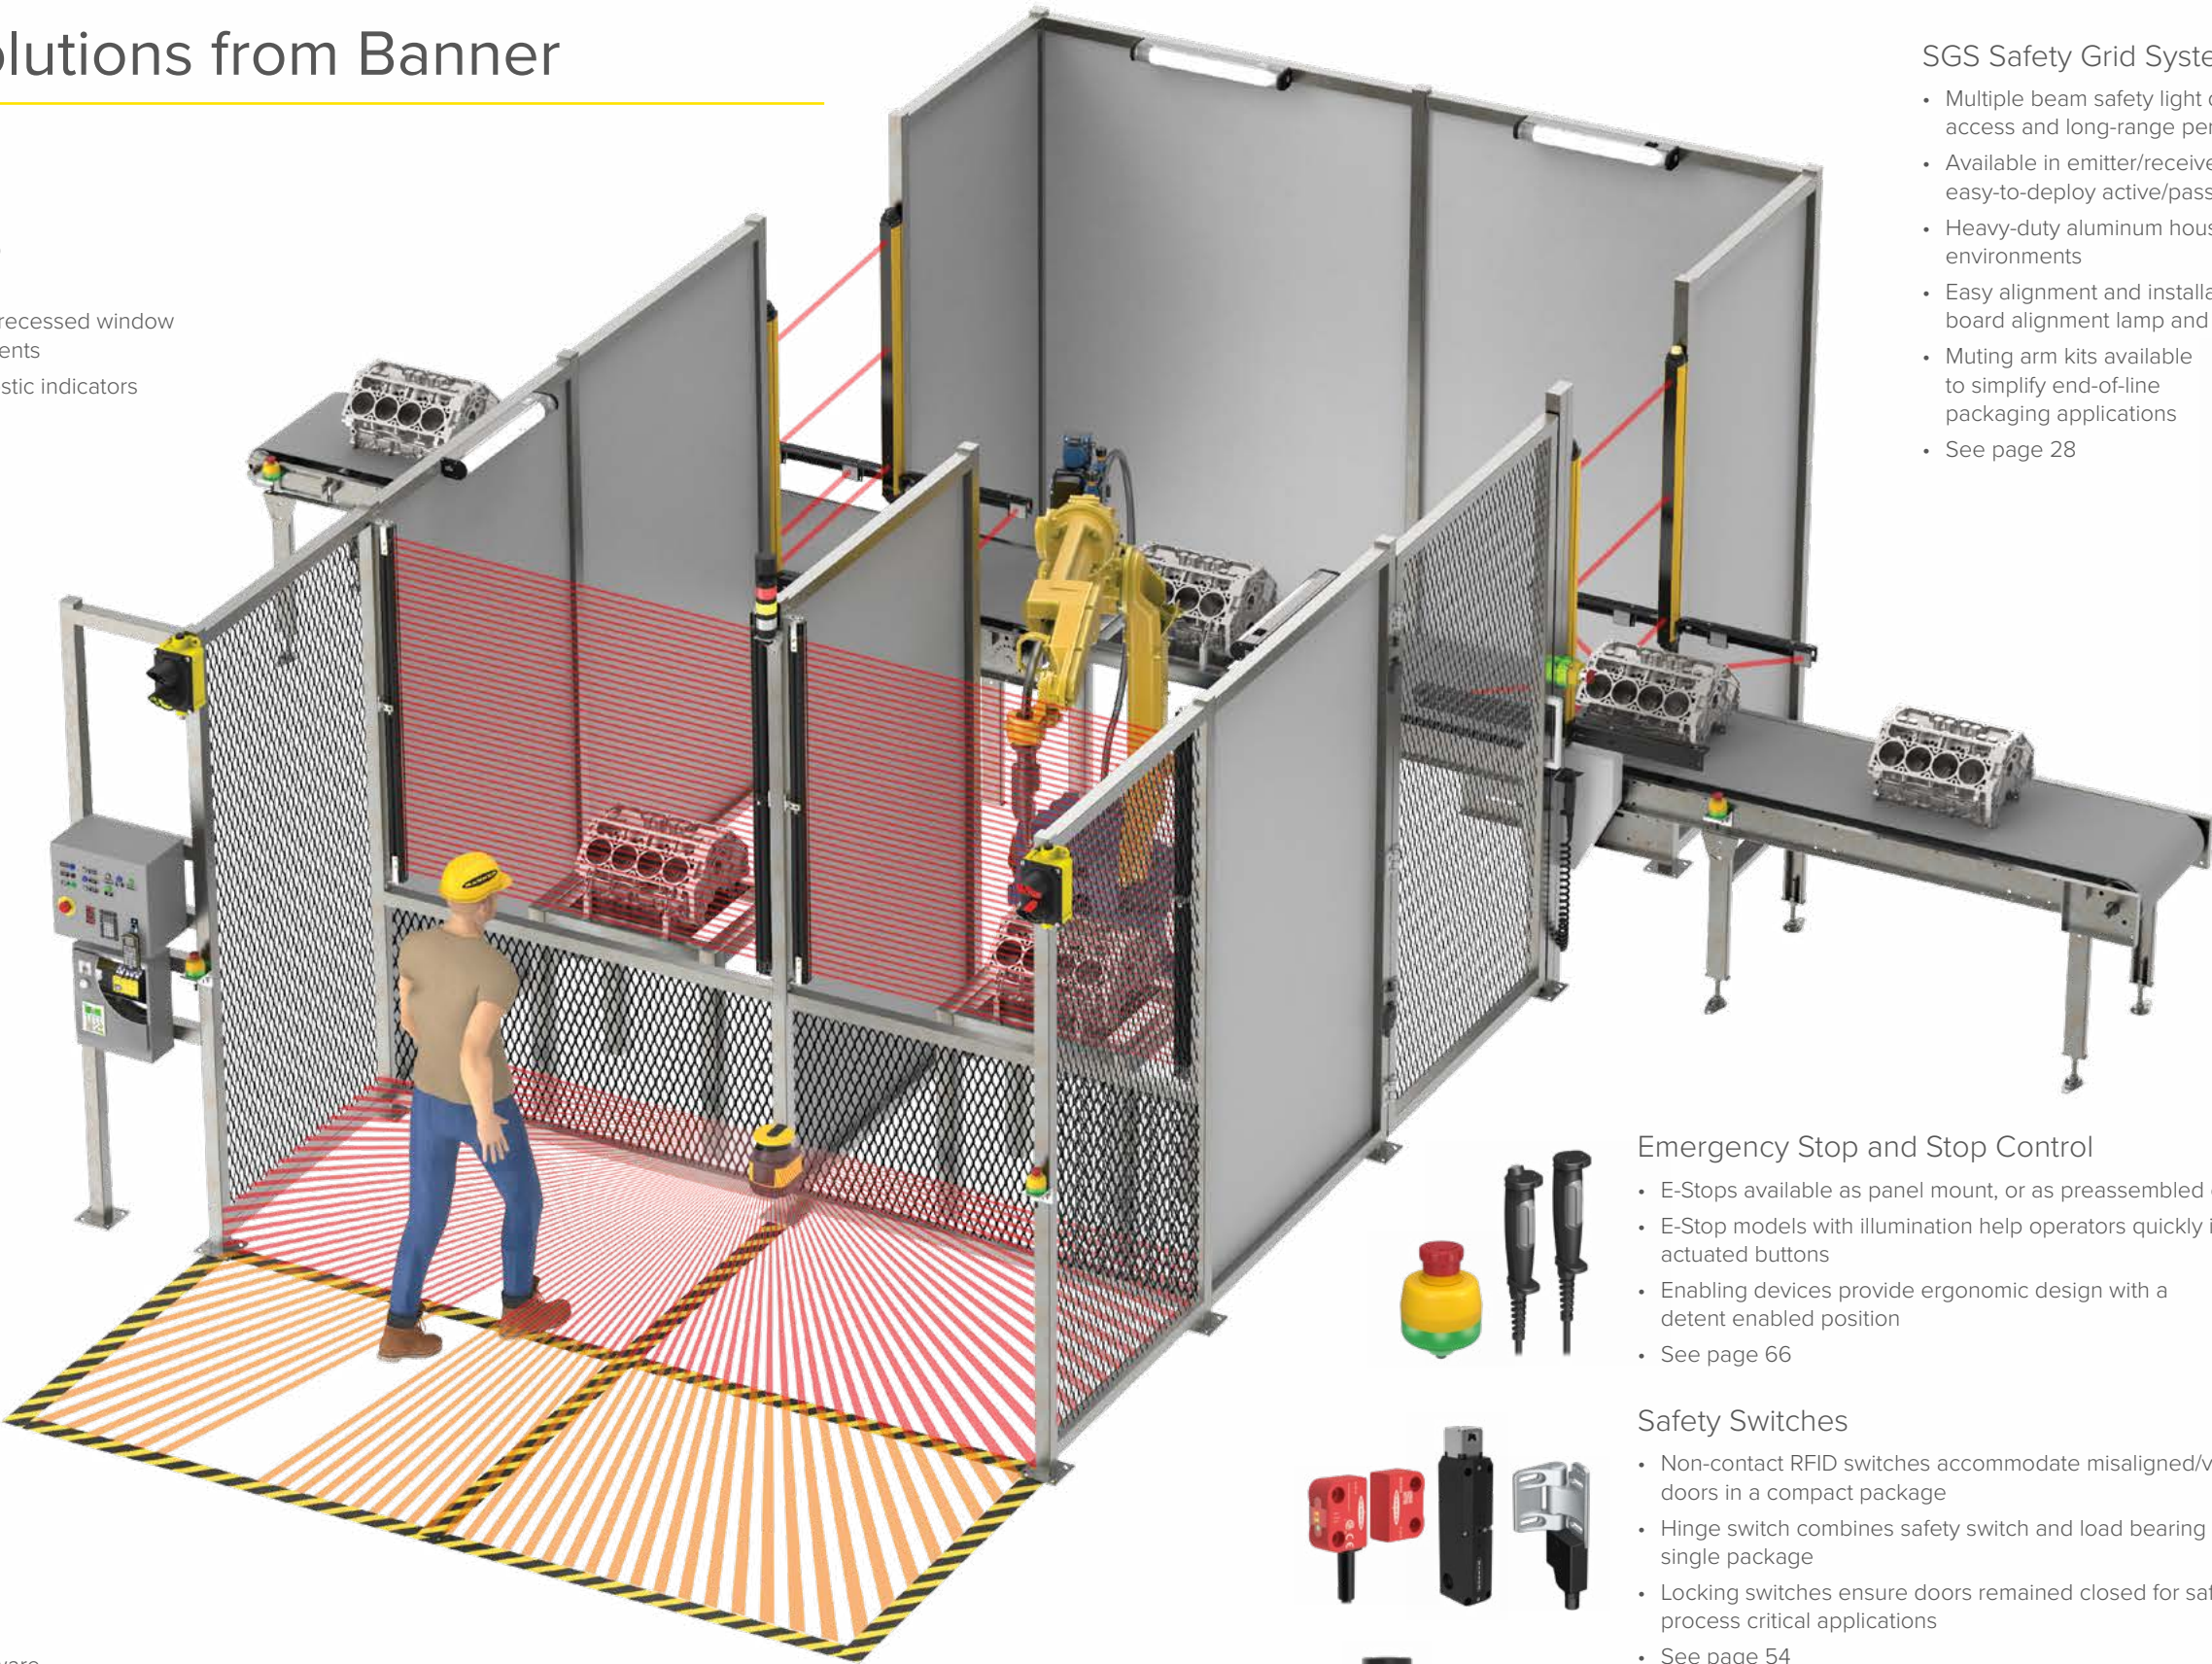

## SGS Safety Grid Systems

- Multiple beam safety light devices for access and long-range perimeter guarding
- Available in emitter/receiver models and in easy-to-deploy active/passive models
- Heavy-duty aluminum housing for tough environments
- Easy alignment and installation with on-board alignment lamp and indicators
- Muting arm kits available to simplify end-of-line packaging applications
- See page 28

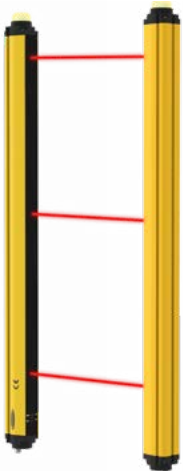

## Emergency Stop and Stop Control

- E-Stops available as panel mount, or as preassembled enclosures
- E-Stop models with illumination help operators quickly identify actuated buttons
- Enabling devices provide ergonomic design with a detent enabled position
- See page 66



## Safety Switches

- Non-contact RFID switches accommodate misaligned/vibrating doors in a compact package
- Hinge switch combines safety switch and load bearing hinge in a single package
- Locking switches ensure doors remained closed for safety and process critical applications
- See page 54





## Lighting and Indication

- Preassembled and preconfigured multi-segment LED tower light indicators
- Programmable multicolor LED indicators, panel mount models available
- Pro Editor software offers a wide variety of color and animation options





# Network Technology Down to the Device Level

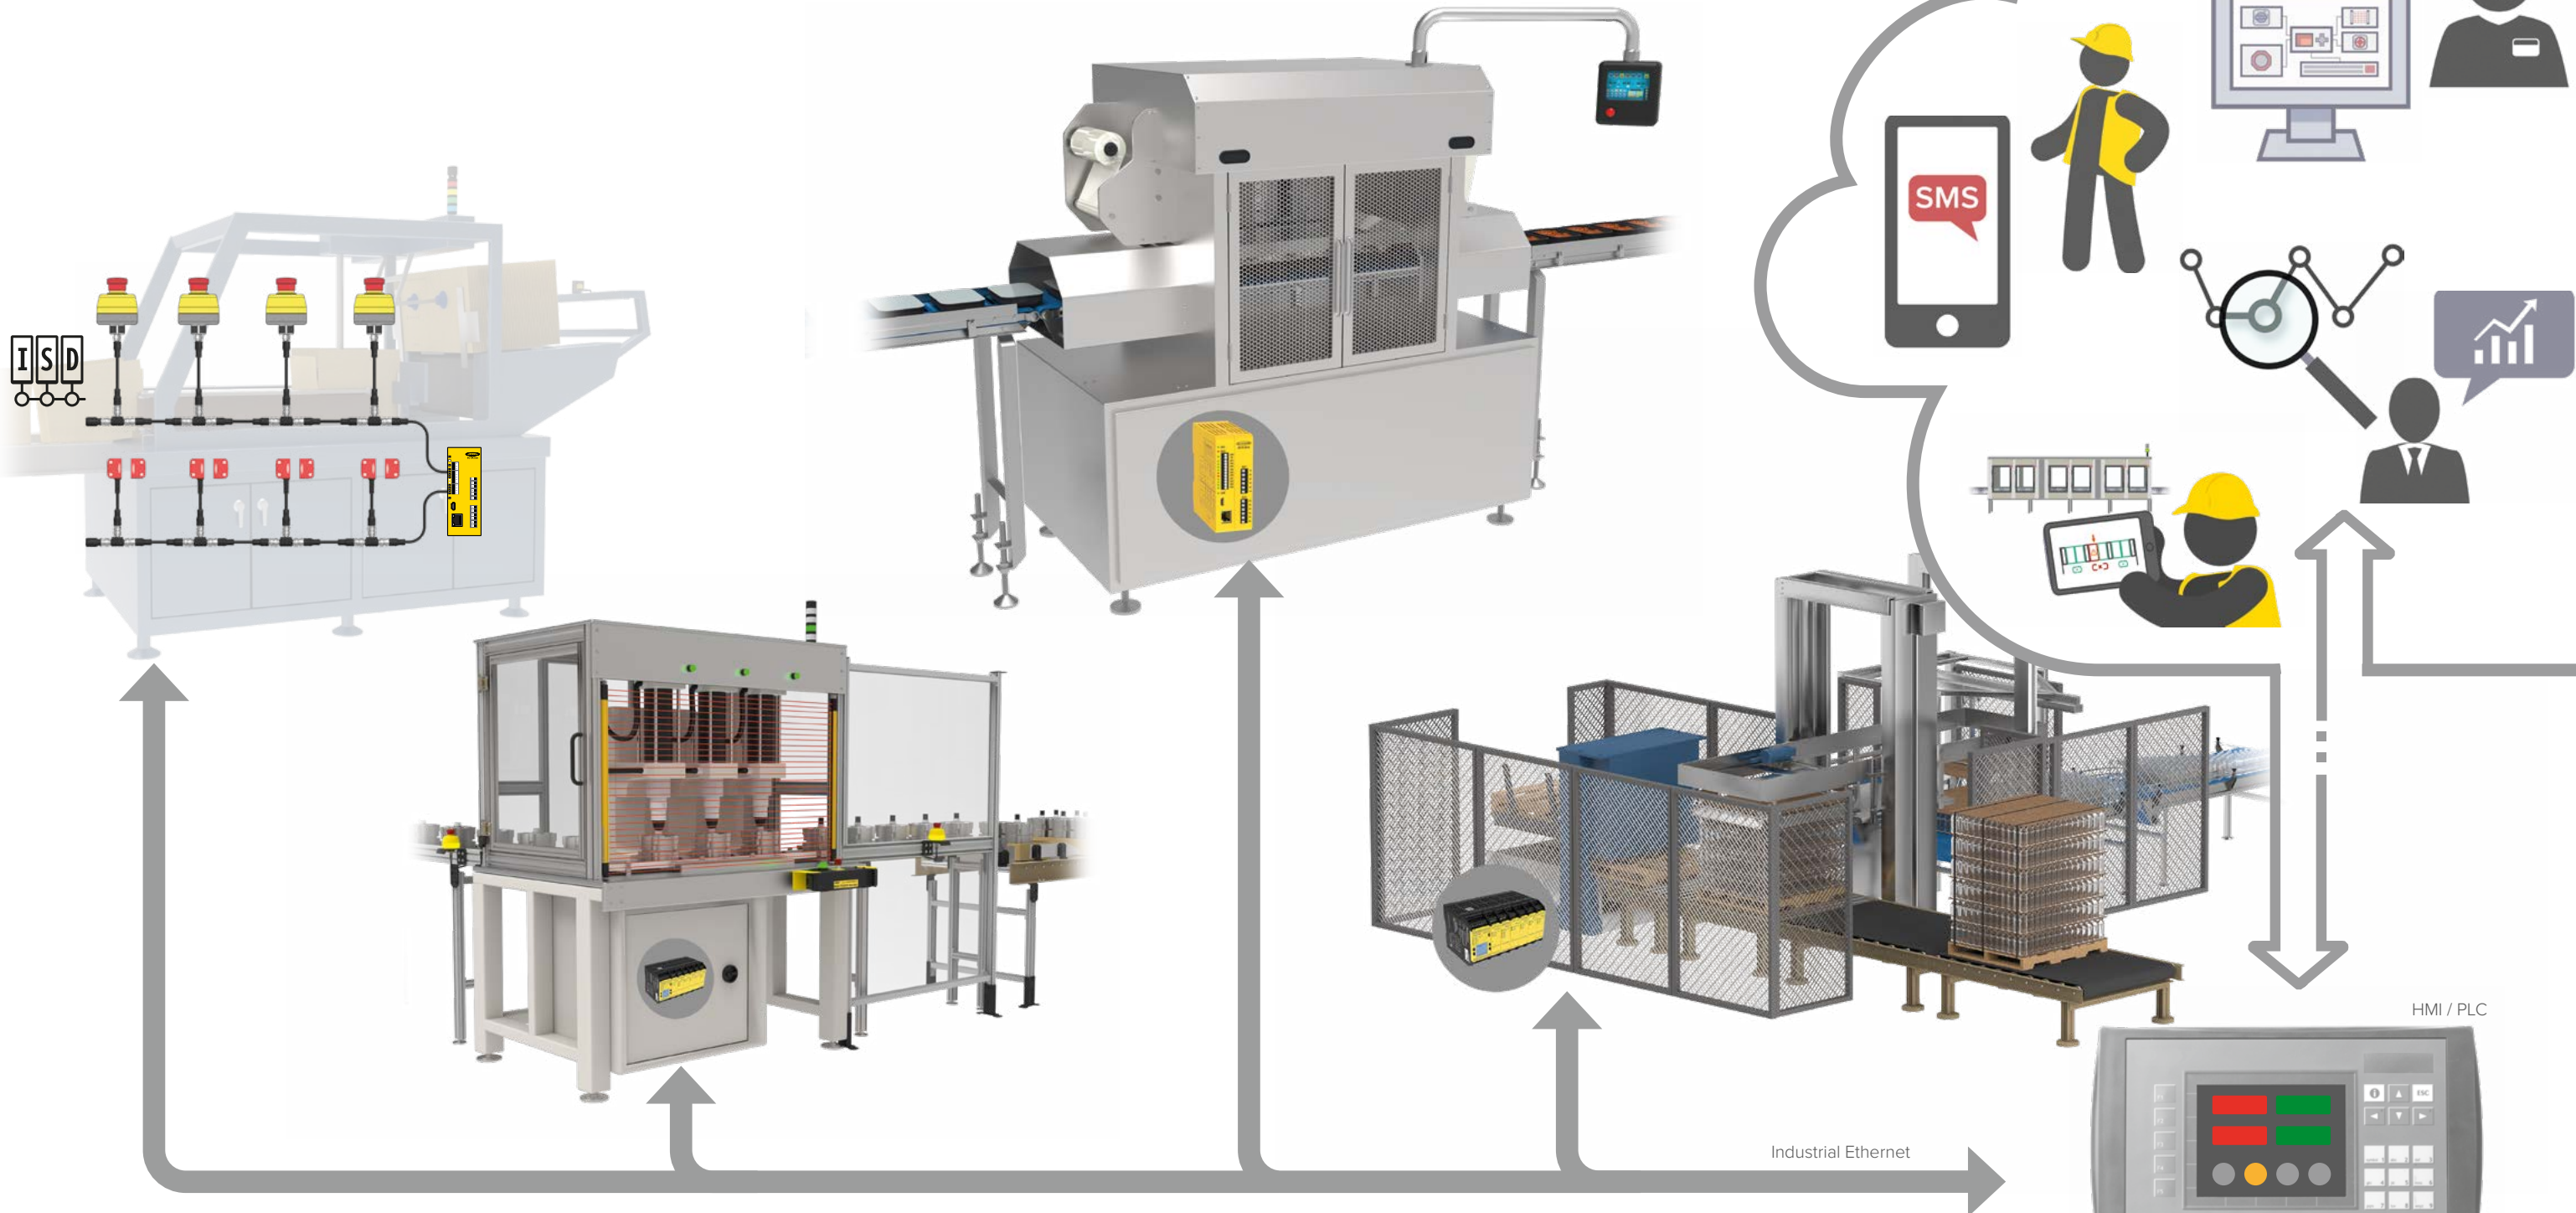

### Banner In-Series Diagnostics

- Up to 32 ISD devices connected with one in-series cable communicate directly with PLC/HMI
- ISD provides an array of data including device status, voltage, temperature, RFID tag value, sensing distance, and more

1234567890

74.5°C

13.7v

Status: ON

Alignment: OK

08.0mm

### Safety System Diagnostics

- Reduce downtime by quickly diagnosing safety events and displaying them on the HMI
- Prevent downtime with ISD preventive maintenance alerts

### Virtual Reset

- Eliminate physical button & wires
- Reset from touch screen HMI over Industrial Ethernet

EtherNet/IP

Modbus TCP/IP

PROFINET

EtherCAT



Intuitive setup and PLC integration

Free, easy-to-use PC software

- Export tag feature for easy tag creation in a PLC (patent pending)



# ISD Banner In-Series Diagnostics (ISD)

## Easy-to-Implement Diagnostic Capabilities for Complex Safety Systems

In-Series Diagnostics allows connection of up to 32 devices with one in-series connection and communicate directly with the most commonly used PLCs.

When a safety event occurs the system receives an alert that includes information about which safety device tripped, making troubleshooting a breeze.

In-Series Diagnostics provides an array of additional data points for each in-series device used, including a unique tag value, internal temperature, voltage, and more, along with device-specific details such as the alignment and distance between a safety switch's sensor and actuator.

Additionally, the system sends warning alarms if devices are near to tripping, so issues can be addressed before your machine shuts down.



Cut Costs




Simplify Installation & Troubleshooting




Prevent & Reduce Downtime



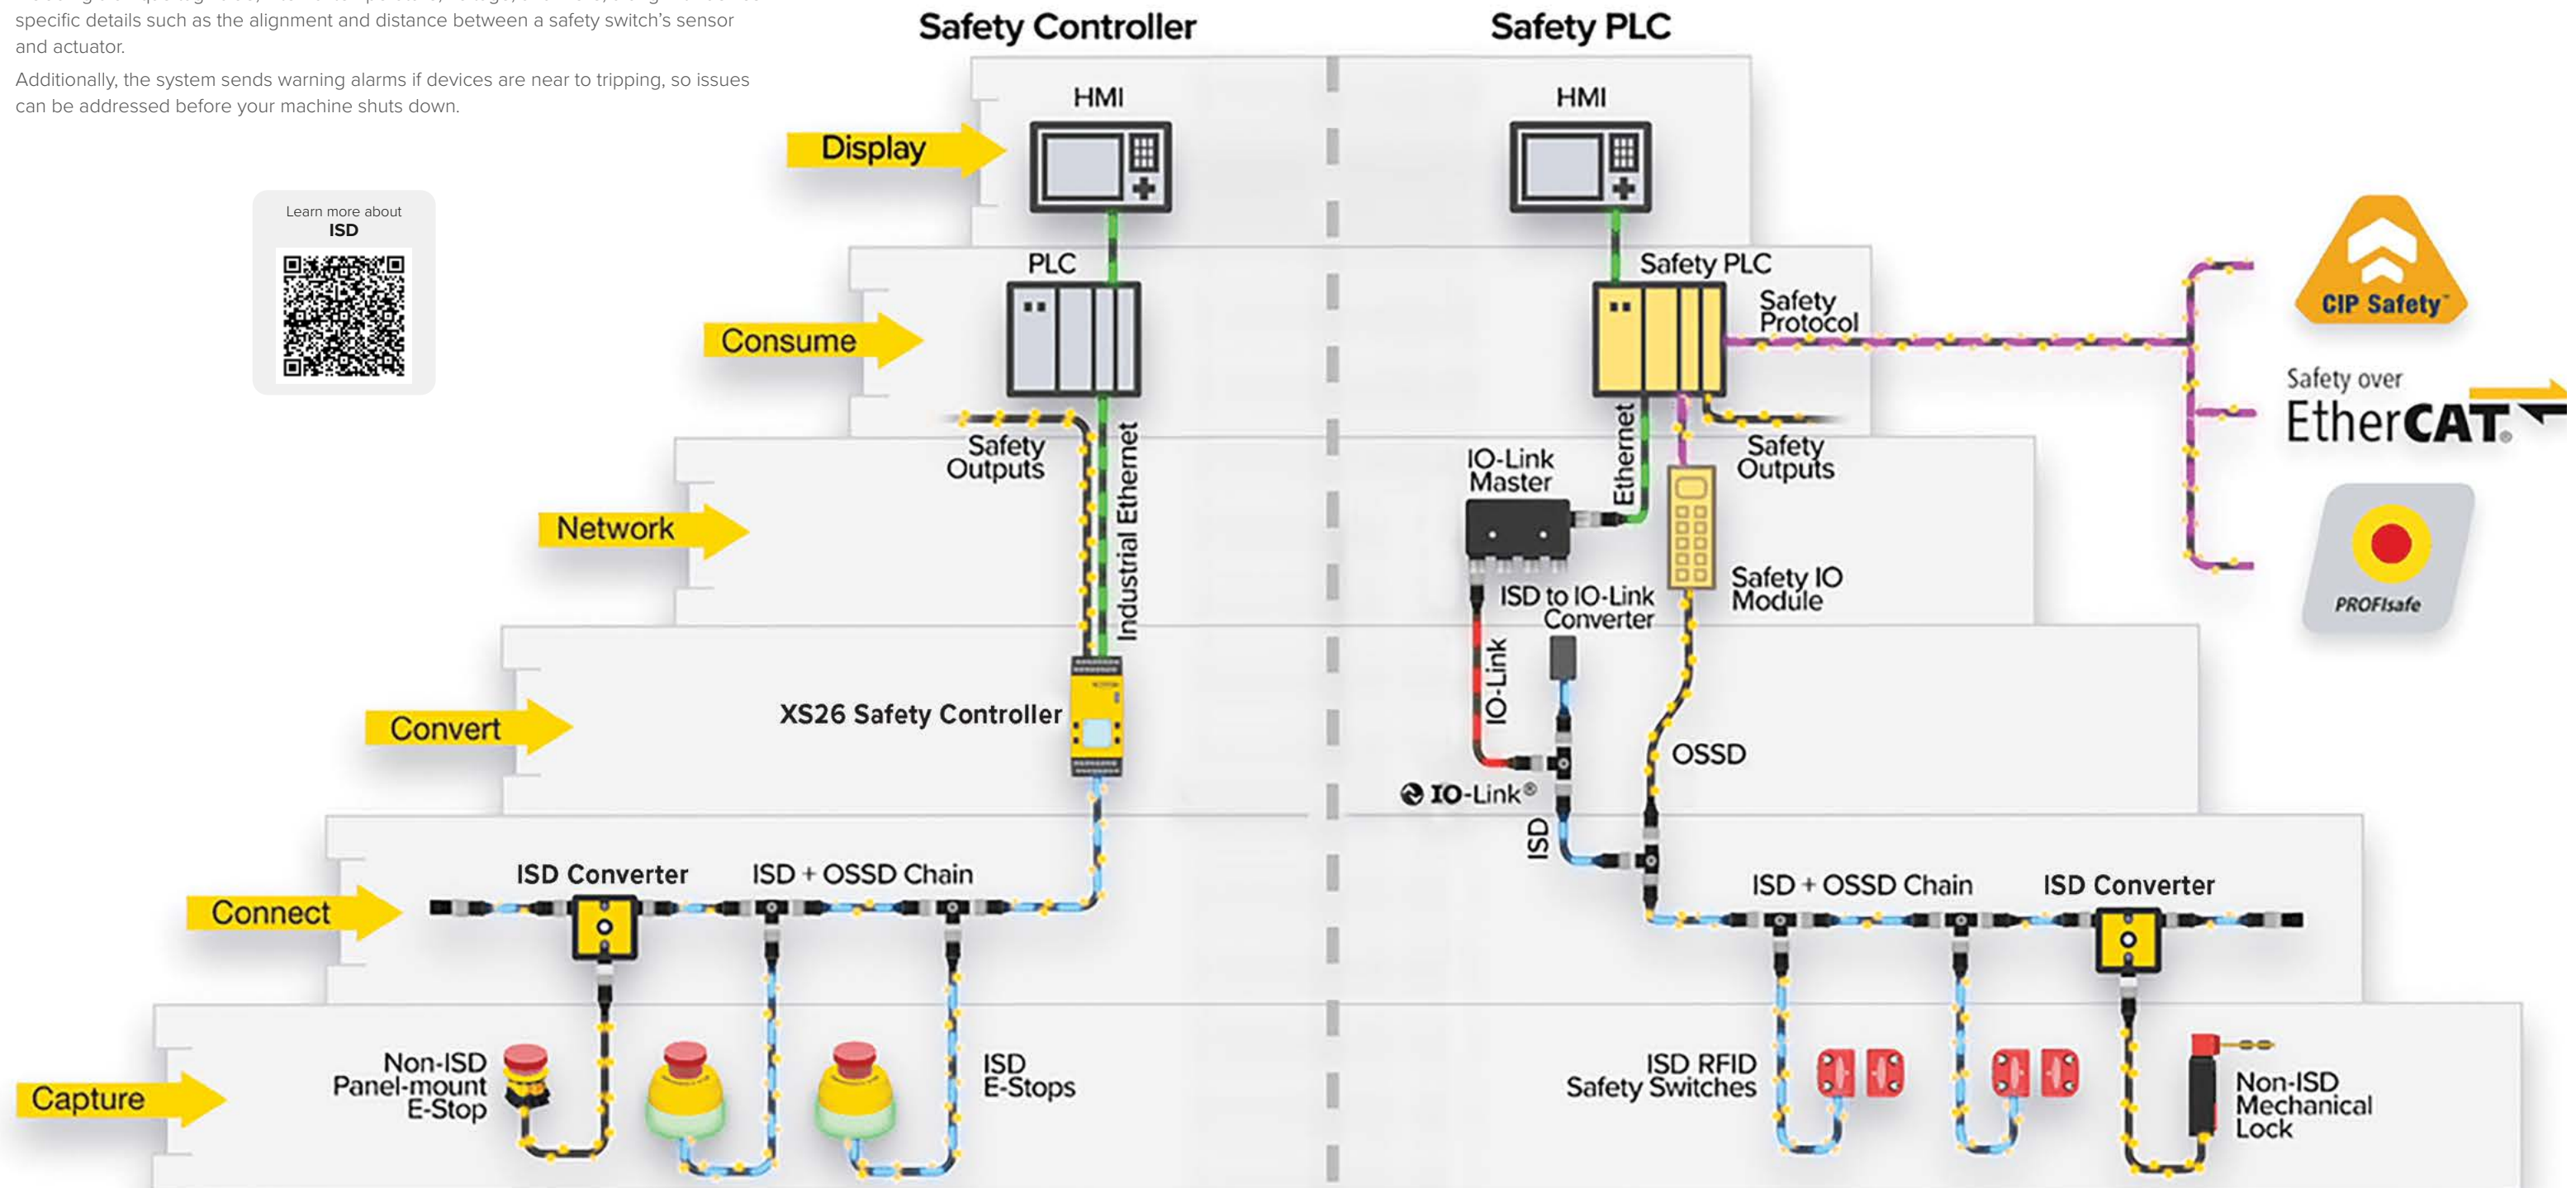



Learn more about ISD

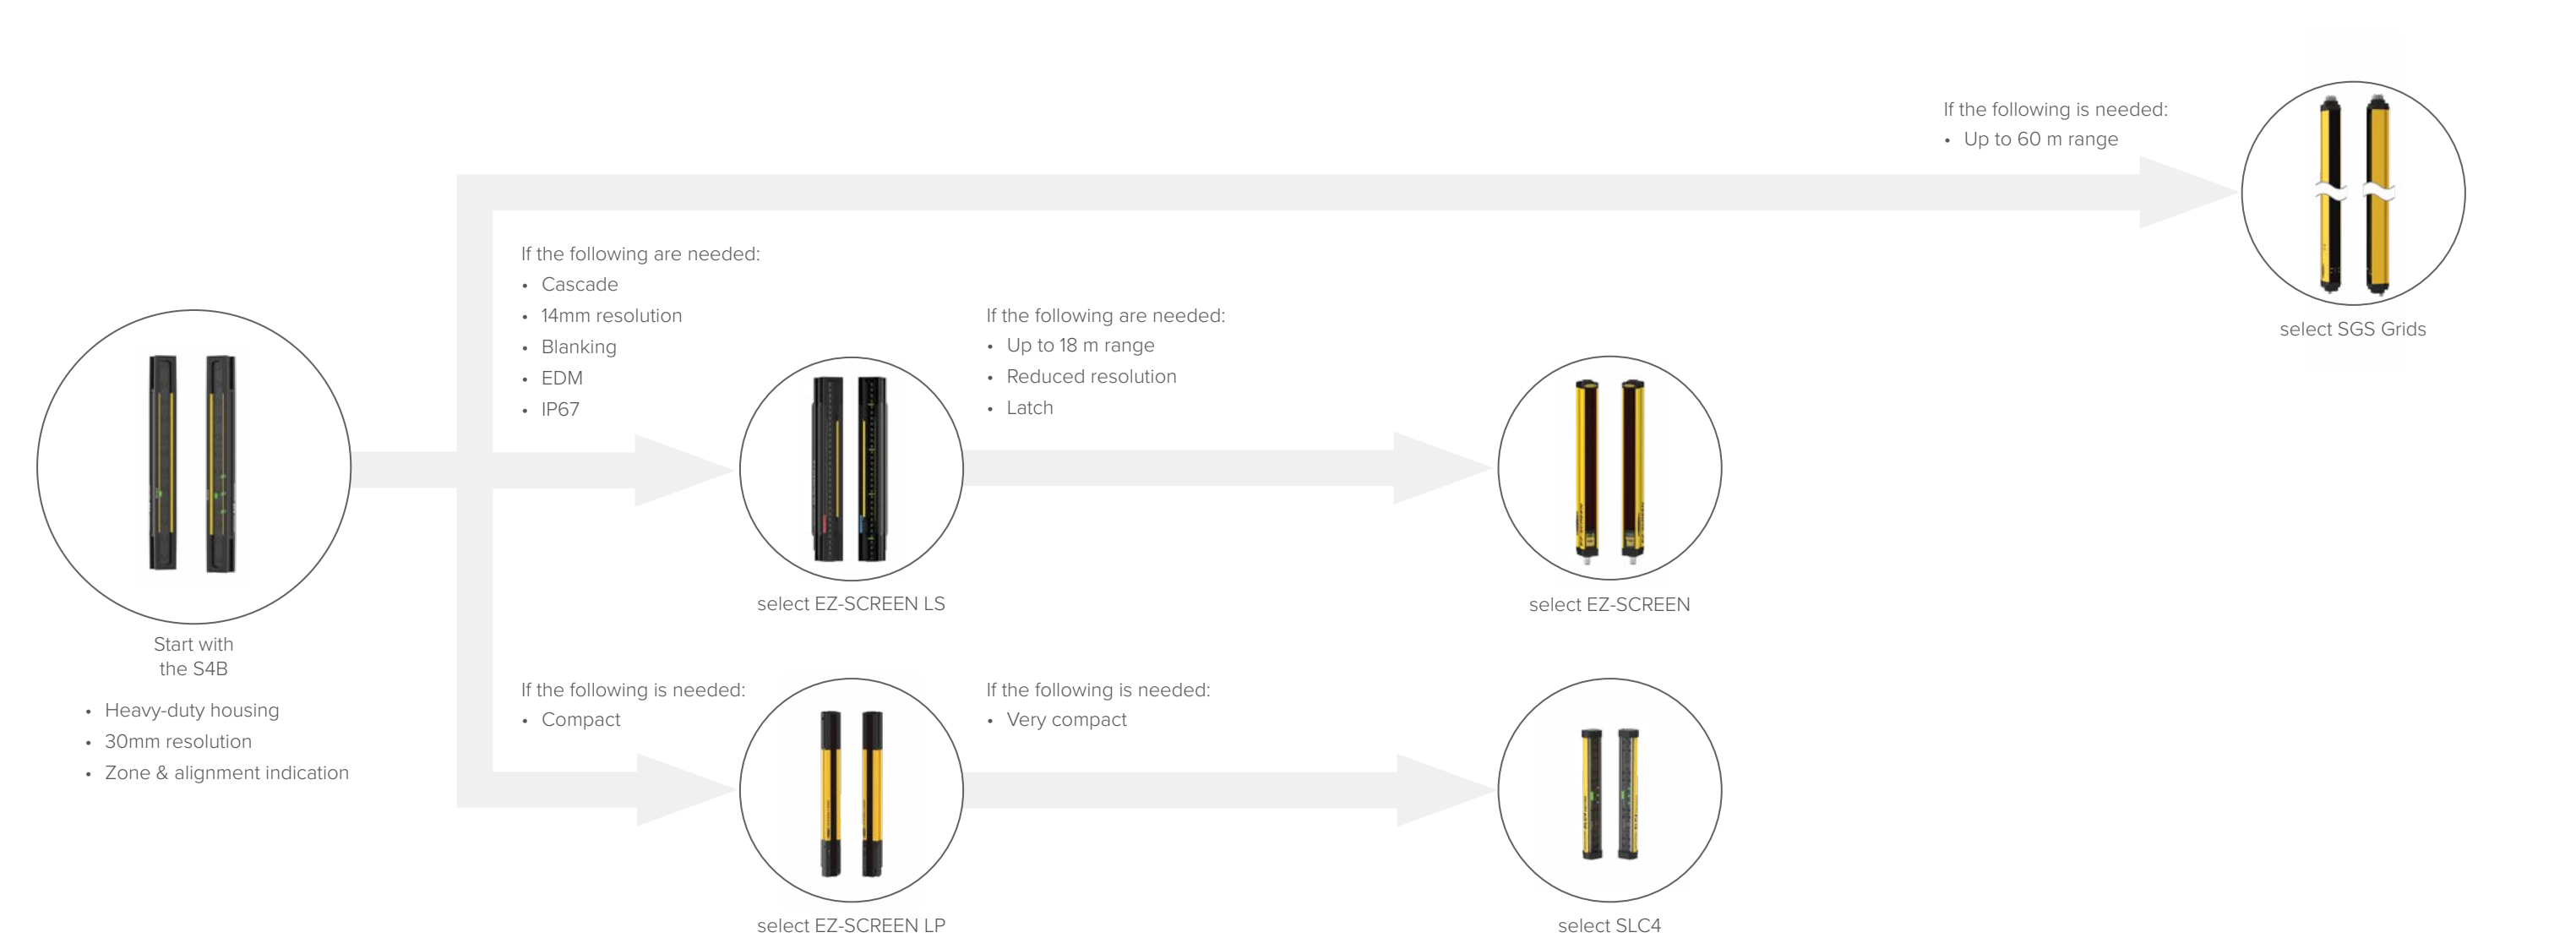










# Choosing a Banner Safety Light Curtain



	 S4B	 EZ-SCREEN LS	 EZ-SCREEN LP	 SLC4	 EZ-SCREEN	 SGS Grids
Resolution (mm)	30	14, 23, 40	14, 25	14, 24	14, 30	300, 400, 500
Range (m)	12	12	7	2	6, 18	8, 30, 60
Defined Area (mm)	300 to 1800	280 to 2380	270 to 1250	160 to 320	150 to 2400	500 to 1200
Integral Muting			✓			✓




# Safety Light Curtain Selection Guide

								
	S4B	EZ-SCREEN LS	EZ-SCREEN 14/30		EZ-SCREEN LP	SLC4	EZ-SCREEN LS2	SGS Grids
	p. 14	p. 16	p. 20		p. 22	p. 24	p. 26	p. 28
Type IEC 61496-1, -2	Type 4	Type 4	Type 4		Type 4	Type 4	Type 2	Type 4
Safety Rating EN ISO 13849-1; IEC 61508; IEC 62061	Category 4 PL e; SIL3	Category 4 PL e; SIL3	Category 4 PL e; SIL3		Category 4 PL e; SIL3	Category 4 PL e; SIL3	Category 2 PL c	Category 4 PL e; SIL3
IP Rating	IP65	IP65, IP67, IP69	IP65		IP54, IP65	IP65	IP65	IP65
Dimensions W x D (mm)	38 x 38	36 x 45	36 x 45		28 x 26	27 x 22	25 x 32	52 x 56.9
Resolution (mm)	30	14, 23, 40	14	30	14, 25	14, 24	30	300, 400, 500
Max Sensing Range (m)	12	12	6	18	Basic: 4 Standard: 7	2	15	Standard: 30 Long Distance: 60
Defined Area (mm)	300 to 1800	280 to 2380	150 to 1800	150 to 2400	Basic: 270, 410, 550, 690 Standard: 270 to 1250	160, 240, 320	150 to 1800	500 to 1200
Increments (mm)	150	70	150		Standard: 140	80	150	2, 3, 4 Beams
Functions								
Hand Detection	✓	✓	✓		✓	✓	✓	
Finger Detection		✓	✓		✓	✓		
Body Detection								✓
Cascade		SLLC	SLSC		SLPC			
Scan Codes	✓	✓	✓		✓			✓
Fixed Blanking		✓	✓		✓			
Reduced Resolution			✓		✓			
EDM		✓	✓		✓		✓	✓
Reset			✓		✓		✓	✓
Integrated Muting		See page 18			✓			✓
LED on Top		Accessory						✓



# S4B Type 4 Heavy-Duty Light Curtains

Designed for a broad range of applications, the next generation of safety light curtains has essential features including remote indication for predictive maintenance.

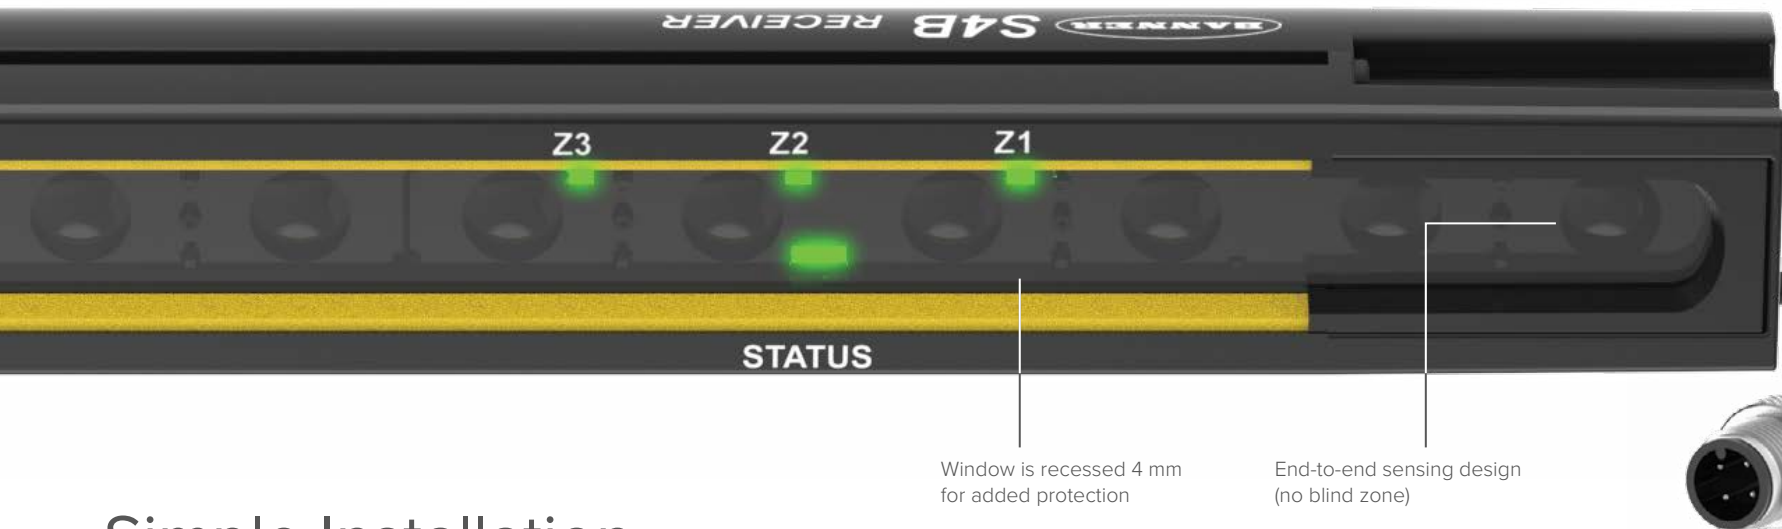


Window is recessed 4 mm for added protection

End-to-end sensing design (no blind zone)

## Prevent Downtime


Yellow indicates a weak signal due to a dirty lens.

A weak beam strength output is sent via pin 5 to a PLC or HMI alerting operators to preventive maintenance needs.

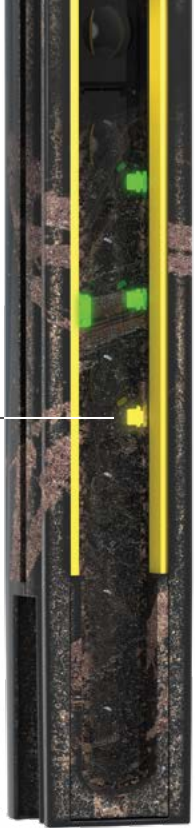

## Eliminate Costly Repairs

Removable cordset with 5-pin M12 QD allows for cost effective replacement of only the damaged component




## Reliable Hand Detection

The S4B features a 30-millimeter resolution for reliable hand detection

## Simple Installation


The S4B is designed and optimized for easy and intuitive installation, operation, and troubleshooting. Zone LEDs aid troubleshooting and help reduce downtime.

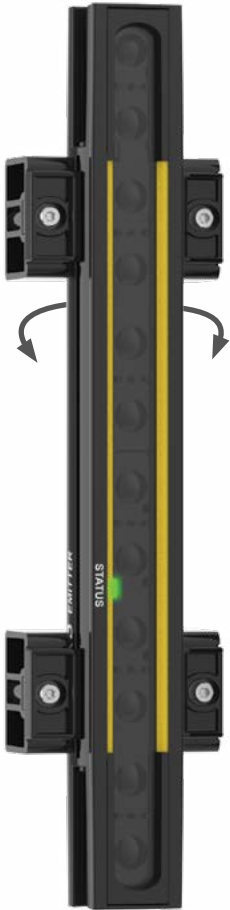

Rotating and locking brackets




## Alignment Zone Indicators




**Misaligned**

Red indicates a loss of signal due to a blocked beam or significant misalignment



**Weak**

Yellow indicates a weak signal due to a slight misalignment



**Aligned**

Green indicates a strong signal, proper alignment, and clear of obstruction

## Intuitive Setup and Swap-out

Select and save scan code setting without a PC for easy setup and swap-out



## 1. Select Emitter and Receiver

Family	Feature Set	Device Type	Resolution	Defined Area			Termination
<b>S4</b>	<b>B</b>	<b>E</b>	<b>30</b>	—	<b>900</b>	—	<b>S</b>
B = Basic		E = Emitter only R = Receiver only		30 = 30 mm	300 = 300 mm 450 = 450 mm 600 = 600 mm 750 = 750 mm	900 = 900 mm 1050 = 1050 mm 1200 = 1200 mm 1350 = 1350 mm 1500 = 1500 mm 1650 = 1650 mm 1800 = 1800 mm	S = Emitter or Receiver only (S4B bracket(s) and S4B cordset(s) sold separately)

## 2. Add S4B Brackets (required)



S4BA-MBK-16

- Side mount bracket
- Rotation: +/- 15°
- Includes 2 brackets and hardware
- Each bracket supports 900 mm of length

## 3. Add S4B Cordsets (required)





DES4E-51D

- S4B removable 5-pin M12 QD pigtail
- Includes one



# EZ-SCREEN LS Type 4 Heavy-Duty Light Curtains

The LS is a full-feature family of light curtains providing greater capabilities for cascading, blanking, EDM and more.

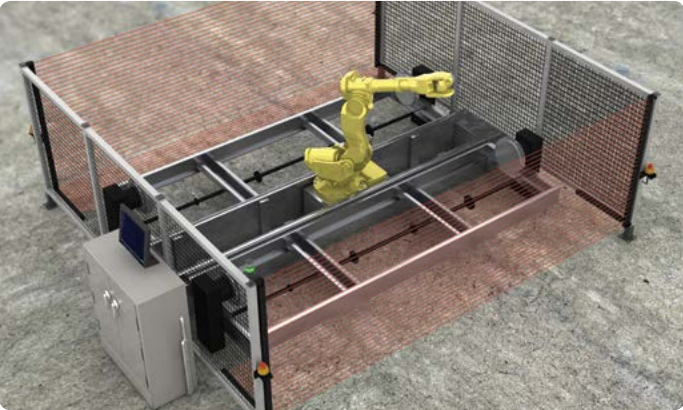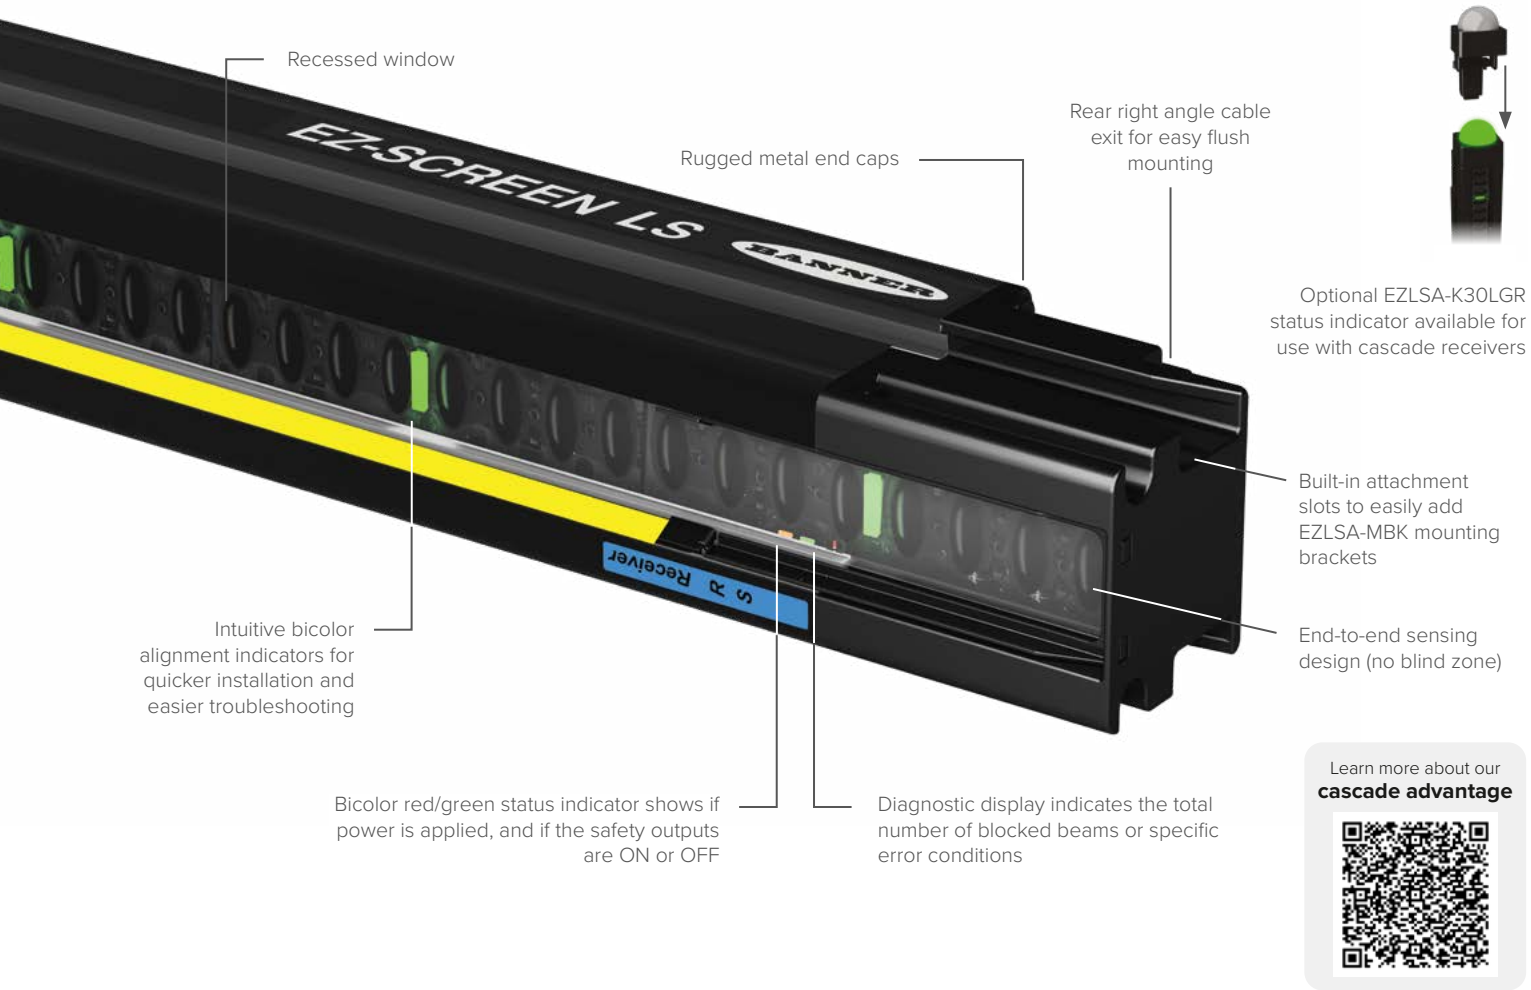

Due to its robust design, the EZ-SCREEN LS is the perfect fit in large robotic cell applications that require sturdy safety devices and heavy duty enclosures.



EZ-SCREEN LS light curtains in hygienic tubular enclosures successfully protect operators from injury and remain hygienic for easy cleaning procedures.

## 1. Select Emitter, Receiver, or Pair

Family	Cascade	System Type	Resolution	Defined Area		Termination
<b>SLL</b>		<b>E</b>	<b>14</b>	—	<b>910</b>	<b>S</b>
<b>Blank</b> = Standard <b>C</b> = Cascade		<b>E</b> = Emitter only <b>R</b> = Receiver only <b>P</b> = Pair (Emitter and Receiver)	<b>14</b> = 14 mm <b>23</b> = 23 mm <b>40</b> = 40 mm	<b>280</b> = 280 mm* <b>350</b> = 350 mm <b>420</b> = 420 mm <b>490</b> = 490 mm <b>560</b> = 560 mm <b>630</b> = 630 mm <b>700</b> = 700 mm <b>770</b> = 770 mm <b>840</b> = 840 mm	<b>910</b> = 910 mm <b>980</b> = 980 mm <b>1050</b> = 1050 mm <b>1120</b> = 1120 mm <b>1190</b> = 1190 mm <b>1260</b> = 1260 mm <b>1330</b> = 1330 mm <b>1400</b> = 1400 mm <b>1470</b> = 1470 mm	<b>1540</b> = 1540 mm <b>1610</b> = 1610 mm <b>1680</b> = 1680 mm <b>1750</b> = 1750 mm <b>1820</b> = 1820 mm <b>1960L</b> = 1960 mm** <b>2100L</b> = 2100 mm** <b>2380L</b> = 2380 mm**

\*Not available in cascade models  
\*\*23 mm resolution, IP65, 10 m range

**S** = emitter or receiver only (LS bracket(s) and LS cordset(s) ordered separately)  
**P5** = Emitter or receiver includes one LS M12 double ended cordset (5-pin) and LS brackets (-11 and -12)  
**P55** = Pair includes two LS M12 double ended cordsets (5-pin) and LS brackets (-11 and -12)  
**P8** = Emitter or receiver includes one LS M12 double ended cordset (8-pin) and LS brackets (-11 and -12)  
**P88** = Pair includes two LS M12 double ended cordsets (8-pin) and LS brackets (-11 and -12)  
**Blank** = Emitter, receiver or pair includes LS brackets (-11 and -12), LS cordset ordered separately

## 2. Add LS Brackets (for "-S" termination)



EZLSA-MBK-11

- End mount slotted steel bracket
- Rotation: 360° in 23° increments
- Includes two brackets
- Slotted mounting holes spaced 20 mm on-center



EZLSA-MBK-12

- Center mount steel bracket
- Rotation: +/- 15°
- Includes one bracket
- Use with EZLSA-MBK-11/-20 with a max of 980 mm unsupported



EZLSA-MBK-16

- Side mount die-cast bracket
- Rotation: +15° and -20°
- Includes one bracket
- Use one or multiple with a max of 980 mm unsupported



EZLSA-MBK-20

- End mount universal steel bracket
- Rotation: 360° in 23° increments
- Includes two brackets
- Universal mounting slots

## 3. Add LS Cordsets (for "-S" or "Blank" termination)



LS-Custom to M12 Double Ended

**DELSE-51D (5-Pin)**  
0.3 m (1')

**DELSE-81D (8-Pin)**  
0.3 m (1')



Single Ended LS-Custom to Flying Leads

**RDLS-515D (5-Pin)**  
4.6 m (15')

**RDLS-815D (8-Pin)**  
4.6 m (15')

**RDLS-825D (8-Pin)**  
8 m (26')

**RDLS-850D (8-Pin)**  
15.3 m (50')



Double-Ended RD to RD Cordsets for Cascade Systems

**DELS-111E**  
0.3 m (1')

**DELS-113E**  
1 m (3.3')

**DELS-1115E**  
4.6 m (15.1')

IP69 Hygenic

Family

EZLSA-HTE

System Type

R

Resolution

23

Defined Area

910

Termination

E = Emitter  
R = Receiver

23 = 23 mm

280 = 280 mm\*  
350 = 350 mm  
420 = 420 mm  
490 = 490 mm  
560 = 560 mm  
630 = 630 mm

700 = 700 mm  
770 = 770 mm  
840 = 840 mm  
910 = 910 mm  
980 = 980 mm  
1050 = 1050 mm

\*Not available with remote fixed blanking option

Blank = 7.6 m, 8-wire high durometer PVC cordset  
F = Remote Fixed Blanking Receiver model with additional 7.6 m cordset for blanking configuration

Brackets

EZLSA-MBK-HTE-1

Stamped stainless steel bracket  
360° rotation for IP69 enclosure models  
Two brackets per optional kit

EZLSA-MBK-HTE-2


Hygienic stainless steel bracket  
360° rotation for IP69 enclosure models  
Two brackets per optional kit

Mute Arm Kits


Create a turn-key muting solution for your EZ-SCREEN LS Safety Light Curtain

With a 300 mm (1 ft) PVC cable with a 8-pin M12 male quick disconnect


Needs EZ-SCREEN LS Hardware Adaptor Kit EZLSA-MCB-HW

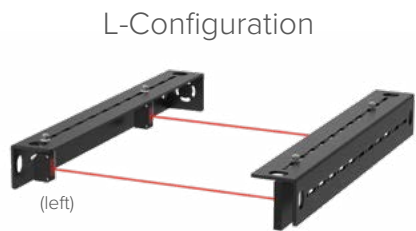


SGSA-ML-L-LPQ20  
Includes 2 mute arms, 2 SGSA-Q20PLPQ5 mute sensors, and 2 retroreflectors

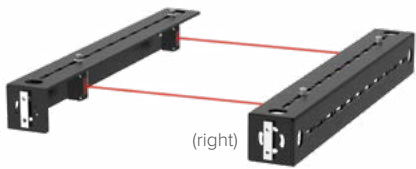

SGSA-ML-R-LPQ20  
Includes 2 mute arms, 2 SGSA-Q20PLPQ5 mute sensors, and 2 retroreflectors

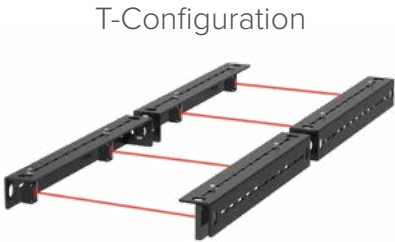


SGSA-MT-LPQ20  
Includes 4 mute arms, 4 SGSA-Q20PLPQ5 mute sensors, and 4 retroreflectors

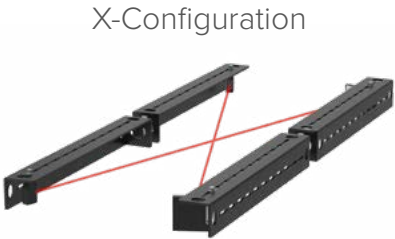

SGSA-MX-LPQ20  
Includes 4 mute arms, 2 SGSA-Q20PLPQ5 mute sensors, and 2 retroreflectors

Muting System Diagram

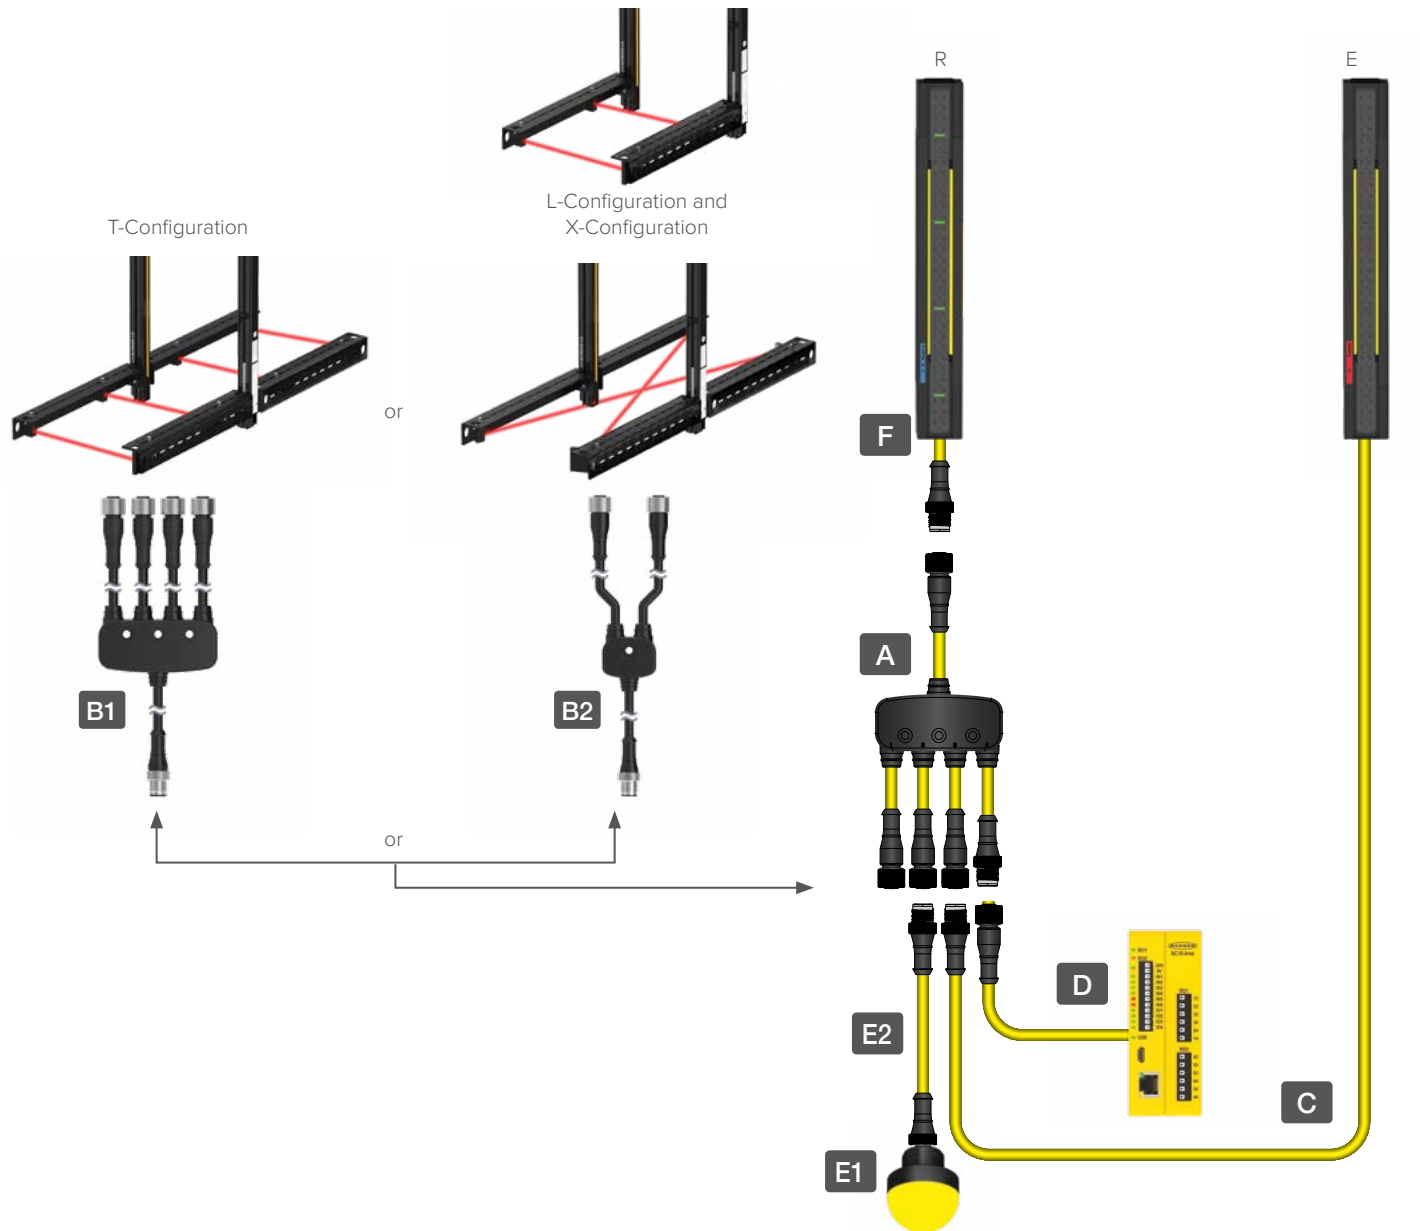

Connection Cables		Mute Lights and Cables	
A	CSM4-M1281M1251M1281 LS muting connection cable	E1	TL50WQ, TL50YQ, K50LWXXPQ, K50LYXXPQ Mute lights (xx is the length in feet)
B	SGS mute arm kit connection cable (select one) B1: T-Muting: CSA4-M1251M1251M1251M1251 B2: L-Muting or X-Muting: CSA-M1241M1241	E2	DEE2R-5xx Mute light cable (xx is the length in feet)
C	DEE2R-8xxD LS emitter connection cable (xx is the length in feet)	Interface options	
D	QDEG-12xxE Safety controller connection cable (xx is the length in feet)		
F	DELSE-81D (8-Pin) LS receiver connection cable (M12)	Interface Modules (see page 52)	



# EZ-SCREEN 14/30 Type 4 Light Curtains

Banner's traditional light curtain, the EZ-Screen 14/30 provides the longest sensing range, reduced resolution, and includes trip or latch/reset functionality.



Learn more about our  
**cascade advantage**

## 1. Select Emitter and Receiver

Family	Cascade	System Type	Resolution	Defined Area		Finish	Termination
<b>SLS</b>	<b>C</b>	<b>P</b>	<b>14</b>	—	<b>150</b>		<b>Q88</b>
<b>C</b> = Cascade <b>Blank</b> = No cascading		<b>E</b> = Emitter <b>R</b> = Receiver <b>P</b> = Pair	<b>14</b> = 14 mm <b>30</b> = 30 mm	<b>150</b> = 150 mm* <b>300</b> = 300 mm <b>450</b> = 450 mm <b>600</b> = 600 mm <b>750</b> = 750 mm <b>900</b> = 900 mm <b>1050</b> = 1050 mm <b>1200</b> = 1200 mm	<b>1350</b> = 1350 mm <b>1500</b> = 1500 mm <b>1650</b> = 1650 mm <b>1800</b> = 1800 mm <b>1950</b> = 1950 mm** <b>2100</b> = 2100 mm** <b>2250</b> = 2250 mm** <b>2400</b> = 2400 mm**		
<p>*Not available in cascade models **Only available in 30 mm resolution</p> <p><b>Blank</b> = Yellow powder coat <b>N</b> = Nickel-plated ESD (ESD-safe models are not available with pigtail QD) <b>A</b> = Clear anodized aluminium</p>							
<p><b>Q8</b> = 8-pin M12 QD (individual Emitter or Receiver models) <b>P8</b> = 8-pin M12 pigtail QD (individual Emitter or Receiver models) <b>Q88</b> = For Pair – Emitter with 8-pin M12 QD, Receiver with 8-pin QD <b>P88</b> = For Pair – Emitter with 8-pin M12 pigtail QD, Receiver with 8-pin M12 pigtail QD</p>							

## 2. Add Brackets

**EZA-MBK-11**

- Standard mounting L-bracket

**EZA-MBK-12**

- Center mounting bracket

**EZA-MBK-20**



- Retrofit bracket for mounting to engineered/slotted aluminum framing

**EZA-MBK-21**

- Mounting bracket system for L configuration of two cascaded light screens
- One EZA-MBK-21 kit contains brackets for one side of an L-mounting configuration

# EZ-SCREEN LP Type 4 Compact Light Curtains

Banner's compact full-feature family of light curtains providing capabilities for cascading, blanking, integral muting, latch/reset, EDM, and more.

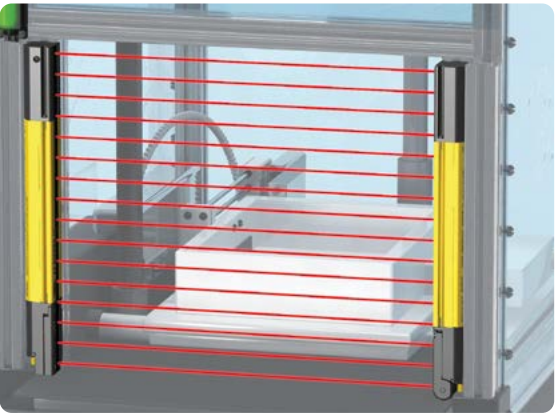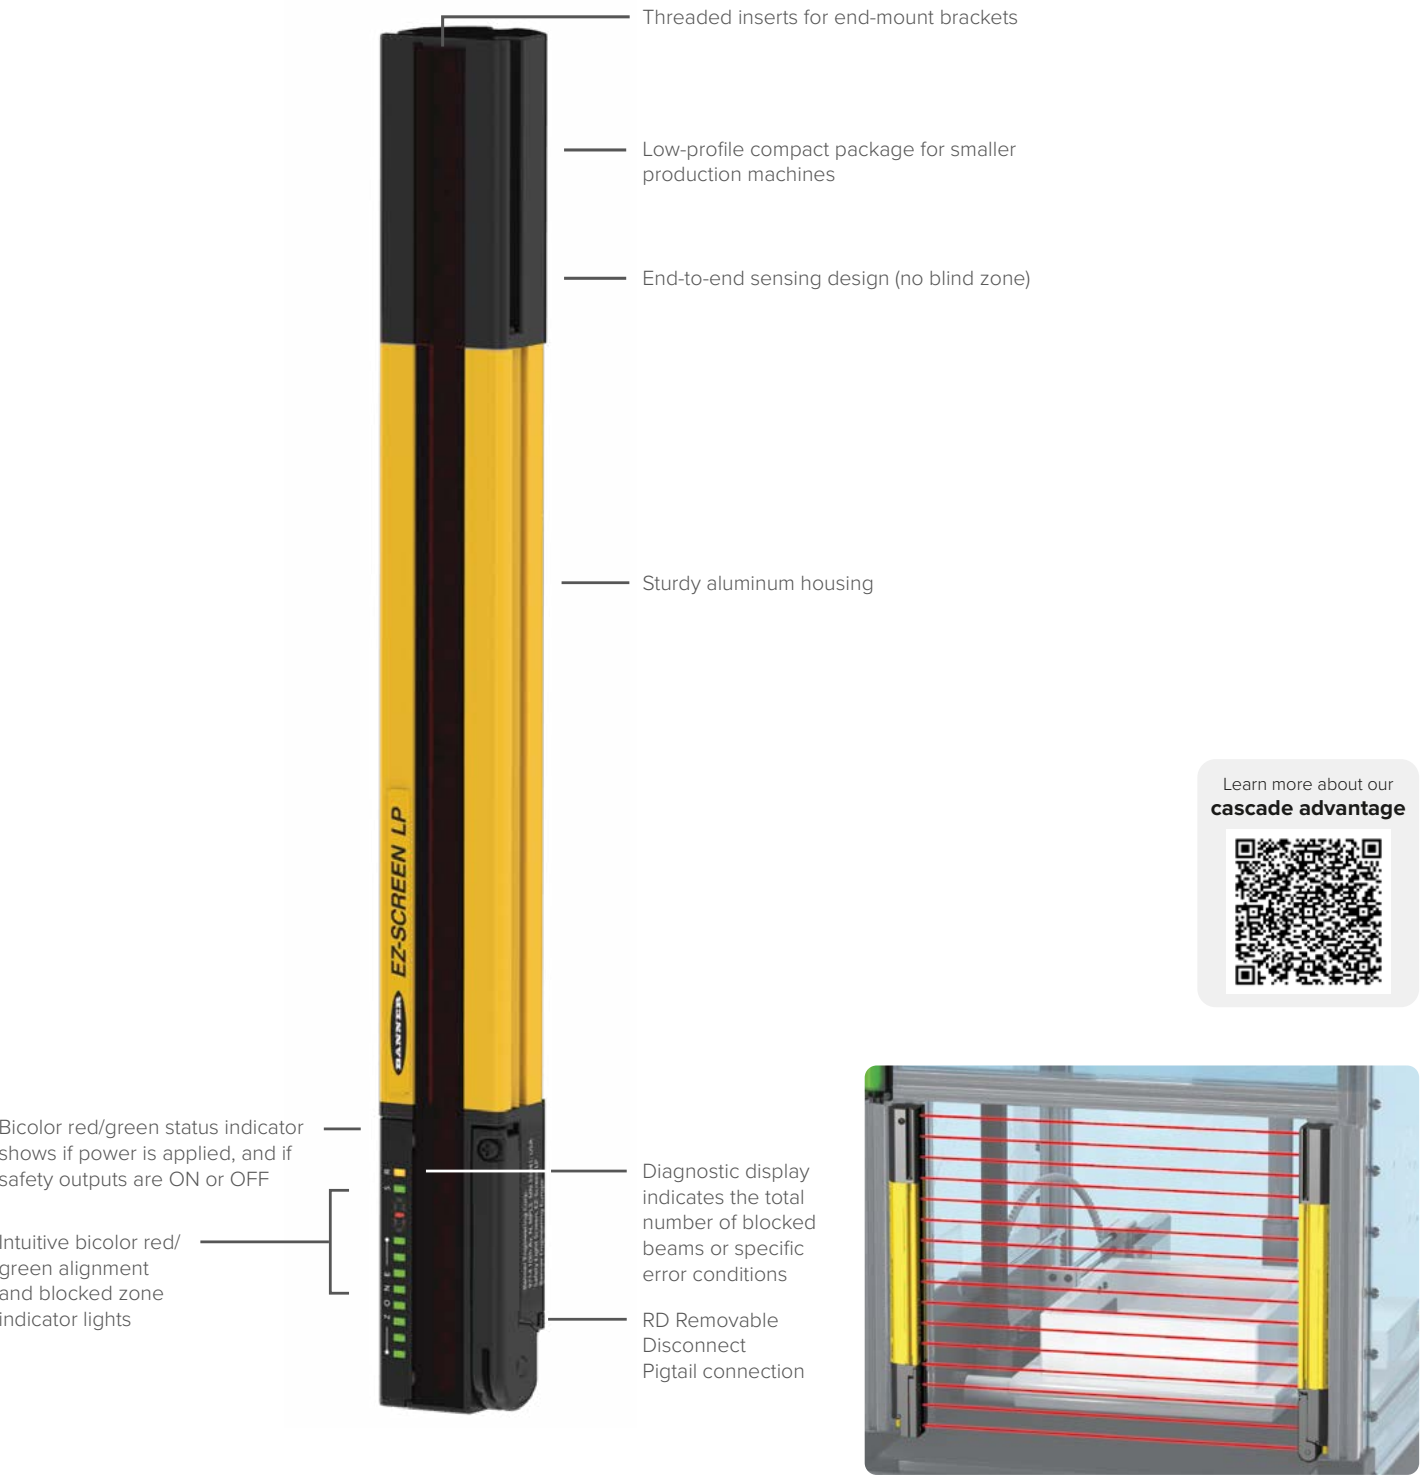

The EZ-SCREEN LP safety light screen is compact and mounts in tight spaces with its continual end-to-end sensing that leaves no gaps.

## 1. Select Emitter and Receiver

### EZ Screen LP

Family	Cascade	System Type	Resolution	Defined Area		Termination
SLP	C	P	14	—	410	P88
	C = Cascade* Blank = Standard VA = LP Basic	P = Pair (Emitter and Receiver) E = Emitter only R = Receiver only	14 = 14 mm 25 = 25 mm	270 = 270 mm** 410 = 410 mm 550 = 550 mm 690 = 690 mm	830 = 830 mm* 970 = 970 mm* 1110 = 1110 mm* 1250 = 1250 mm*	
Note: LP Basic contains individual emitter and/or receiver only. Brackets and cordset ordered separately						
P8 = 300 mm 8-Pin M12 pigtail QD (individual Emitter or Receiver models) P88 = 300 mm 8-Pin M12 pigtail QD (on BOTH Emitter and Receiver models) Blank = no pigtail, RD connection (for RDLP-8..D cordset)						
*8-pin connection required for cascade models and to enable EDM, Aux Output and Reset features **Not available in cascade models *Not available in LP Basic models						

### EZ Screen LP with Muting

Family	Resolution	Defined Area		Finish	Termination
SLPMP	14	—	410		
SLPE = Emitter SLPMR = Receiver SLPMP = Pair	14 = 14 mm 25 = 25 mm	410 = 410 mm 550 = 550 mm 690 = 690 mm 830 = 830 mm	970 = 970 mm 1110 = 1110 mm 1250 = 1250 mm	Blank = Yellow powder coat N = Nickel-plated ESD A = Clear anodized aluminium	Blank = Integral Removable Disconnect P8 = 8-pin pigtail QD (SLPE) P12 = 12-pin pigtail QD (SLPMR) P128 = For SLPMP (Pair) Emitter with 8-pin M12 pigtail QD Receiver with 12-pin M12 pigtail QD

## 2. Add Brackets


LPA-MBK-10	LPA-MBK-11	LPA-MBK-12	LPA-MBK-16	LPA-MBK-21	LP-Custom to M12 Male QD
• End mount bracket • Rotation: 40° • Includes 2 brackets and hardware • 14 ga. steel, black zinc-plated	• Standard end mount bracket • Rotation: 360° • Includes 2 brackets and hardware • 14 ga. steel, black zinc-plated	• Standard side mount bracket • Rotation: +10° and -30° • Includes 1 bracket and hardware • 14 ga. steel, black zinc-plated	• Side mount bracket • Rotation: +15° and -20° • Includes 1 bracket and hardware • Black zinc die-cast	• Pivoting cascade mounting bracket • Includes 2 brackets and hardware • 14 ga. steel, black zinc-plated	DELPE-51D (5-pin) 0.3 m (1 ft) DELPE-81D (8-pin) 0.3 m (1 ft)

## 3. Add Cordsets



# SLC4 Type 4 Ultra Compact Light Curtains

Banner's shortest, most compact light curtain is built with today's essential features including 14 mm and 24 mm resolution, zone/alignment indicators, and more.

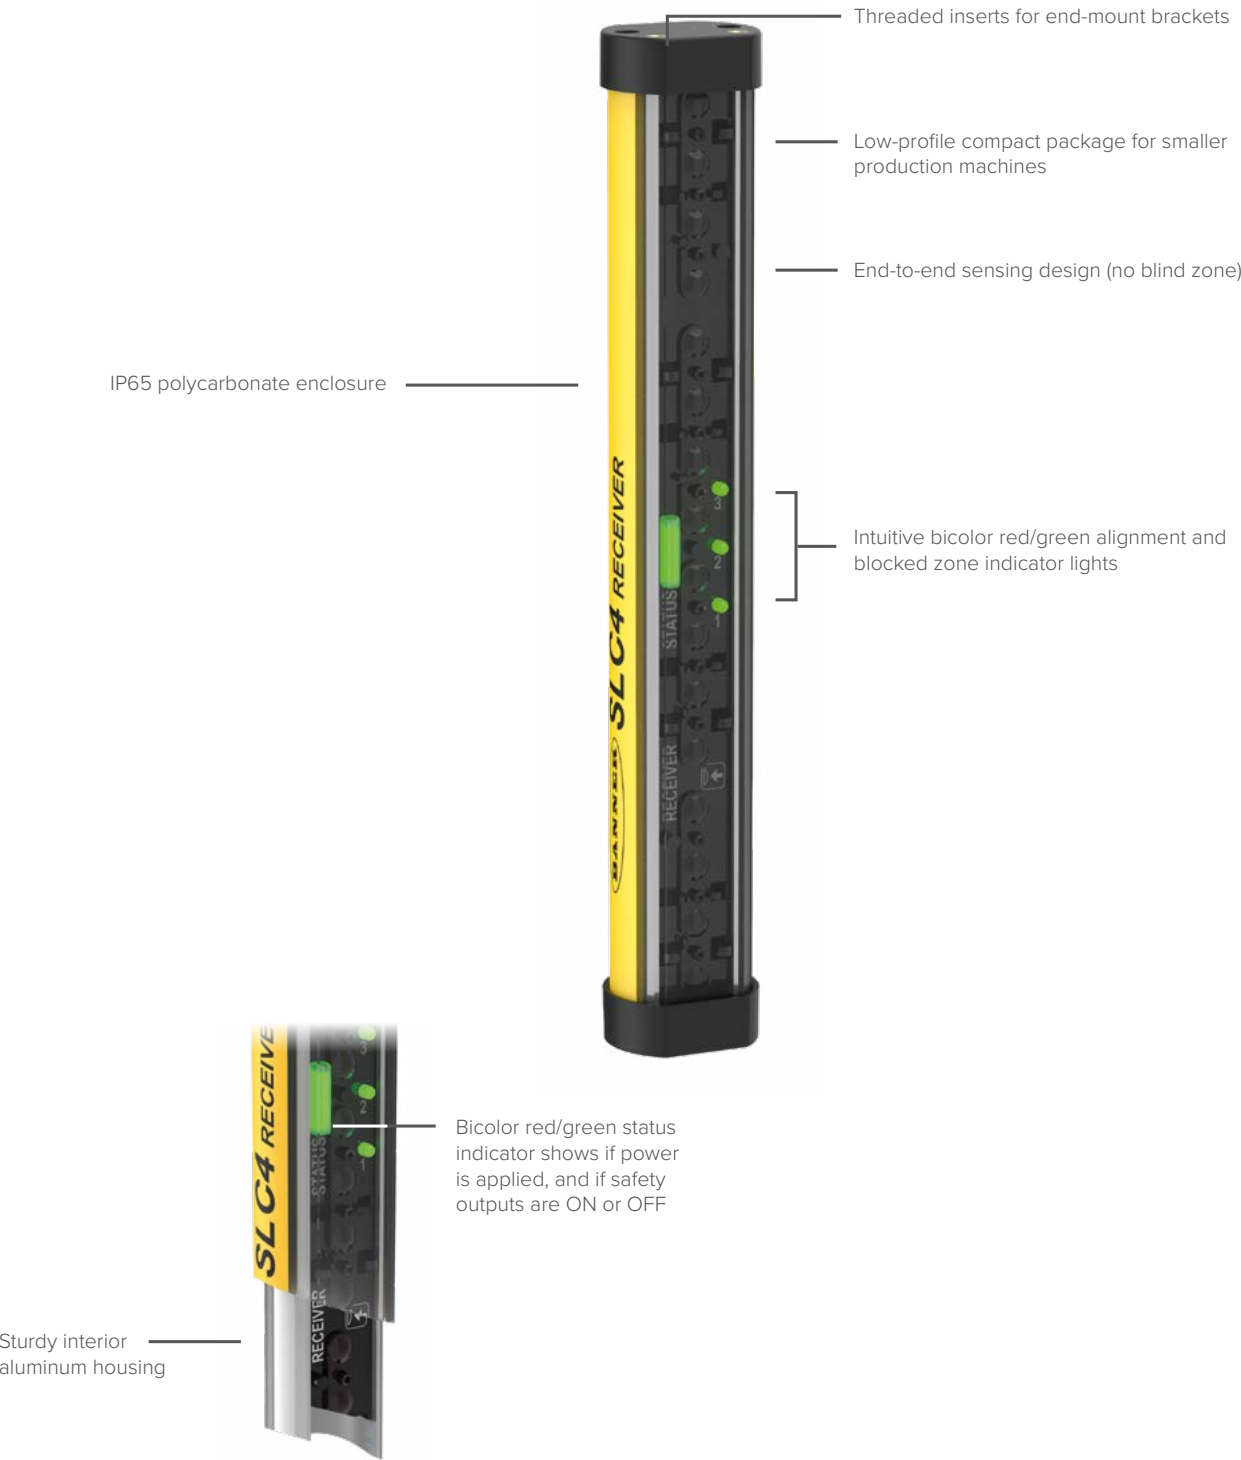


## 1. Select Emitter and Receiver

Family	System Type	Resolution	Defined Area	Termination
<b>SLC4</b>	<b>P</b>	<b>14</b>	<b>160</b>	<b>P44</b>
	P = Pair (Emitter and Receiver) E = Emitter only R = Receiver only	14 = 14 mm 24 = 24 mm	160 = 160 mm 240 = 240 mm 320 = 320 mm	P4 = 300 mm 4-Pin M12 pigtail QD (individual Emitter or Receiver models) P44 = 300 mm 4-Pin M12 pigtail QD (Pair)

## 2. Add Brackets


		
<b>SLC4A-MBK-10</b>	<b>SLC4A-MBK-11</b>	<b>SLC4A-MBK-12</b>
<ul style="list-style-type: none"><li>• End mount bracket</li><li>• Rotation: +/- 20°</li><li>• Includes 4 brackets and hardware</li><li>• 14 ga. steel, black zinc-plated</li></ul>	<ul style="list-style-type: none"><li>• End mount bracket</li><li>• Rotation: Fixed</li><li>• Includes 4 brackets and hardware</li><li>• Glass-filled polycarbonate</li></ul>	<ul style="list-style-type: none"><li>• Side mount bracket</li><li>• Rotation: +/- 15°</li><li>• Includes 2 brackets</li><li>• Glass-filled polycarbonate</li></ul>

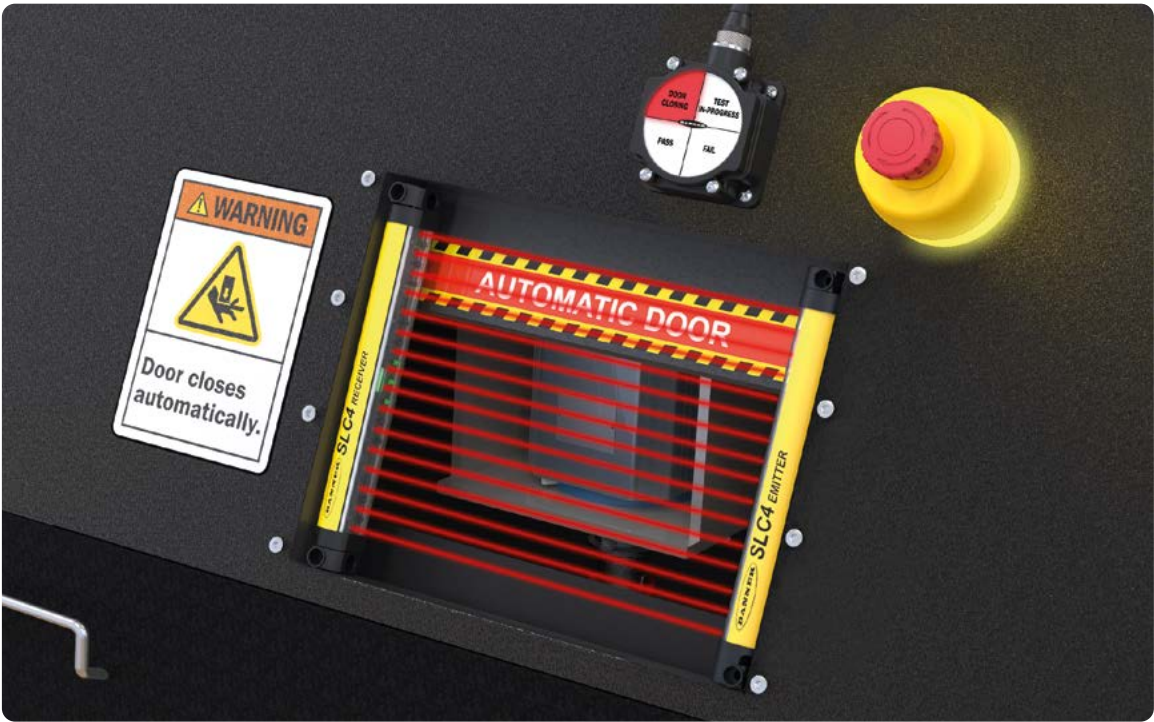

SLC4 are Type 4 safety light curtains specifically designed to safeguard smaller points of operation and access on compact machines.

# EZ-SCREEN LS2 Type 2 Light Curtains

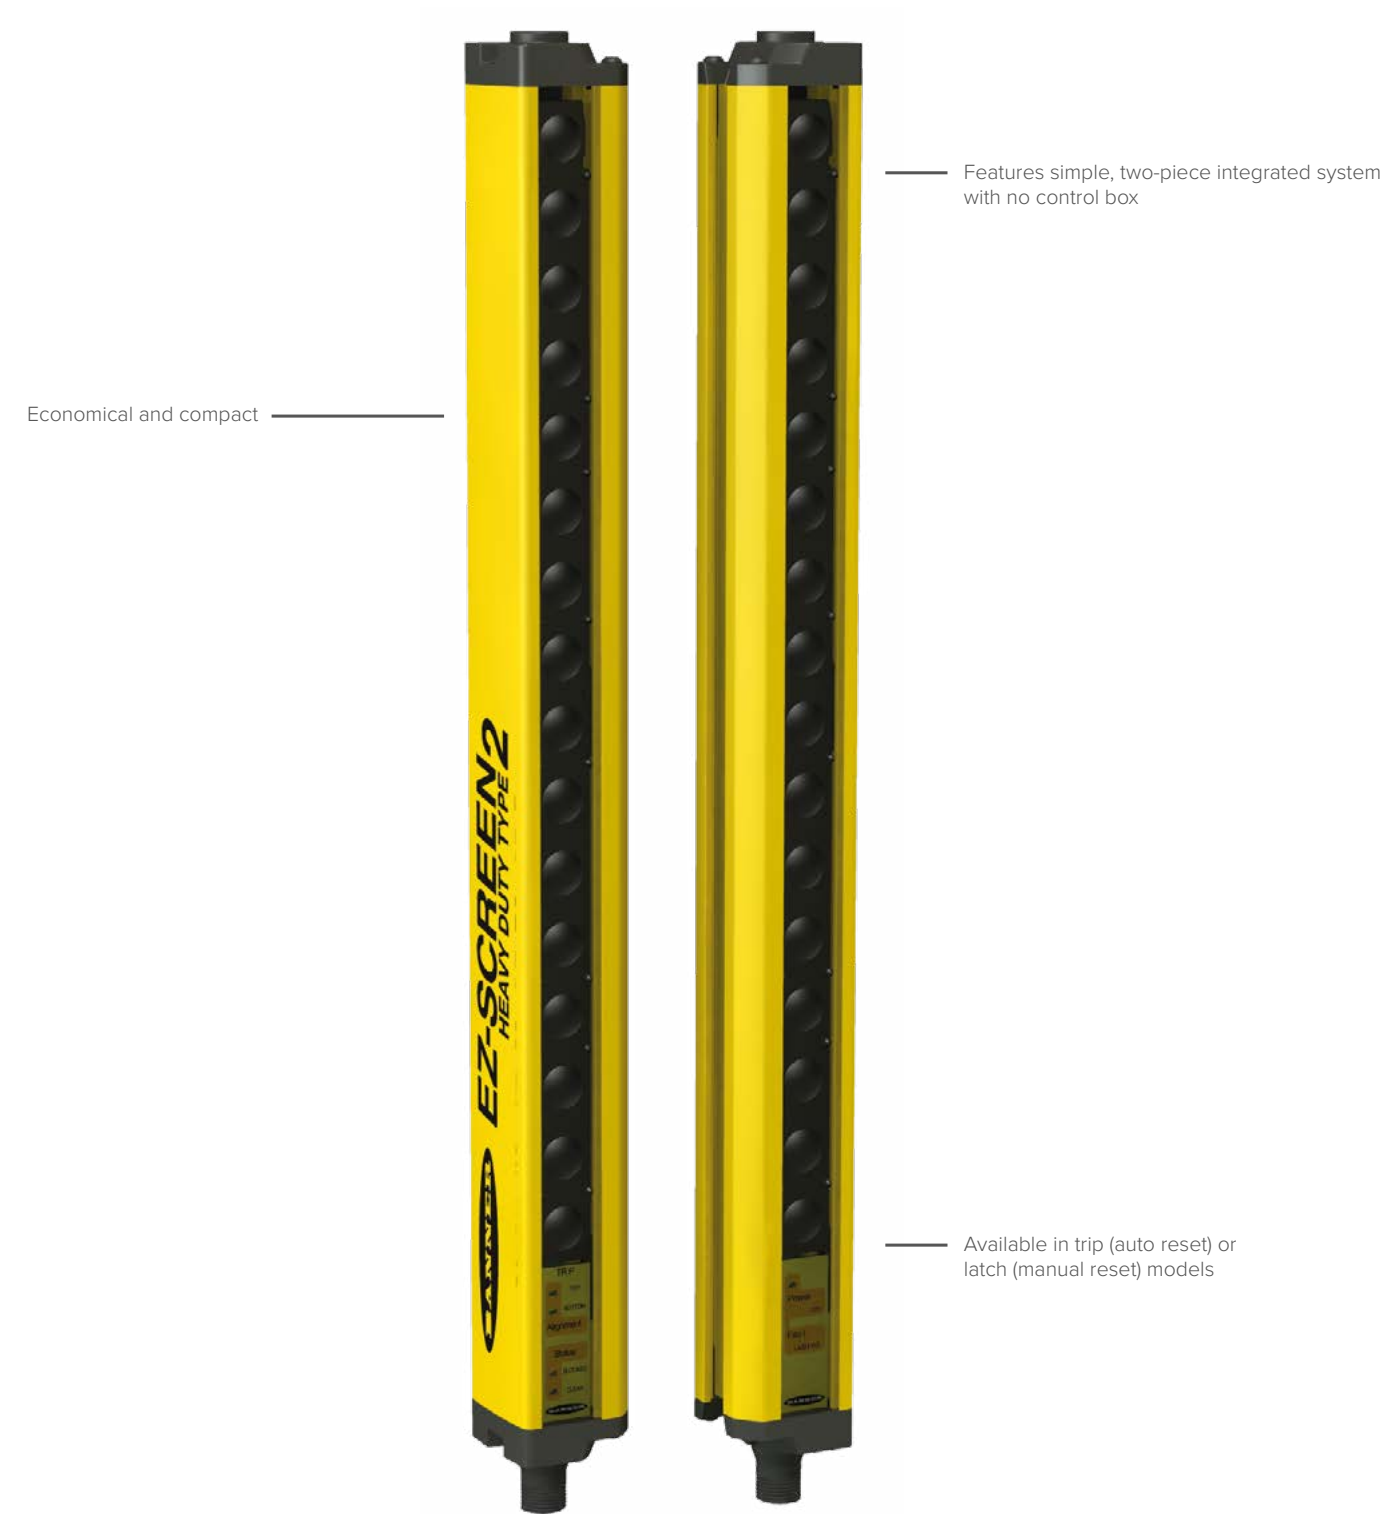



Designed for lower-risk applications such as bump or bruise, knock-down, trapping but not crushing, or minor cuts and abrasions.



## 1. Select Emitter and Receiver


Family	System Type	Resolution	Defined Area		Termination
LS2	TP	30	—	150	Q88
E = Emitter TR = Trip Receiver TP = Trip Pair LR = Latch Receiver LP = Latch Pair		30 = 30 mm	150 = 150 mm 300 = 300 mm 450 = 450 mm 600 = 600 mm 750 = 750 mm 900 = 900 mm	1050 = 1050 mm 1200 = 1200 mm 1350 = 1350 mm 1500 = 1500 mm 1650 = 1650 mm 1800 = 1800 mm	Q8 = 8-pin QD (individual Emitter or Receiver models) Q88 = For pair: Emitter with 8-pin M12 QD, Receiver with 8-pin M12 QD

## 2. Add Brackets

			
<b>USMB-5</b> <ul style="list-style-type: none"><li>Retrofit mounting bracket</li><li>2.3 mm thickness, black zinc-plated, chromate dip finish</li><li>Mounting hardware included: 1 kit required per emitter or receiver</li></ul>	<b>USMB-6</b> <ul style="list-style-type: none"><li>Universal mounting bracket kit</li><li>2.3 mm thickness, black zinc-plated, chromate dip finish</li><li>Mounting hardware included: 1 kit required per emitter or receiver</li></ul>	<b>USMB-8</b> <ul style="list-style-type: none"><li>Low profile mounting plate for 90° sensor direction</li><li>Black anodized aluminum</li><li>Uses two M4 screws (user supplied) for through-hole mounting</li><li>1 kit required per emitter or receiver</li></ul>	<b>8-Pin M12 with Flying Leads</b> <ul style="list-style-type: none"><li><b>QDE-815D</b> 4.5 m (15')</li><li><b>QDE-825D</b> 7.6 m (25')</li><li><b>QDE-850D</b> 15.2 m (50')</li></ul>



The Type 2 EZ-SCREEN safety light screen protects hands and fingers from being bumped, bruised, or pinched by the moving parts of a carousel.


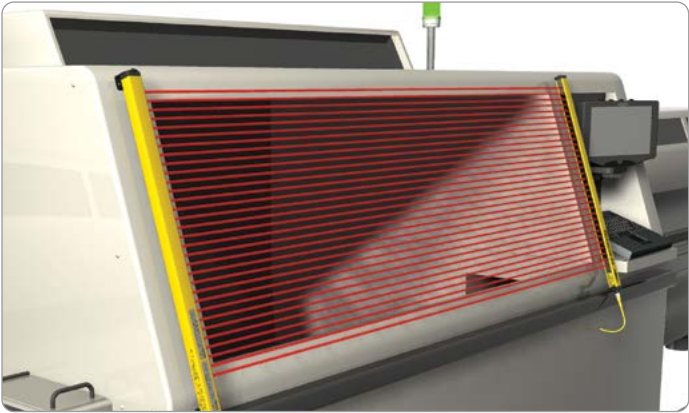


The Type 2 EZ-SCREEN safety light screen guards the opening to a chip shooter, which has moving parts that can cause painful but usually temporary injuries.



# SGS Type 4 Safety Light Grids

Two to four beam Type 4 safety light grids protect personnel from injury and machines from damage by guarding access, areas, and perimeters. Able to detect a body in a cost-effective and heavy-duty safety light curtain package.

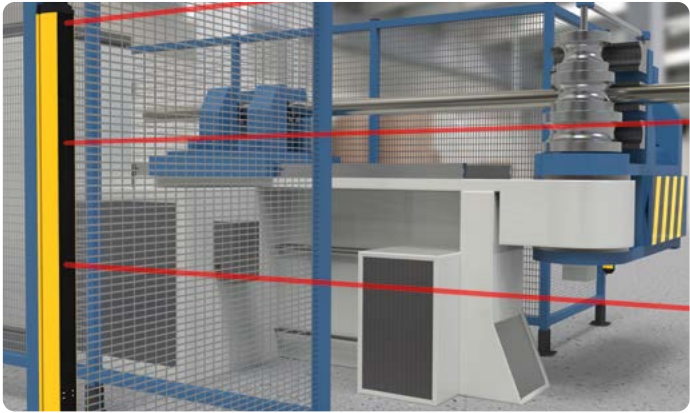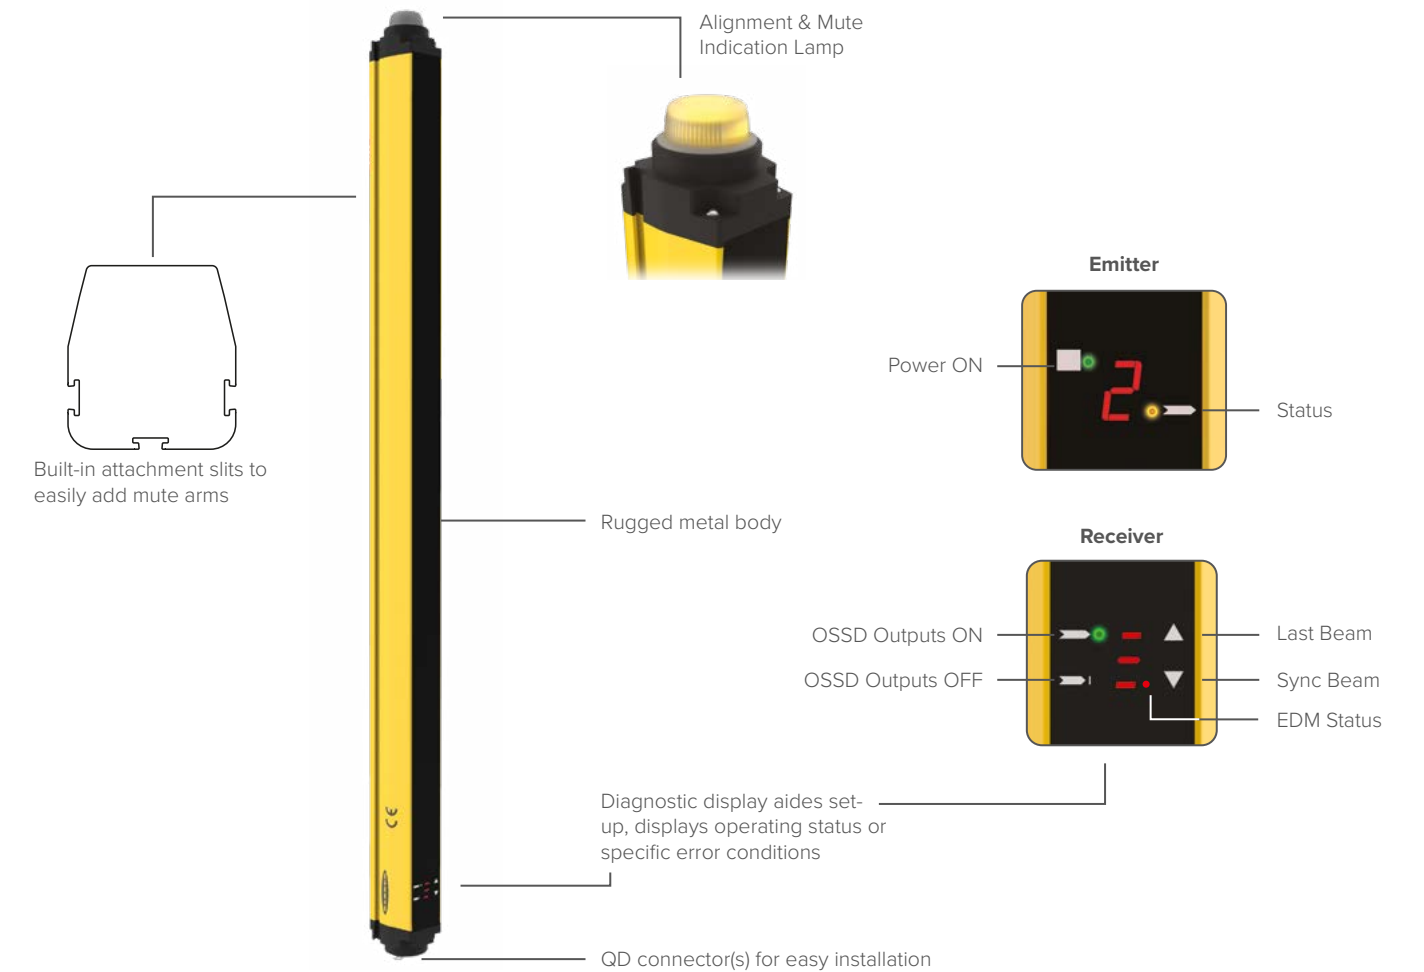

SGS Safety Grid Systems, with two, three, or four beams, are used to monitor the perimeter of the work area.



SGS Safety Grid Systems are available in Emitter/Receiver models capable of safeguarding over very long distances and in easy-to-deploy Active/Passive models.

## SGS Emitter/Reveiver

- When compared to higher resolution light screens, a lower cost option for body detection applications
- Available with integral muting
- Long range, up to 60 m

Type	Range (m)	Integral Muting	Protective Height (mm)	Models
Emitter & Receiver	6 to 60	No	500 (2 beams)	SGSXP2-500Q88
			800 (3 beams)	SGSXP3-400Q88
			900 (4 beams)	SGSXP4-300Q88
			1200 (4 beams)	SGSXP4-400Q88
	0.5 to 30	No	500 (2 beams)	SGSSP2-500Q88
			800 (3 beams)	SGSSP3-400Q88
			900 (4 beams)	SGSSP4-300Q88
			1200 (4 beams)	SGSSP4-400Q88
	0.5 to 30	Yes	500 (2 beams)	SGSMP2-500Q128
			800 (3 beams)	SGSMP3-400Q128
			900 (4 beams)	SGSMP4-300Q128
			1200 (4 beams)	SGSMP4-400Q128

## SGS Active/Passive

- Active transceiver contains emitter and receiver
- Reduces overall wiring costs
- Available with integral muting
- Up to 8 m range


Type	Range (m)	Integral Muting	Protective Height (mm)	Models
Active Transceiver	0.5 to 8	No	500 (2 beams)	<b>SGSSA2-500Q8</b>
			800 (3 beams)	<b>SGSSA3-400Q8</b>
			900 (4 beams)	<b>SGSSA4-300Q8</b>
			1200 (4 beams)	<b>SGSSA4-400Q8</b>
	0.5 to 8	Yes	500 (2 beams)	<b>SGSMA2-500Q12</b>
			800 (3 beams)	<b>SGSMA3-400Q12</b>
			900 (4 beams)	<b>SGSMA4-300Q12</b>
			1200 (4 beams)	<b>SGSMA4-400Q12</b>
Passive Mirror				
Type	Range (m)	Protective Height (mm)	Models	
Passive Mirror Assembly	Pair with Active Transceivers with matching beams and protective heights	500 (2 beams)	<b>SGSB2-500</b>	
		800 (3 beams)	<b>SGSB3-400</b>	
		900 (4 beams)	<b>SGSB4-300</b>	
		1200 (4 beams)	<b>SGSB4-400</b>	

Mute Arm Kits

Preassembled (with mounting hardware) for plug-and-play connection to the SGS grid and LS Safety Light Curtains

- Wiring connection block or cable accessories available
- Adjusts easily for line changes
- Hardware kit to attach mute arms to LS curtains, EZLSA-MCB-HW, ordered separately from mute arm kits

L-Configuration

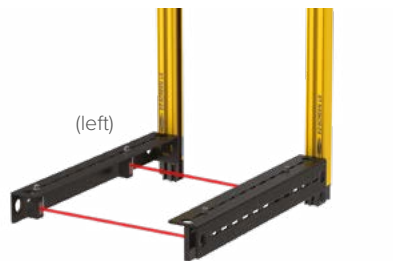

SGSA-ML-L-LPQ20

Includes 2 mute arms, 2 SGSA-Q20PLPQ5 mute sensors, and 2 retroreflectors

T-Configuration



SGSA-MT-LPQ20


Includes 4 mute arms, 4 SGSA-Q20PLPQ5 mute sensors, and 4 retroreflectors

X-Configuration



SGSA-MX-LPQ20

Includes 4 mute arms, 2 SGSA-Q20PLPQ5 mute sensors, and 2 retroreflectors



SGSA-ML-R-LPQ20

Includes 2 mute arms, 2 SGSA-Q20PLPQ5 mute sensors, and 2 retroreflectors



Integral muting models have muting technology built into the device eliminating the need for an external muting controller. Preassembled muting arm kits are available in T, L and X configurations. The muting kits use premounted hardware and Q20 retroreflective sensors and reflectors.

Benefits of Muting

- Maintain high safety standards while allowing for a predetermined object to break a beam
- Limit downtime by not unnecessarily shutting down a conveyor or robot cell

Applications

- Assembly and packaging machines
- Automated production equipment
- Robotic work cells
- Automated warehouses
- Palletizers

Mute Connection Options

Description	Models
Connection box for X, L or T mute arm kits	SGSA-MCB
Connection cable for X and L mute arm kits	SGSA-MCS-2
Connection cable for T mute arm kits	SGSA-MCS-4
Optional hardware kit for mounting mute connection box, or mute connection cable to the t-slot of SGS Receiver or Active Unit	SGSA-MCB-HW

Stands and Corner Mirrors



SGSA-S Series Enclosures					
Fits SGS Models	# of Windows	Enclosure Height	Distance from Floor to Bottom Window	Distance between Beams	Enclosure Models
SGS..4-300Q..	4	1543 mm (60.75")	300 mm (11.8")	300 mm (11.8")	SGSA4-S300 SGSA4-S300-M
SGS..3-400Q..	3	1238 mm (48.78")	300 mm (11.8")	400 mm (15.8")	SGSA3-S400 SGSA3-S400-M
SGS..4-400Q..	4	1618 mm (63.69")	300 mm (11.8")	400 mm (15.8")	SGSA4-S400 SGSA4-S400-M
SGS..2-500Q..	2	1035 mm (40.75")	400 mm (15.8")	500 mm (19.7")	SGSA2-S500 SGSA2-S500-M



SSM Series Corner Mirrors				
Fits SGS Models	Reflective Area	Mounting Area	Mirror Height	Mirror Models
SGS..2-500..	550 mm (21.7")	661 mm (26.0")	628 mm (24.7")	SSM-550
SGS..3-400..	825 mm (32.5")	936 mm (36.9")	903 mm (35.6")	SSM-825
SGS..4-300..	975 mm (38.4")	1086 mm (42.8")	1053 mm (41.5")	SSM-975
SGS..4-400..	1275 mm (50.2")	1386 mm (54.6")	1353 mm (53.3")	SSM-1275



MSA Series Stands		
Pole Height	Usable Stand Height	Stand Models
1676 mm (66")	1550 mm (61")	MSA-S66-1
2134 mm (84")	2007 mm (79")	MSA-A84-1
2667 mm (105")	2667 mm (100")	MSA-S105-1

Cables



8-Pin M12 with Flying Leads

QDE-815D  
4.5 m (15')  
QDE-825D  
7.6 m (25')  
QDE-850D  
15.2 m (50')



12-Pin M12 with Flying Leads

QDE-1215E  
4.5 m (15')  
QDE-1225E  
7.6 m (25')  
QDE-1250E  
15.2 m (50')


Brackets








SA-MBK-10-4  
End-mount bracket

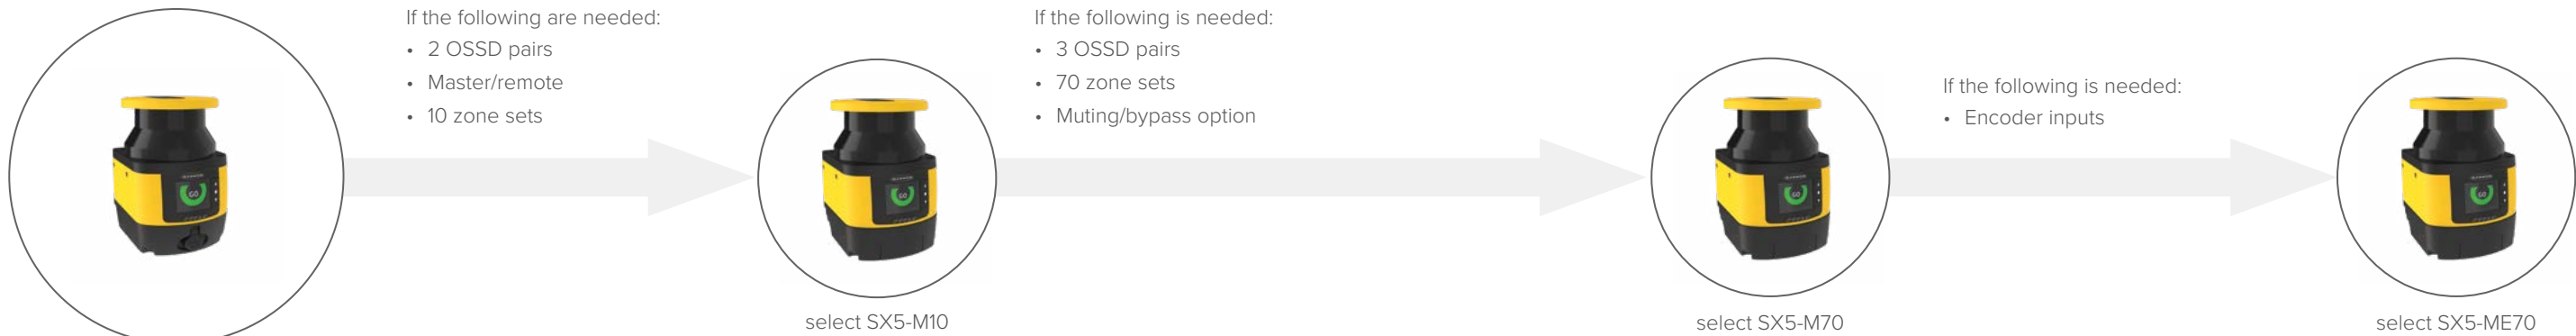






# Choosing a Banner Safety Scanner



					
	SX5-B6	SX5-M10	SX5-M70	SX5-ME70	SX5-R
Description	Stand Alone	Master	Master	Master	Remote
OSSD Pairs	1	2	3	3	
Removable Memory		✓	✓	✓	✓
Replaceable Window	✓	✓	✓	✓	✓
Zone Sets	6	10	70	70	Master

# Safety Scanner Selection Guide


														
SX5-B6			SX5-M10			SX5-M70			SX5-ME70			SX5-R		
p. 36			p. 36			p. 36			p. 36			p. 36		
Dimensions W x D x H (mm)			102 x 112 x 152			102 x 112 x 152			102 x 112 x 152			102 x 112 x 152		
Presence Detection			50/70 mm			50/70 mm			50/70 mm			50/70 mm		
Body Detection			70/150 mm			70/150 mm			70/150 mm			70/150 mm		
Hand Detection			30/40 mm			30/40 mm			30/40 mm			30/40 mm		
Range (depending on resolution)			30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m			30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m			30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m			30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m		
Max. Zone Sets (depending on configuration)			6			70			70			depending on master		
Master Remote			Master (up to 3 remotes)			Master (up to 3 remotes)			Master (up to 3 remotes)			Remote		
Removable Memory			SXA-RM-10			SXA-RM-70			SXA-RM-70					
Speed Monitoring									✓					
Max. OSSD Outputs (depending on configuration)			1x 2 OSSD			3x 2 OSSD			3x 2 OSSD					
Inter Device Connection			8-Pin M12			8-Pin M12			8-Pin M12			8-Pin M12		
Integral Muting			✓			✓			✓			✓		
Programmable Dust Filter			✓			✓			✓			✓		
Measurement Data			✓			✓			✓			✓		
Field-replaceable Window			✓			✓			✓			✓		



# Safety Scanner System

Horizontal or vertical monitoring of both personnel and stationary or mobile systems

SX Series safety laser scanners protect personnel, equipment, and mobile systems by continuously scanning a user-defined area of up to 275° to create a two-dimensional protected zone.

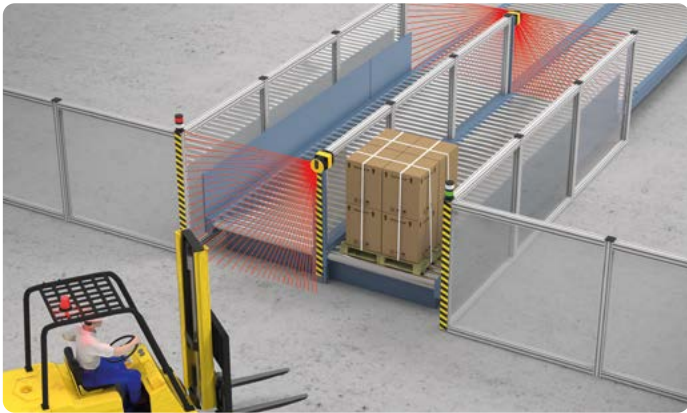

SX5 software configuration allows zone switching for full, right-side and left-side safety protection during this forklift access application.




Software interface makes it easy to create custom safety and warning zones to safeguard large, complex, and irregularly shaped areas.

Increased Machine Uptime


The SX5 has on-board LED indicators and a large multi-segment color display that provide at-a-glance system status information so users can quickly identify zone breaches and resolve issues with a minimal amount of equipment downtime.



Compact, one-piece safety device installs easily above and away from area hazards without requiring time-consuming alterations to area infrastructure.

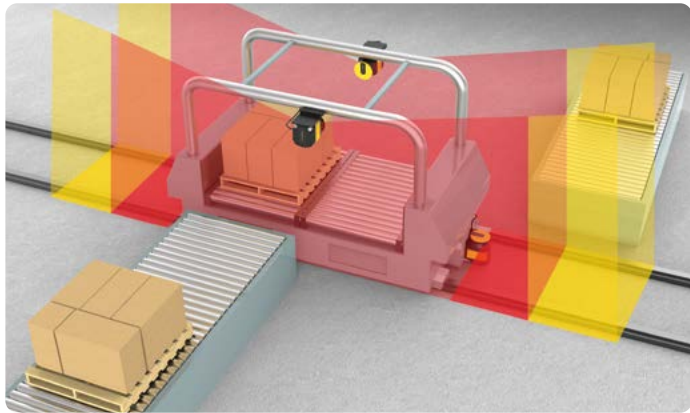


An alert is triggered if an object enters the warning zone and equipment will come to a stop if the safety zone is breached.

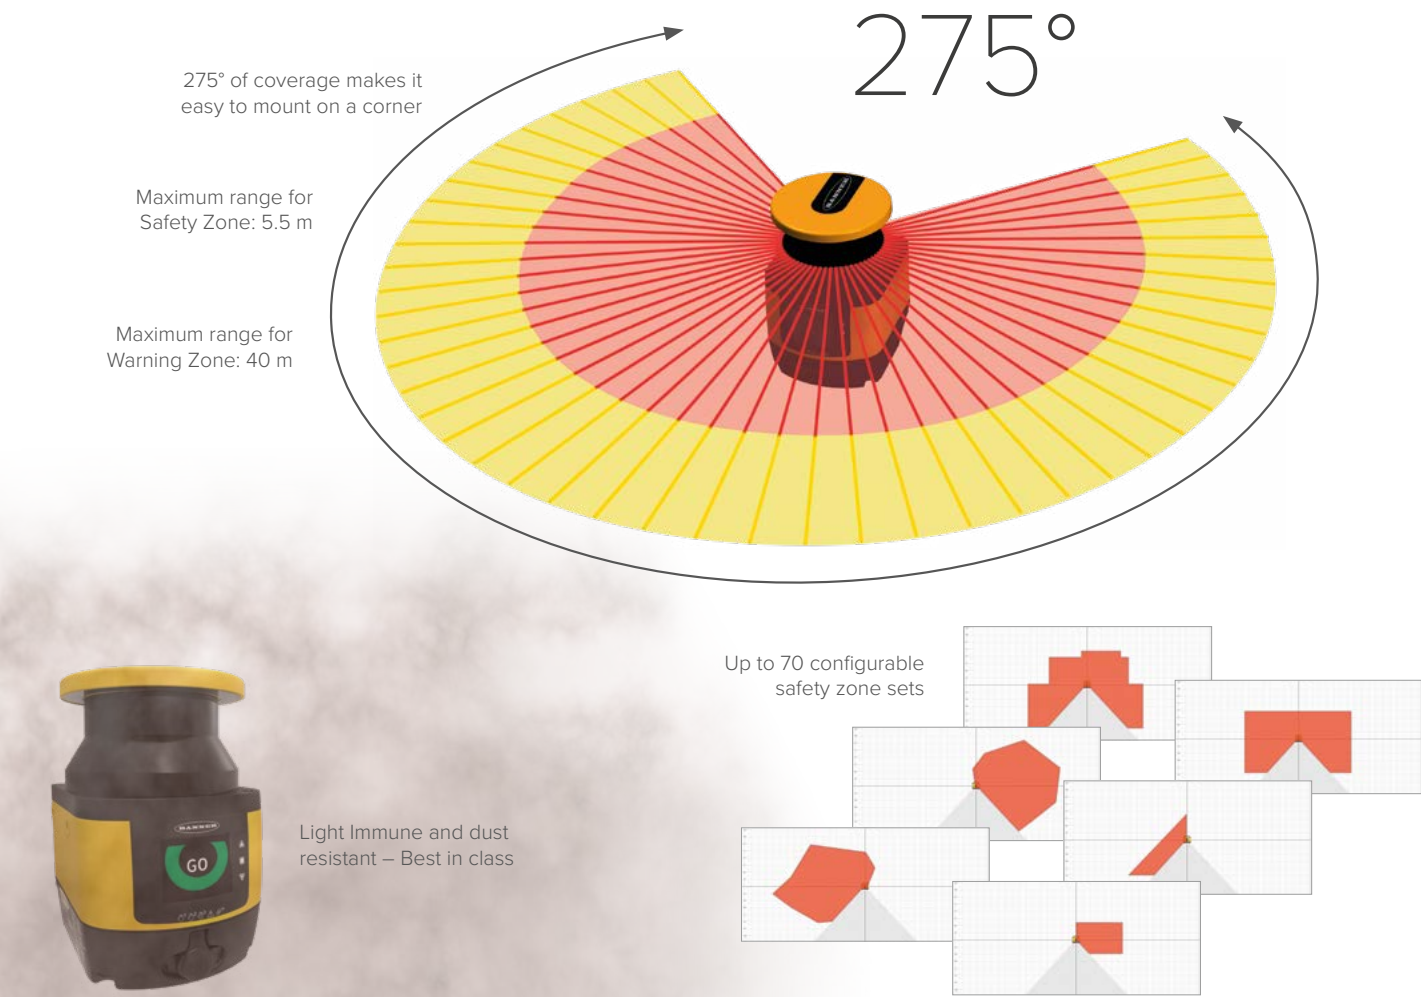

# Safety Scanner System

## Removable memory for fast scanner replacement


The system configuration is backed up in a removable memory unit. Install your replacement scanner fast and easy, without needing to reconfigure your system. The machine interface cables attach to this memory unit on the Master models.

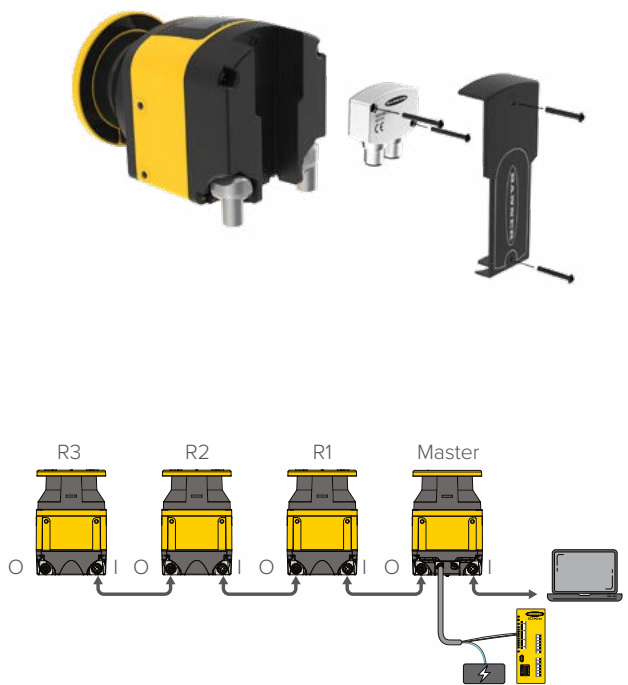

## Master and Remote connection reduces wiring

For applications that require monitoring multiple sides of an AGV, up to four scanners can be easily connected through an Ethernet-based safe communications bus, working as a single system.


Each remote unit is connected to the master by a single cable that provides them with power, and the memory of the entire system is stored in the master.

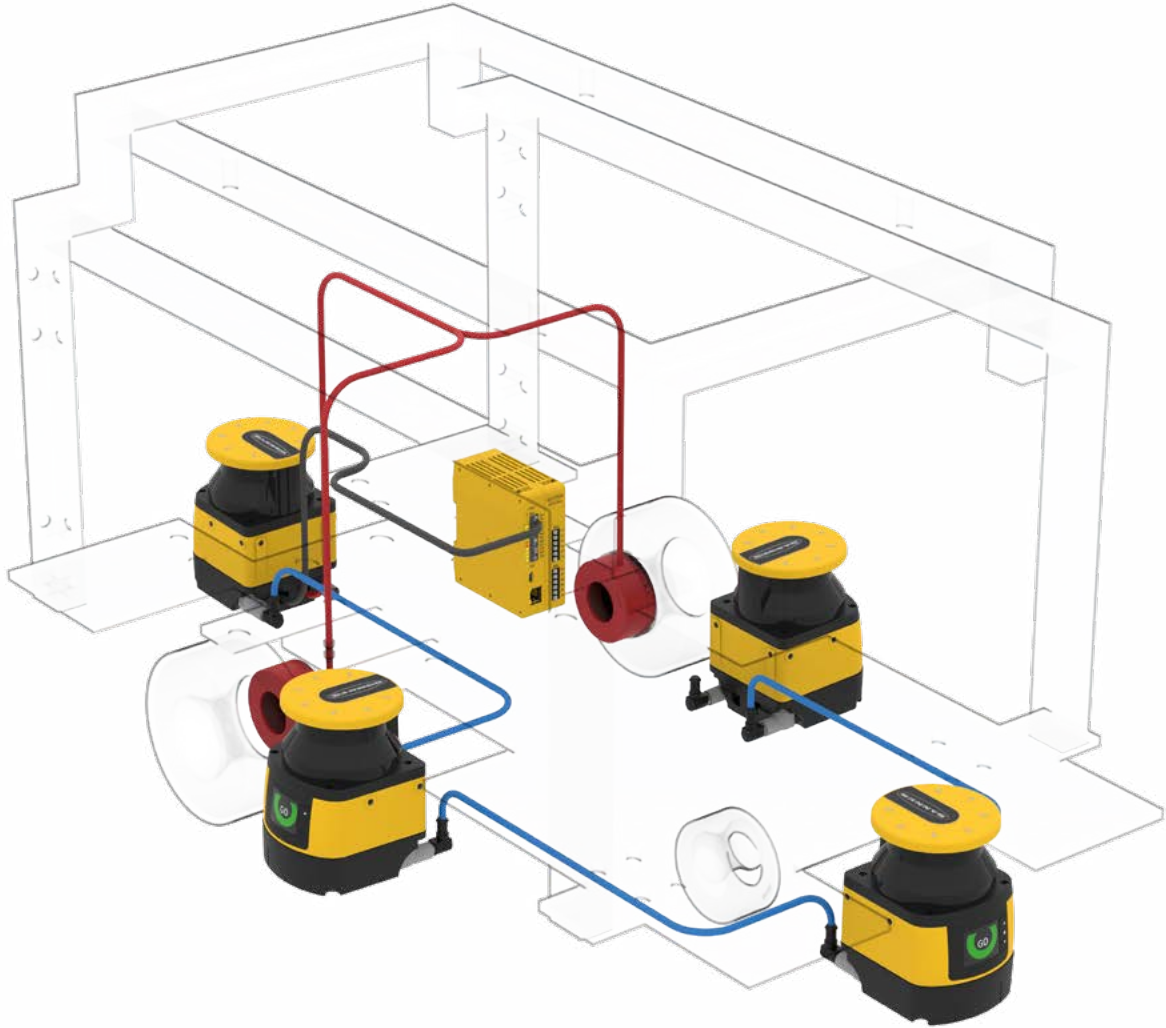

# Safety Scanner Software

## Simple setup for rapid deployment

The SX5 can be set up in just a few simple steps using Banner's free configuration software. This robust software features menu-driven tools that guide users through setup and make it easy to design custom safety and warning zones to accommodate existing infrastructure and meet the specific needs of any application.

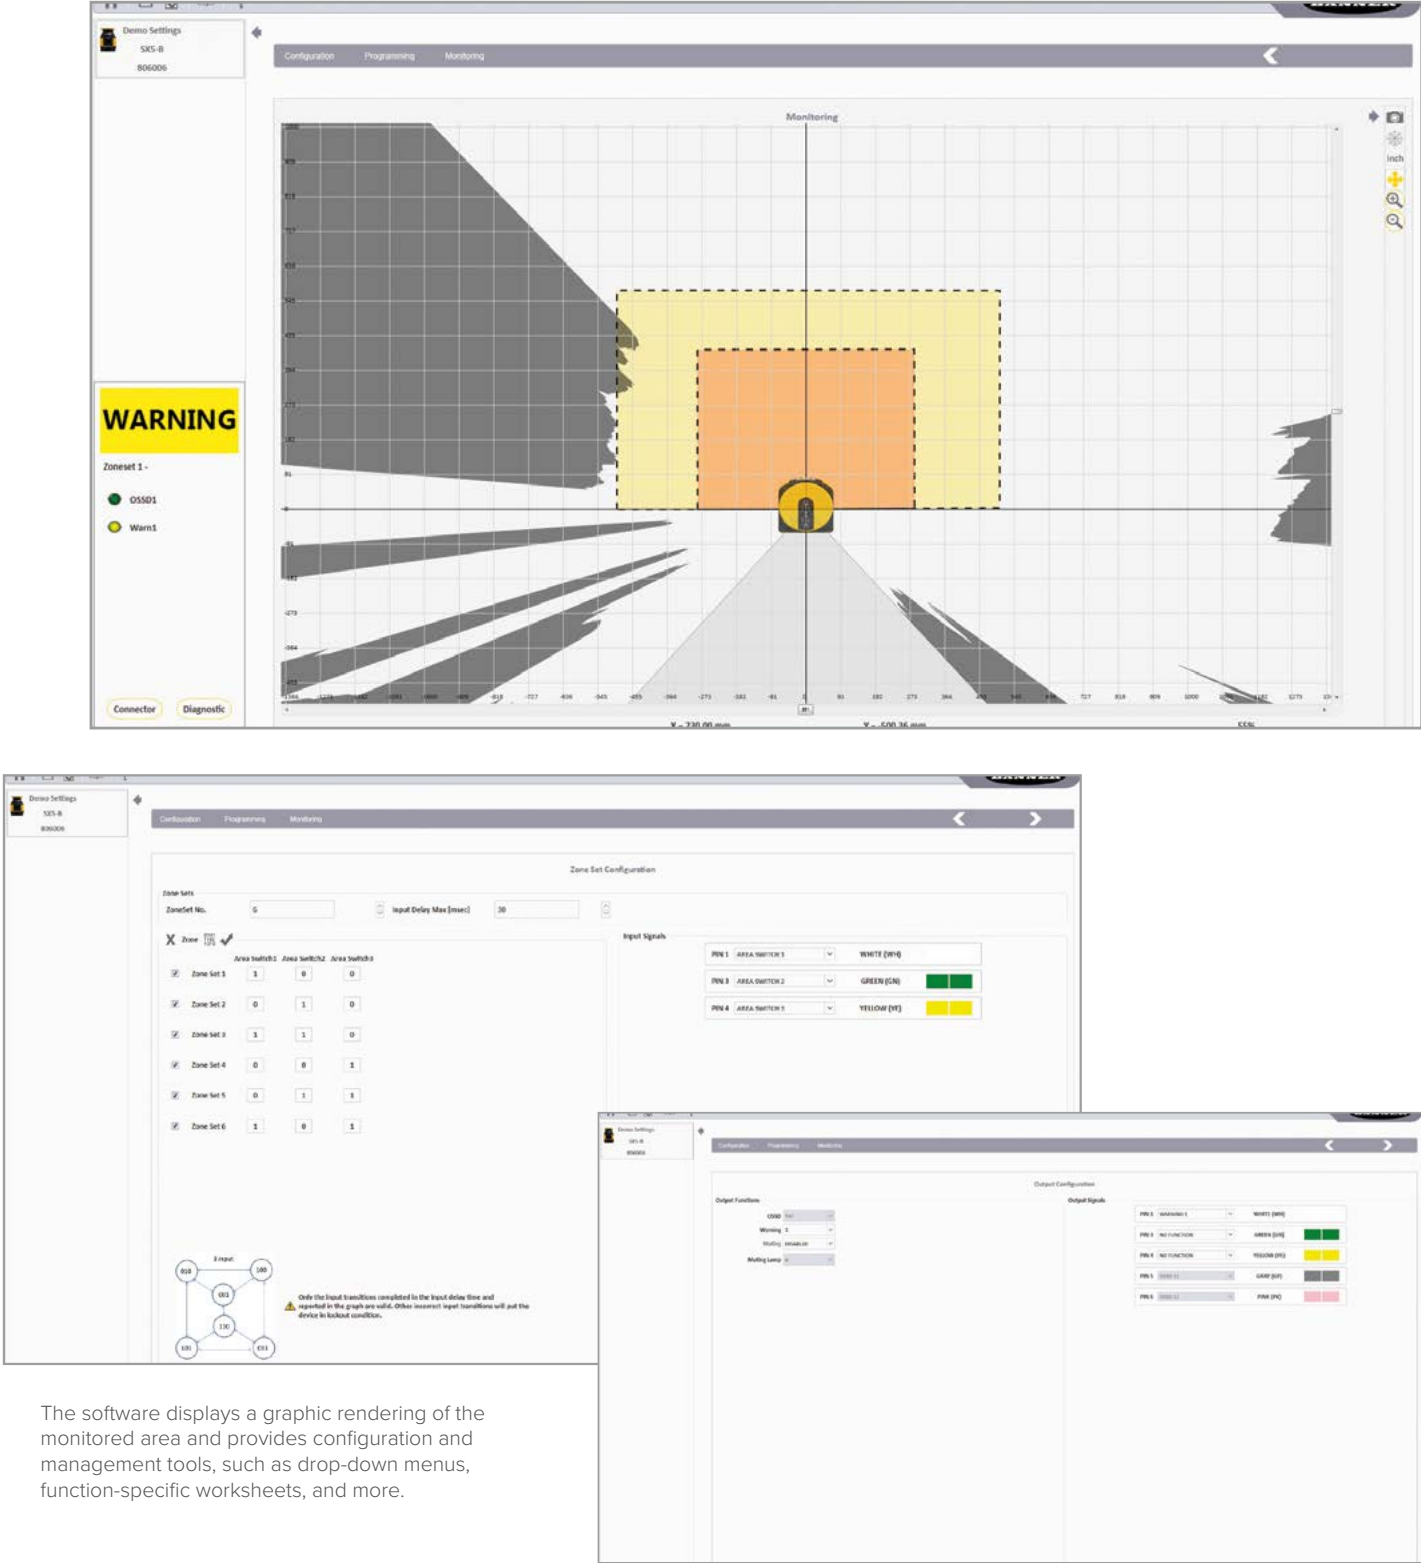


The software displays a graphic rendering of the monitored area and provides configuration and management tools, such as drop-down menus, function-specific worksheets, and more.



# Safety Scanner Fixed Applications

## Stationary area guarding

Stationary area guarding uses sensing fields such as safety or warning zones to continually sense an individual within a safeguarded area. Stationary area guarding can reduce or eliminate the possibility of a pass-through hazard that could result in an individual being exposed to unexpected machine startup or motion.

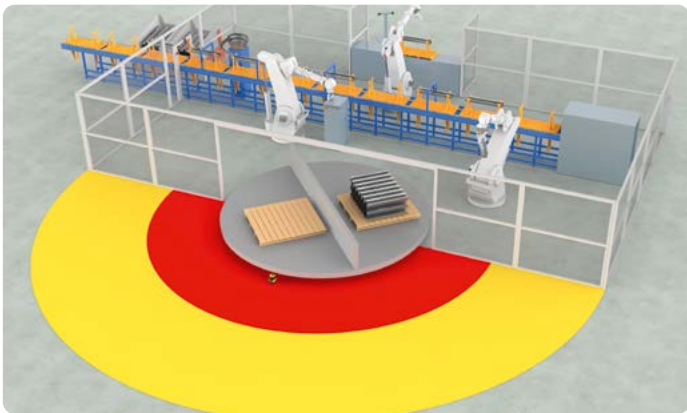

## Single-zone safeguarding

The safety scanner detects when a person approaches a hazard. When the person enters a warning zone, the hazardous motion is controlled safely. When the person enters the safety zone, the hazard is stopped.




## Multi-zone safeguarding

Up to three safety zones can be monitored simultaneously and independently. This way, safety in the entire plant is optimized, ensuring increased productivity and improved ergonomics in the entire plant.



## Multi-zone safeguarding via master-remote

Manage multiple areas with master-remote architecture. Multiple safety zones stop different parts of the dangerous machine, without the need of an external controller.

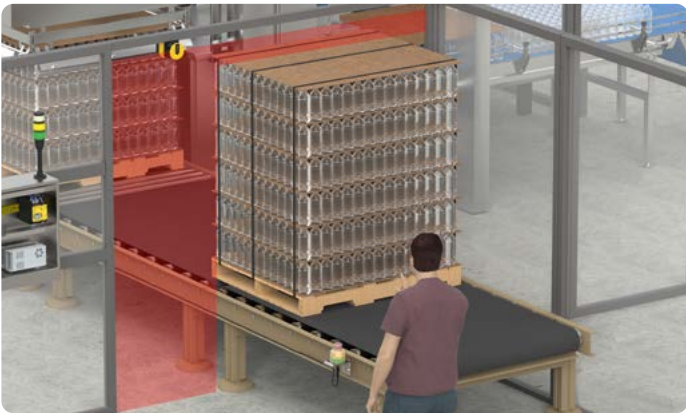


## Safeguarding with dynamic and partial muting

Muting sensors can be directly connected to the SX5, creating a tightly protected area around the muted object while muting is active. Each safety output can be configured with its own muting requirements.

# Safety Scanner Mobile Applications


## Mobile area guarding

On mobile applications, the SX5 monitors the area directly ahead of the vehicle using both the warning and the safety zones. The vehicle slows down if something is detected in the warning zone and the vehicle stops when something is detected in the safety zone. If the speed increases or decreases, alternate zone sets can be used to adjust for varying stopping distances.

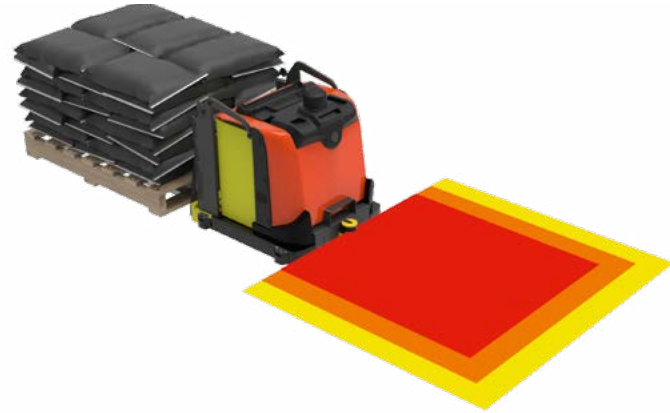


## Automated guided vehicle collision avoidance

Warning and safety zones can be used to alert operators, slow down the vehicle, or stop it. Up to 70 different zones can be set and activated per position, speed and movement of the vehicle.

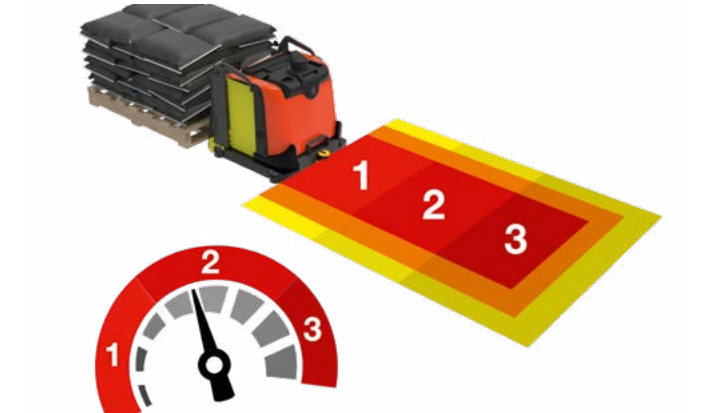


## Safe speed monitoring

Incremental encoders inputs can be directly read by the SX5 scanner in order to select the appropriate slow-down and stopping areas, based on the speed of the vehicle.

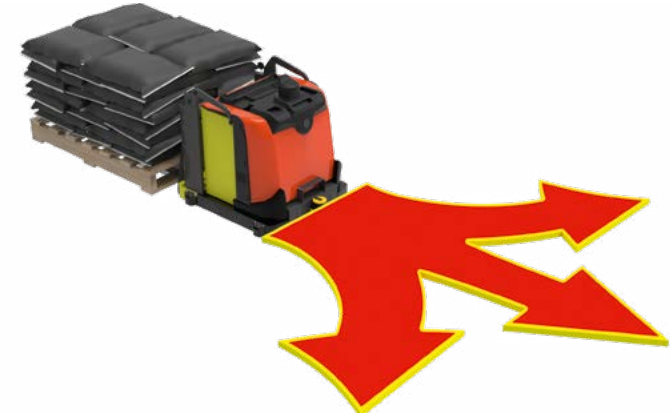

## Advanced measurement data for direct navigation


The SX5 has a direct transmission protocol over Ethernet. It can be used to read measurement data for vehicle navigation. Data includes active zone, I/O status, measured speed, intensity of beams, and diagnostic.

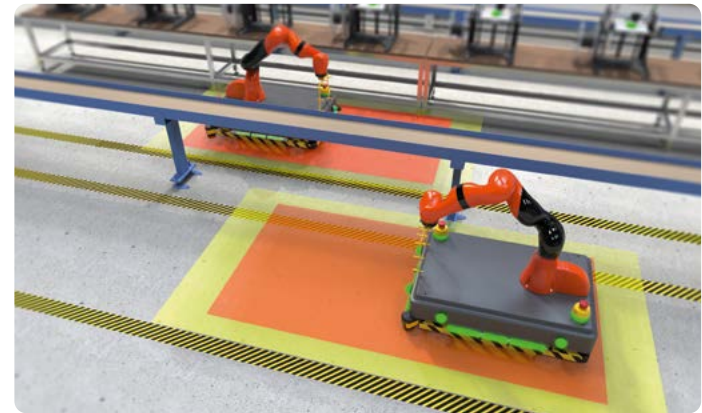

## Collaborative robot monitoring





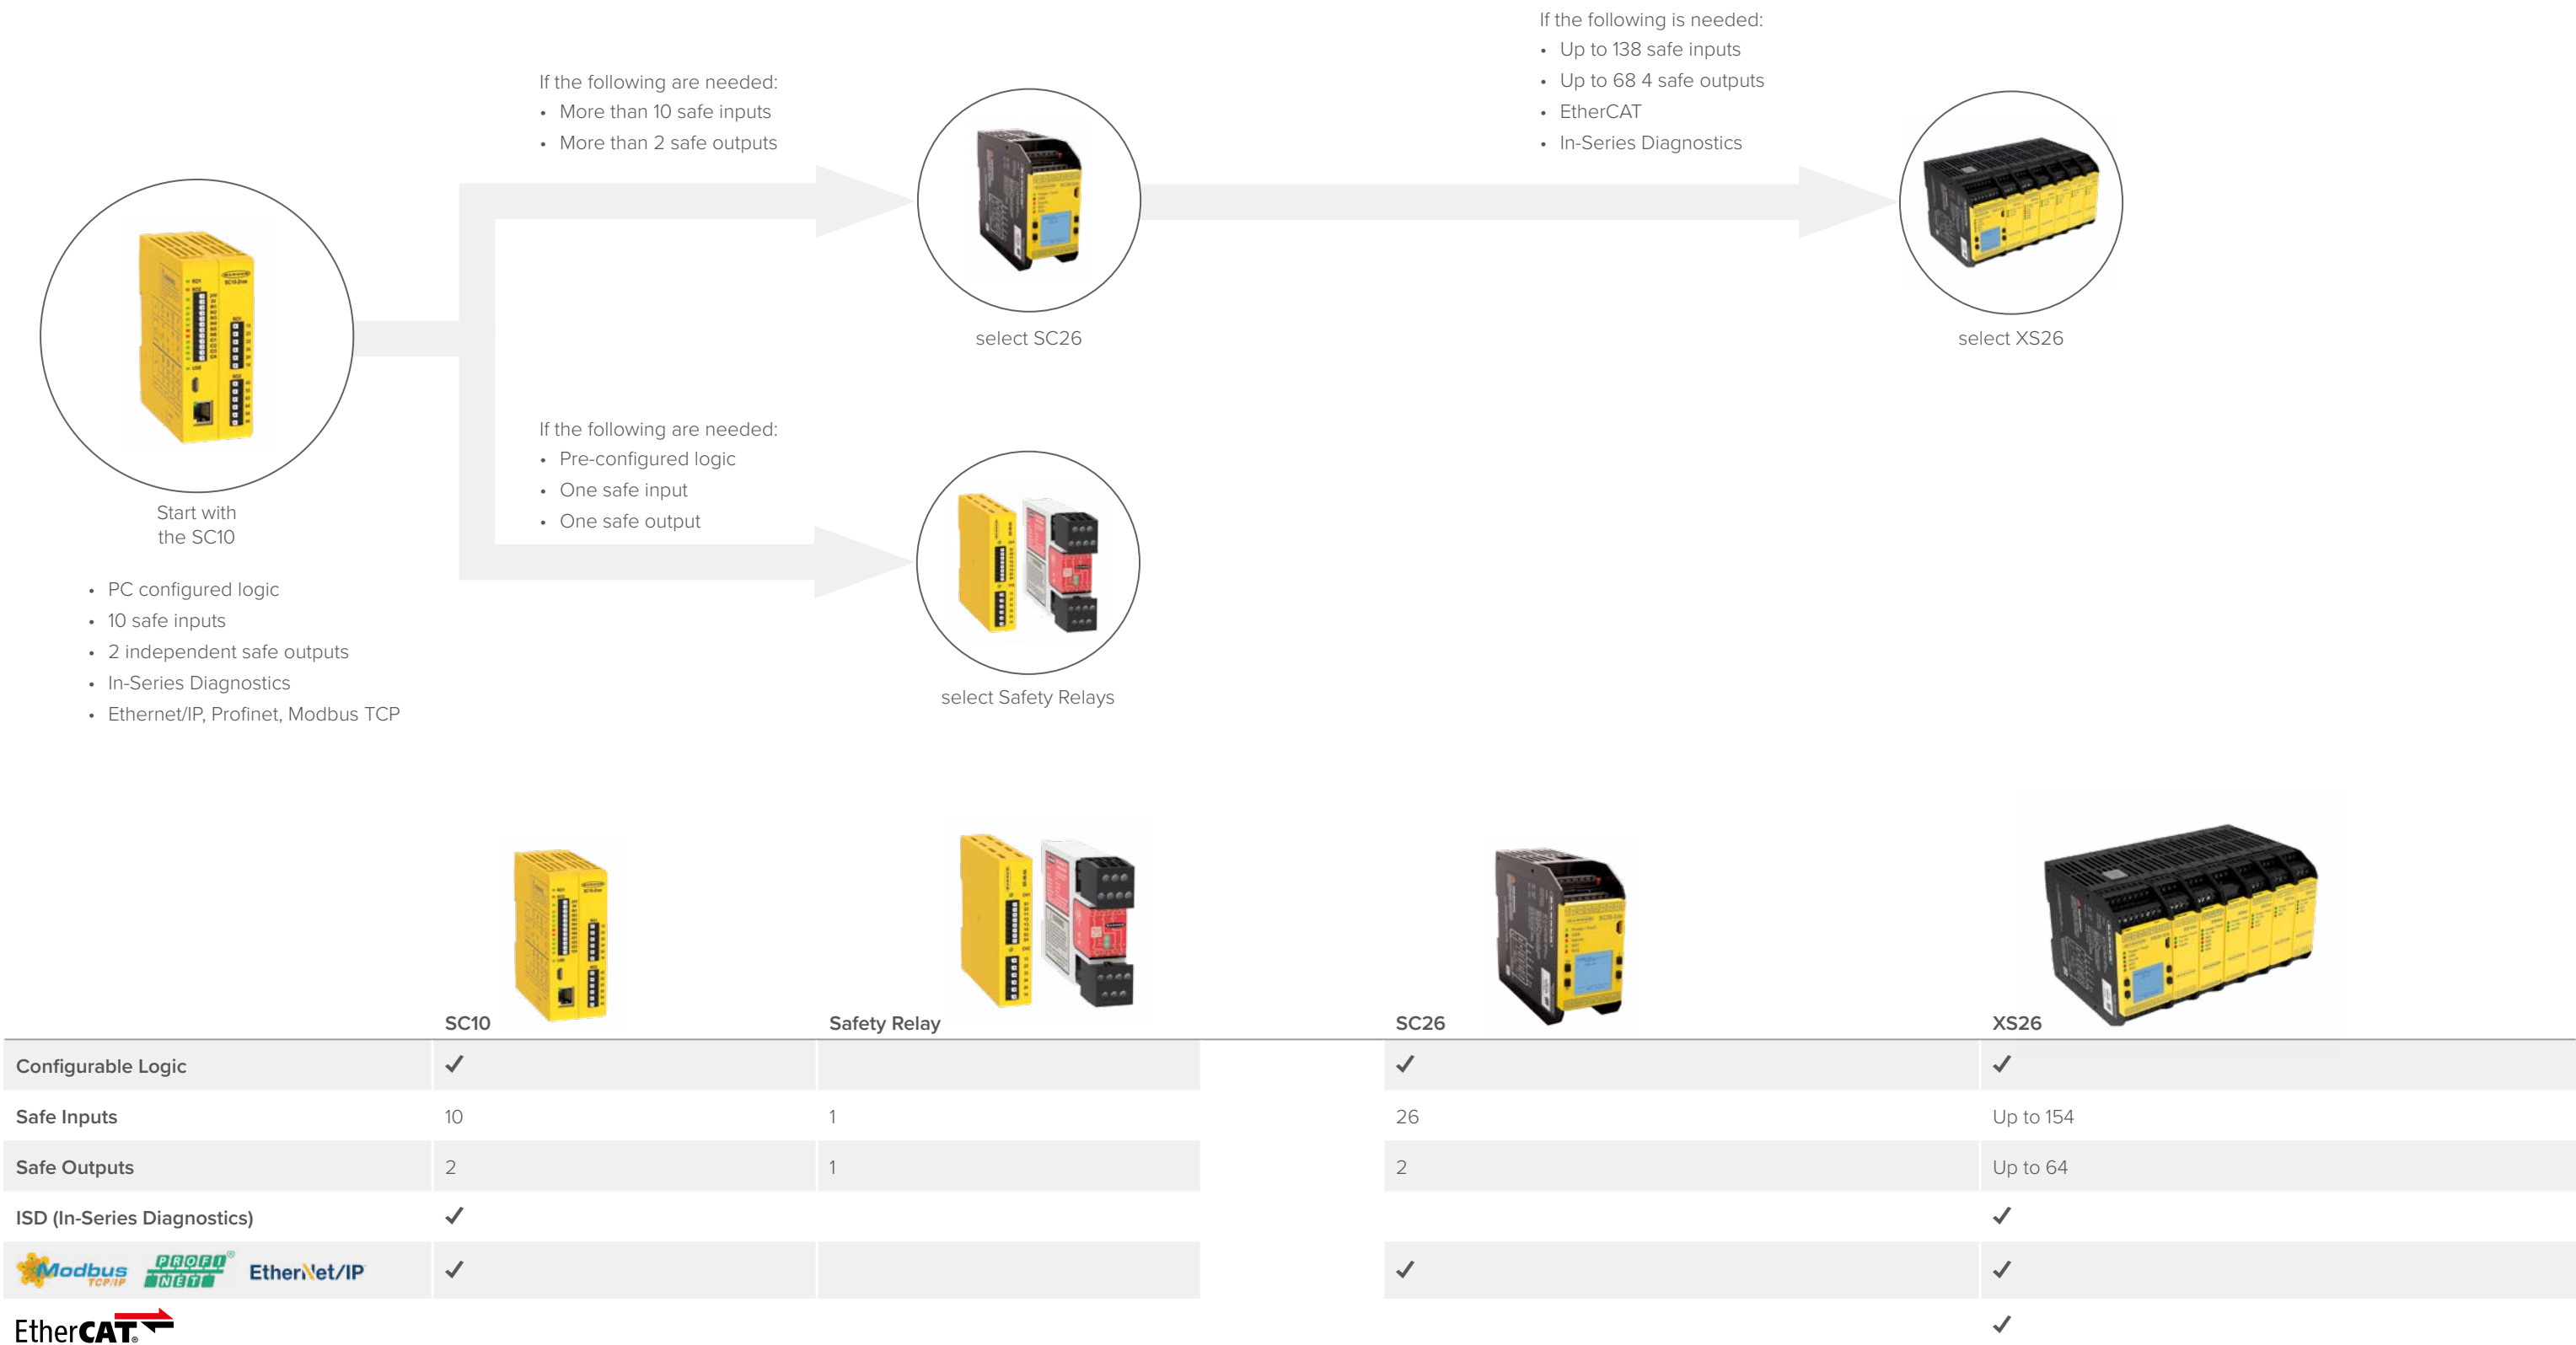










Mobile collaborative robots (cobots) have built-in safety features that enable them to work alongside humans. Cobots can be programmed to slow down or stop when a human enters the warning or safety zone.

# Choosing a Banner Relay and Controller





# Relay and Controller Selection Guide

	 GM/ES	 UM	 SM	 AT	 MMD		 SSM	 SR	 IM	 EM		 SC10	 SC26/XS26
	p. 46	p. 46	p. 46	p. 46	p. 46		p. 46	p. 46	p. 46	p. 46		p. 48	p. 48
Device Type	Preconfigured Safety Relay Modules						Preconfigured Safety Relay Modules					Configurable Controllers	
Self Testing Safety Device		✓			✓							✓	✓
Self Testing Safety Device with EDM Function		✓			✓			✓	✓			✓	✓
E-Stop	✓	✓			✓ (secondary function)							✓	✓
Rope Pull	✓	✓			✓ (secondary function)							✓	✓
Gate Switch (potential free contacts)	✓	✓			✓							✓	✓
RFID Gate Switch (OSSD contacts)		✓			✓							✓	✓
ISD Functionality												2 chains	8 chains
  												✓	✓
													✓
Safety Mat Monitoring			✓									✓	✓
Two-Hand Control				✓								✓	✓
Enabling Device	✓	✓										✓	✓
Expandable										✓			✓
Muting					✓							✓	✓
ON/OFF Delay										OFF delay available		✓	✓
Speed Monitoring							✓						
Safety Standard	Cat. 4 PL e, per EN ISO 13849-1; SIL 3 per IEC 61508 and IEC 62061						Cat. 4 PL e, per EN ISO 13849-1; SIL 3 per IEC 61508 and IEC 62061						
Inputs	1 NC and 1 NO (single or dual) 1 NC (single) 2 NC (dual)	1 NC (single) or 2 NC (dual) or 2 PNP	1 (or multiple in series) 4-wire safety mat	2 STB or buttons with complementary contacts	2 NC mutable (dual) and 2 NC SSI (dual)		2 PNP	2 NC (dual) or 2 PNP	2 NC (dual) or 2 PNP	1 NC (single) or 2 NC (dual)		10	SC26: up to 26 XS26: up to 154
Safety Outputs	2 NO, 3 NO, 4 NO	2 NO or 3 NO	4 NO	2 NO	2 PNP OSSD or 2 NO		2 NO	2 NO, 3 NO	2 NO, 3 NO	4 NO or 4 NO with delay		2x 3 NO	SC: 2 XS: up to 68
Maximum Safety Output Rating	6A, 7A	7A	6A	6A	6A		4A	6A	6A	6A		6A each	0.5A each
Auxiliary Outputs	1 NC or 1 NC and 2 PNP	1 NC, depending on model	1 NC and 2 PNP		1 PNP or 1 NC		1 NC	1 NC	1 NC, depending on model			depends on configuration	depends on configuration
Power Supply	24 V AC/DC 115 V AC and 12-24 V DC or 230 V AC and 12-24 V DC	24 V AC/DC	115 V AC and 12-24 V DC or 230 V AC and 12-24 V DC	24 V AC/DC	24 V DC		24 V DC	24 V DC	24 V DC	24 V DC or 24 V AC/DC, depending on model		24 V DC	24 V DC


# Safety Relays and Controllers



Industrial safety controllers and relays provide an interface between safety devices and the machines and processes those devices monitor for a complete and easy-to-use safety control solution.



Safety controllers can be tailored for a wide variety of machines, including machines with multiple processes.

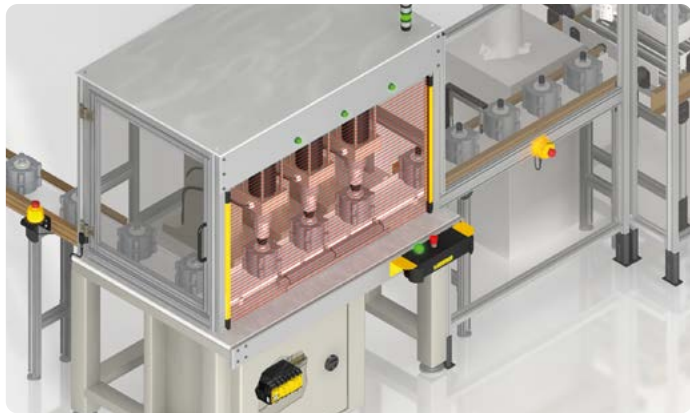

Configurable controllers monitor multiple safety devices, such as E-stop buttons, safety switches, safety light screens, two-hand controls, and rope pull switches.

## Safety Relays



- Cost-effective for simple safety circuits
- Preset functionality: Configuration not required
  - Safety inputs: 1
  - Independently controlled safety outputs: 1; 4 to 7A
  - Choose from a variety of models:
    - Universal input safety relays
    - E-stop monitoring safety relays
    - Muting safety relays
    - Safe speed monitoring relays
    - Safety mat relays
    - Safety extension relays
    - Interface relays

## Hybrid Safety Controller Plus 2 Safety Relays






- Flexible and cost-effective solution for machines typically using 2 safety relays
- PC configurable: Flexible and easy-to-use
  - Safety inputs: up to 10; up to 70 with ISD
  - Independently controlled safety outputs: 2; 6A each
  - Convertible safety inputs: 4
  - Terminal LEDs for easy troubleshooting
  - Industrial Ethernet
  - Each output contains 3 NO redundant safety contacts

## Expandable Safety Controller



- Expandable for complex safety applications where 3 or more safety relays are typically used
- PC configurable: flexible and easy-to-use
  - Safety inputs: 26 (base unit) up to 154
  - Independently controlled safety outputs: up to 68; 0.5A to 6A each
  - Convertible safety inputs: 8 (Base Unit) up to 40
  - LCD screen for easy troubleshooting
  - Industrial Ethernet

Connect safety devices easily to the safety controller

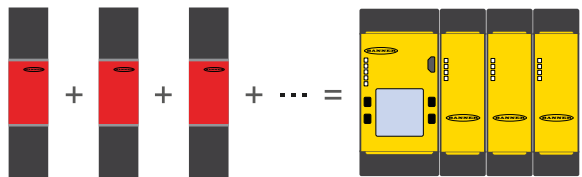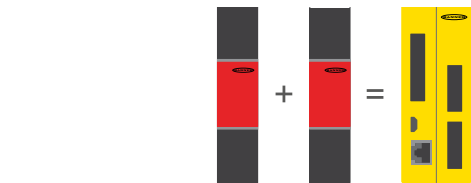




# Safety Controllers

## XS26 Expandable Safety Controller

26 to 154  
Safety Inputs



Safety Outputs  
Safety Zones: 2 to 4

- 6A Relay 2 NO
- 0.5A Solid State


Optional display screen allows local diagnostics for efficient troubleshooting

Up to eight expansion I/O modules can be added as automation requirements grow or change

Choose from six expansion module models with a variety of safety inputs, solid-state safety outputs and safety relay outputs


Controller and input modules allow safety inputs to be converted to status outputs for efficient terminal use

Industrial Ethernet



## SC10 Safety Controller

10 Safety Inputs




Safety Outputs  
Safety Zone 1: 6A Relay 3 NO

Safety Zone 2: 6A Relay 3 NO


- 10 safety inputs
- 4 safety inputs allowed to be converted to status outputs for efficient terminal use
- 2 redundant safety outputs
- LED indication next to each output
- Industrial Ethernet two-way communication
- Programmable via USB connection
- In-Series Diagnostic capable


Industrial Ethernet



## Easy to Configure and Integrate with a PLC

Store SC-XM3 memory card directly on controller





SC-XM3 Fast Programming and Swapout


- Backup copy of configuration, password, network settings
- Download configuration without a PC
- Save time during panel build
- Fast swapout minimizes downtime

Free Software

Intuitive PLC Integration

# In-Series Diagnostics Functionality

In-Series Diagnostics allows you to connect up to 32 devices with one in-series connection and communicate directly with the most commonly used PLCs. Achieves up to CAT4, SIL3, PLe safety rating.

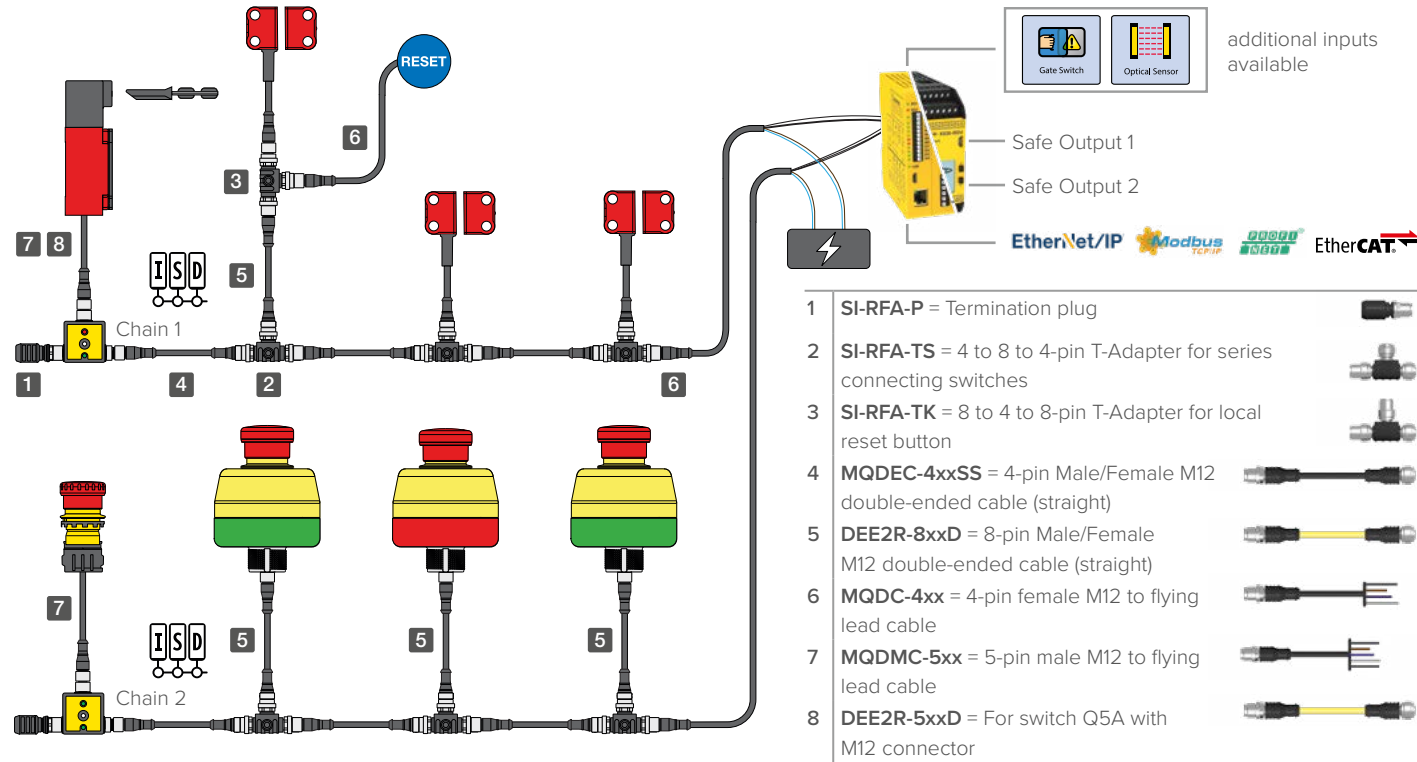

## Compatible Devices

Family

SI-RF

System Type

D

Reset

T

Coding

U

Connection

P8

RFID Safety Door Switch

D = Cascade with (ISD)

T = Automatic (Trip)  
L = Manual (Latch)

L = Low  
H = High  
U = Unique

P8 = 250 mm 8-pin M12 pigtail QD

Family

SSA-EB1PL

Color Armed

Y

Color Pressed

R

Options

Blank

Outputs

OD

Enclosure Style

ECQ8

Reset

R

Illuminated E-Stop

X = Off  
Y = Yellow Solid  
G = Green Solid

R = Red Flashing

Blank = Standard  
S1 = Shroud Style 1

OD = OSSD Outputs with ISD

ECQ8 = 30 mm Round  
ED1Q8 = Flush Mount (square)

Blank = Without Local Reset  
R = With Local Reset

Family

SSA-ISD

Device Input Type

TC

Input Pin Configuration

A

ISD Connect

TC = 2 NC Sets of Dry Contacts

A = 5-Pin Config A

Pin

Config A

1 Ch1a

2 Ch1b

3 N/C

4 Ch2a

5 Ch2b

# Configure Your System in Minutes

The feature-rich SC10 and SC/XS26 safety controller software provides a seamless user interface for setting up and managing safety systems. The software features an intuitive icon-based, drag-and-drop user interface to reduce the learning curve and speed up commissioning.


- Complex configurations made easy
- Simulate configurations before implementation
- Auto configure Industrial Ethernet for remote monitoring and diagnostics

Start using the **free software** today. Go to [www.bannerengineering.com/safetycontroller](http://www.bannerengineering.com/safetycontroller)

### 1. Choose Controller




### 2. Equipment View

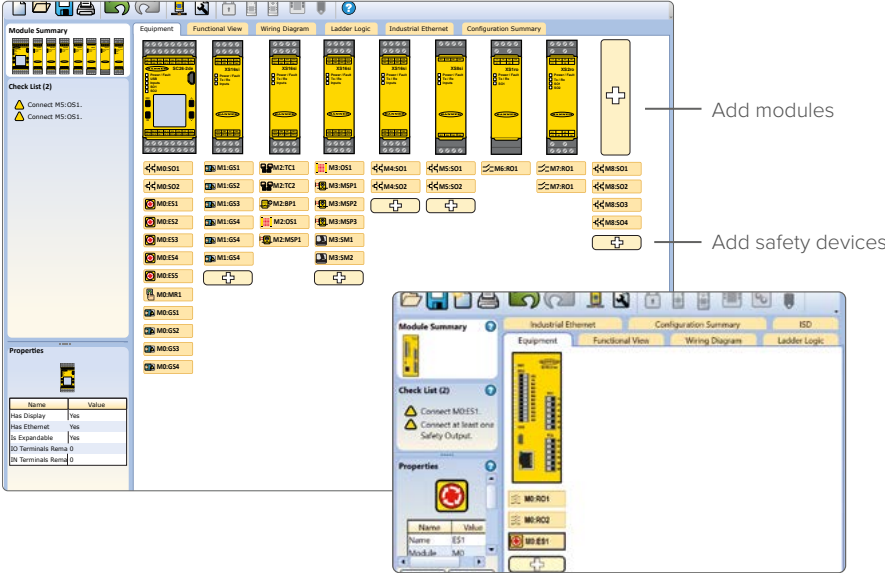


### 3. Add safety devices



### 4. Select safety device properties

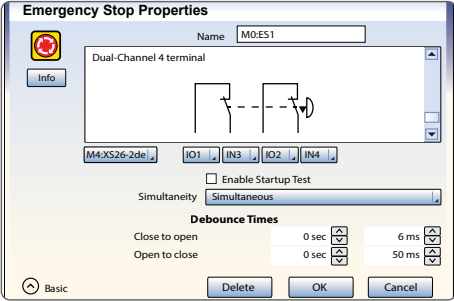


### 5. Add virtual non-safety inputs

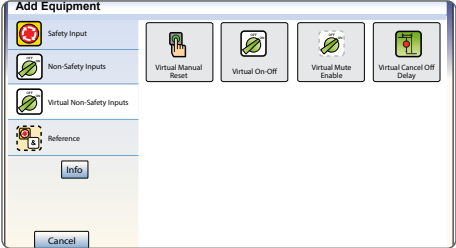


### Intuitive setup and PLC integration


- Expedite PLC Integration with Tag Export Feature
- Eliminates error-prone manual entries
- Import tags to PLC via .csv or .xml files
- Defines actionable In-Series Diagnostic data within the PLC
- For more information visit [bannerengineering.com/safetycontroller](http://bannerengineering.com/safetycontroller)

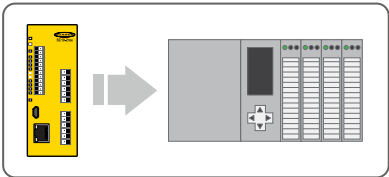


# System Software

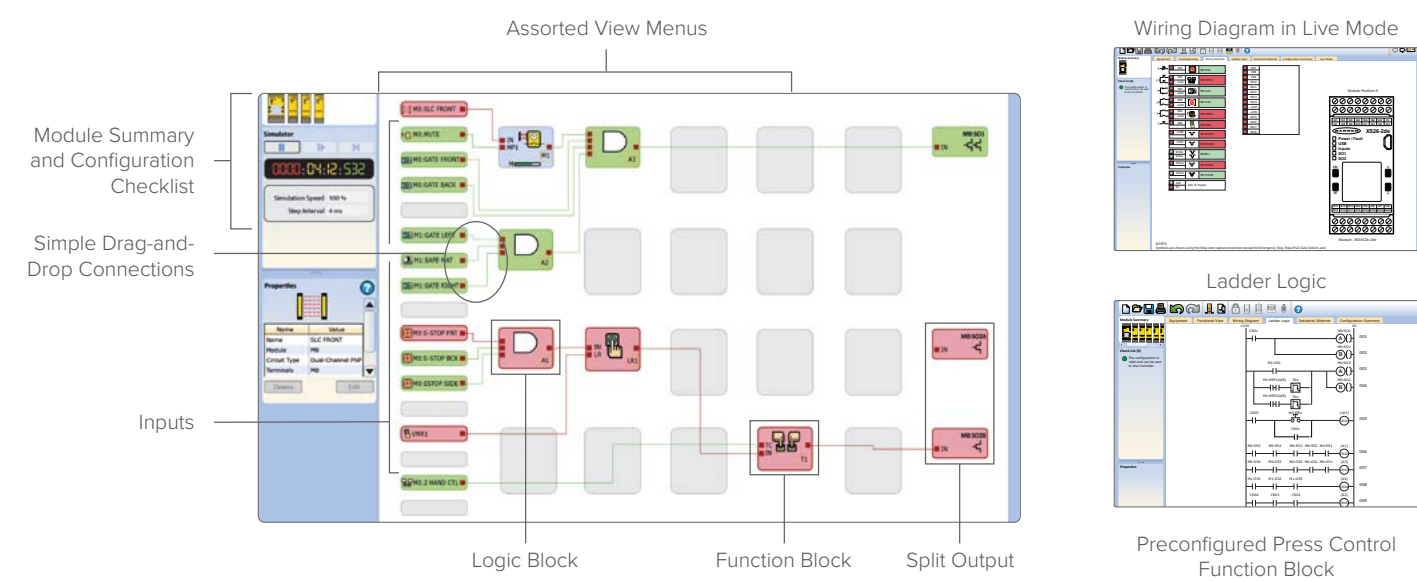

### View Live Mode for Current System Status

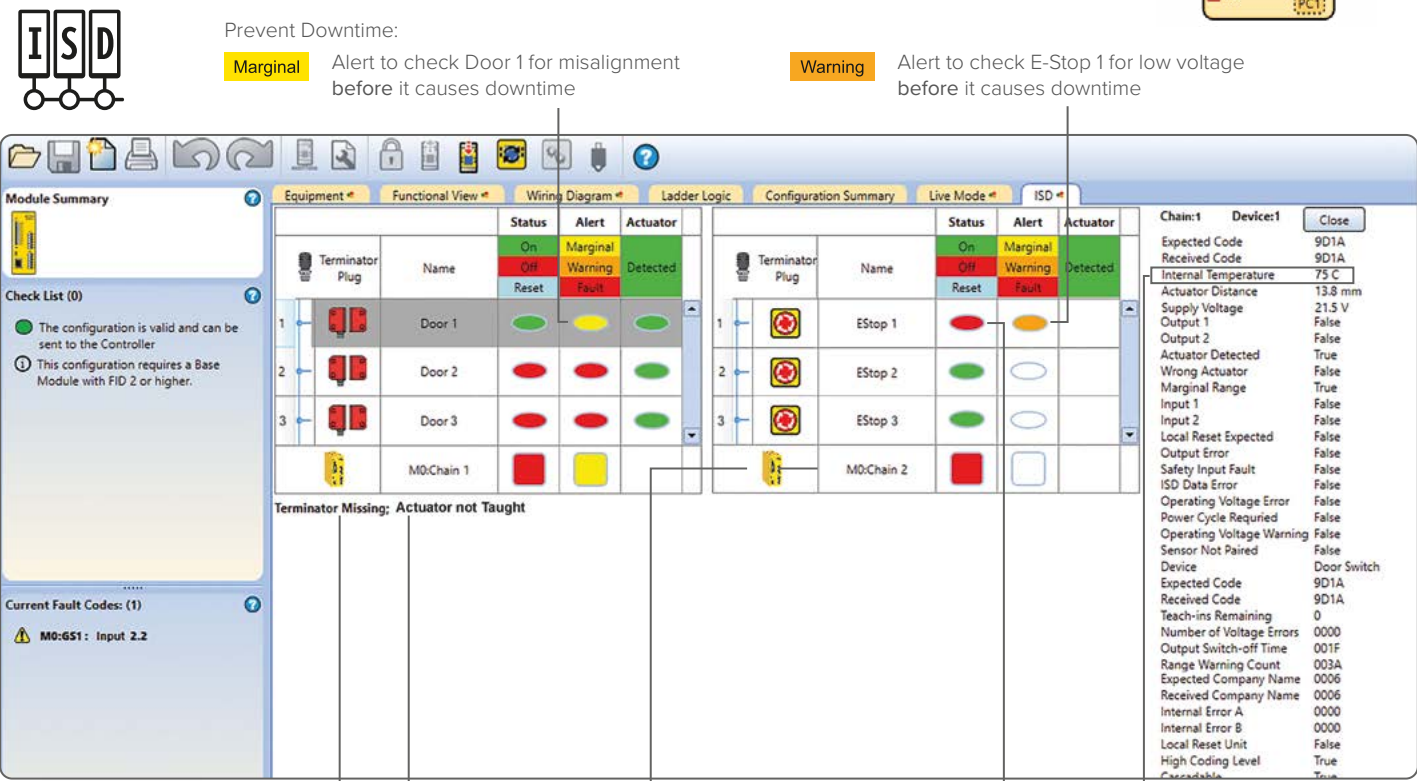

Troubleshooting Made Easy:

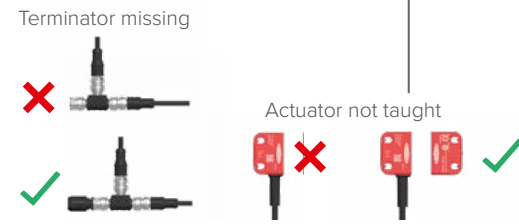

Up to 32 ISD safety devices in any order per chain


Reduce Downtime: Local operator guidance to activated E-Stop

Additional uses for ISD


- Rotation/Indexing
- Tool Identification
- Position Verification

Safety Relays

E-Stop and Guard Safety Modules

	Supply Voltage	Inputs	Safety Outputs	Aux. Outputs	Output Rating	Output Response Time	Models
	24 V AC/DC	1 NC & 1 NO (single or dual)	2 NO	–	6 A	35 ms	<b>GM-FA-10J</b>
		1 NC (single) or 2 NC (dual)	3 NO	–	6 A	25 ms	<b>ES-FA-9AA</b>
		1 NC (single) or 2 NC (dual)	2 NO	1 NC	7 A	25 ms	<b>ES-FA-11AA</b>
		1 NC (single)	3 NO	1 NC	6 A	35 ms	<b>ES-FA-6G</b>
	115 V AC & 12-24 V DC	1 NC (single) or 2 NC (dual)	4 NO	1 NC & 2 PNP	6 A	25 ms	<b>ES-UA-5A</b>
	230 V AC & 12-24 V DC						<b>ES-VA-5A</b>


Universal Safety Input Modules

	Supply Voltage	Inputs	Safety Outputs	Aux. Outputs	Output Rating	Output Response Time	Models
	24 V AC/DC	1 NC (single) or 2 NC (dual) or 2 PNP	3 NO	–	6 A	25 ms	<b>UM-FA-9A</b>
			2 NO	1 NC	7 A		<b>UM-FA-11A</b>


Modules for Specific Monitoring Applications

	Supply Voltage	Inputs	Safety Outputs	Aux. Outputs	Output Rating	Output Response Time	Models
	115 V AC & 12-24 V DC	1 (or multiple in series) 4-wire safety mat	4 NO	1 NC & 2 PNP	6 A	50 ms	<b>SM-GA-5A</b>
	230 V AC & 12-24 V DC						<b>SM-HA-5A</b>
	24 V AC/DC	1 (2x2 complementary) for two-hand control	2 NO	–	6 A	35 ms	<b>AT-FM-10K</b>


Muting Modules

	Supply Voltage	Input Device	Inputs	Safety Outputs	Aux. Outputs	Output Rating	Output Response Time	Models
	24 V DC	Electromechanical & solid state	2 NC muteable (dual) & 2 NC SSI (dual)	2 PNP OSSD	1 PNP	0.5 A	10 ms	<b>MMD-TA-12B</b>
				2 NO	1 NC	6 A	20 ms	<b>MMD-TA-11B</b>

Safe Speed Monitoring Modules


	Supply Voltage	Inputs	Safety Outputs	Aux. Outputs	Output Rating	Ranges (impulses/minute)	Models
	24 V AC/DC	2 PNP	2 NO	1 NC	4 A	5-40, 35-340, 300-2700, 1200-10500	<b>SSM-FM-11A10</b>
						10-80, 80-650, 600-5300, 2400-20000	<b>SSM-FM-11A20</b>

Interface Modules

	Supply Voltage	Inputs	Safety Outputs	Aux. Outputs	Output Rating	Output Response Time	Models
	24 V DC	2 NC	3 NO	–	6 A	20 ms	<b>SR-IM-9A</b>
			2 NO	1 NC			<b>SR-IM-11A</b>
			3 NO	–			<b>IM-T-9A</b>
			2 NO	1 NC			<b>IM-T-11A</b>

Safety Controllers


Non-expandable Safety Controllers

	Description	Housing H x W x D (mm)	Inputs/Convertible	Independently Controlled Safe Outputs	Maximum Safety Output Rating	Features	Models (24 V DC)
	SC26 Safety Controller	110 x 45 x 128	26/8	2 Dual Channel PNP	0.5A at 24 V DC	Display	<b>SC26-2d</b>
						Display, Ethernet	<b>SC26-2de</b>
						–	<b>SC26-2</b>
	SC10 Safety Controller	115 x 45 x 100	10/4	2 Dual Channel Relays	2x 3 NO: 6A 250 V AC/ 24 V DC	Ethernet	<b>SC26-2e</b>
						ISD, Ethernet	<b>SC10-2roe</b>

Expandable Safety Controllers

	Description	Housing H x W x D (mm)	Inputs/Convertible	Independently Controlled Safe Outputs	Maximum Safety Output Rating	Features	Models (24 V DC)
	XS26 Expandable Safety Controller	110 x 45 x 128	26/8	2 Dual Channel PNP	0.5A at 24 V DC	Display	<b>XS26-2d</b>
						Display, Ethernet	<b>XS26-2de</b>
						–	<b>XS26-2</b>
						Ethernet	<b>XS26-2e</b>
	Safety Input Module		8/2	–	–	–	<b>XS8si</b>
			16/4	–	–	–	<b>XS16si</b>
	Safety Output Module		–	2 Dual Channel PNP	0.75A at 24 V DC	–	<b>XS2so</b>
			–	4 Dual Channel PNP	0.5A at 24 V DC	–	<b>XS4so</b>
	Safety Relay Output Module	W: 22.5 mm	–	1 Dual Channel Relay	6A; 2 NO, 1 NC Aux (2.5A)	–	<b>XS1ro</b>
			–	2 Dual Channel Relays	6A; 2x 2 NO, 2x 1 NC Aux (2.5A)	–	<b>XS2ro</b>
	Network Expansion Module		–	–	–	Ethercat	<b>XSeCAT</b>

Expansion Modules

	Supply Voltage	Inputs	Safety Outputs	Output Rating	Aux. Outputs	Output Response Time	Delay	Models
	24 V DC	1 NC (single) or 2 NC (dual)	4 NO	6 A	–	20 ms	–	<b>EM-T-7A</b>
	24 V AC/DC	1 NC (single)	4 NO w/delay		–	35 ms	–	<b>EM-F-7G</b>
					–	–	0.5 s	<b>EM-FD-7G2</b>
					–	–	1.0 s	<b>EM-FD-7G3</b>
					–	–	2.0 s	<b>EM-FD-7G4</b>

Accessories



SC-USB2  
USB Cable



SC-XM2  
Memory Card for XS26 and SC26




SC-XM3  
Memory Card for SC10



SC-XMP2  
SC-XM2/3 Configuration Tool





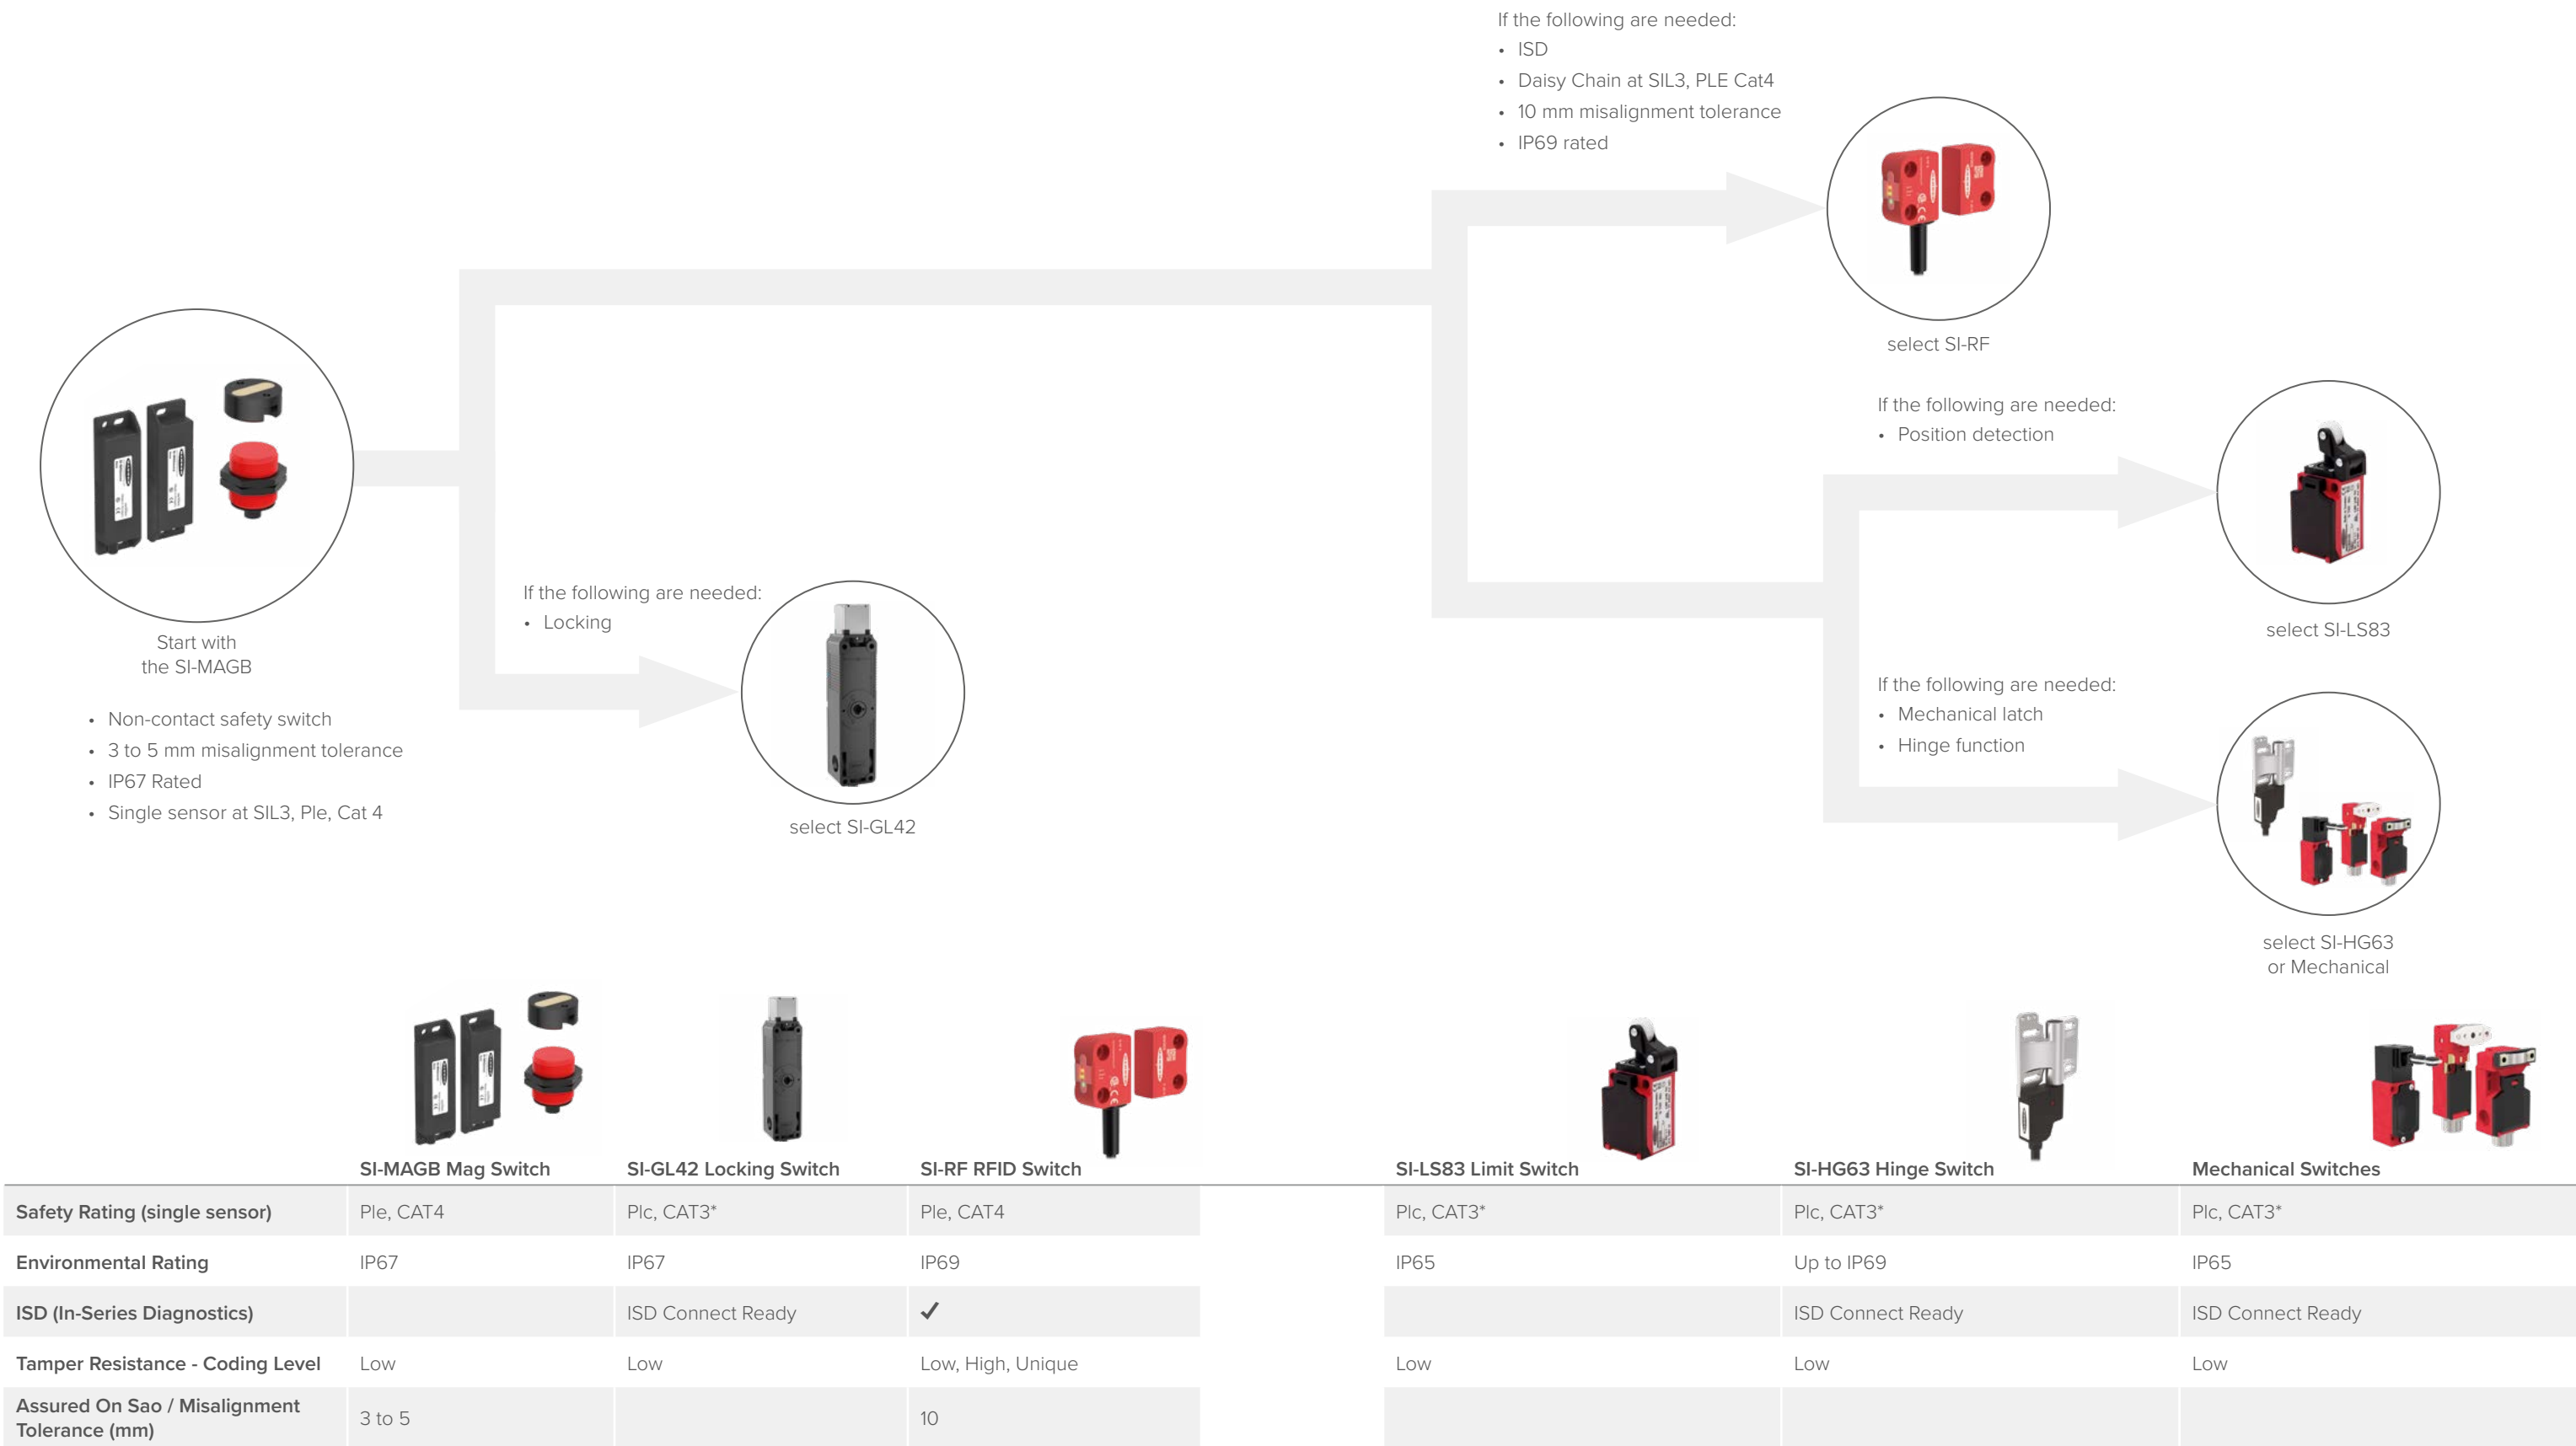







# Choosing a Banner Safety Switch



\*Ple/Cat 4 achieved with applicable second safety switch added

# Safety Switches Selection Guide

																			
SI-MAG		SI-RF		SI-LS		SI-QS		SI-LM40		SI-GL42		SI-LS42		SI-LS83		SI-HG63		SI-HG80	
p. 58		p. 60		p. 58		p. 58		p. 58		p. 58		p. 58		p. 58		p. 58		p. 58	
Device Type		Magnetic		RFID		Lockable		Lockable		Lockable		Lockable		Plunger, Roller, Spindle-mount, Lever		Hinge		Hinge	
Switch Style		Non-Contact		Non-Contact		Separate Actuator		Separate Actuator		Separate Actuator		Separate Actuator		Limit		Hinge		Hinge	
Non-Locking		✓		✓		✓		✓		✓		✓		✓		✓		✓	
Locking										✓		✓							
Position		✓		✓															
Contacts		1 NC, 1 NO		OSSD PNP		2 NC, 1 NO 1 NC, 1 NO 2 NC		1 NC, 1 NO 2 NC 2 NC, 1 NO 1 NC		1 NC, 1 NO 2 NC 2 NC, 1 NO		1 NO 1 NC 1 NC, 1 NO 2 NC 2 NC, 1 NO 3 NC		1 NC, 1 NO 2 NC 1 NC 2 NC 3 NC		2 NC, 1 NO		SPDT	
Locking or Unlocking Power										24 V AC/DC		24 V AC/DC 110 V AC/230 V AC							
Straight Rigid Inline						✓				✓		✓		✓					
Rigid Inline						✓		✓				✓							
Flexible Inline						✓		✓		✓		✓							
High-Force Accessory								✓											
LED Status Indication				✓															
Cascadable				✓															
ISD (In-Series Diagnostics)				✓															
Coding level/ Manipulation protection EN ISO 14119		Low coding		Unique/Low/High coding		Low coding		Low coding		Low coding		Low coding		Uncoded		Uncoded		Uncoded	
Housing Material		Plastic		Plastic		Plastic		Plastic		Metal		Head: Metal Body: Plastic		Plastic		Plastic		Metal	
Locking												Spring lock Solenoid lock		Spring lock Solenoid lock					
Actuation Extraction Force						10 N		10 N High-Force models: adjust. from 50-100 N		10 N, 20 N		1500 N when locked		2000 N when locked					

# Safety Switches



The SI-GL42D fail-safe guard locking switch has several guard locking options: manual, spring-to-lock, or power-to-lock.

The safety switch can manually be unlocked using a tool in case of maintenance work. Emergency or escape release are additional functions that allow for quick intervention when required.

In spring-to-lock models, the guard is locked by spring force. To unlock, the solenoid must be energized.

In power-to-lock models, the guard is locked when the solenoid is energized. To unlock, power must be switched off.

Hinge Switches



- One-piece sensor and actuator with hinge function
- Fast installation and setup with repositionable safety switch point
- Stainless steel and IP69 available
- Matching hinges without sensing available for additional door support
- Available with up to 270° safety switch point operation range

Non-Contact Switches



- Two-piece design where sensor and actuator do not contact
- Coded magnets/tags minimize the potential for intentional defeat
- A single pair can achieve up to Category 4/PLe safety rating
- Accommodating to misalignment
- Non contact solution minimizes device wear and tear, even in applications with persistent use
- Up to IP69 solutions available

Mechanical Switches



- Two-piece design with mechanical operator feedback
- Flexible actuator options for misalignment
- Rotatable heads for flexible installation
- Mechanically coded actuator to minimize tampering
- Up to 15N latching force to reduce downtime due to vibrating doors
- One-piece limit switches available

Locking Switches



- Two-piece design with up to 2000N locking force for safety or process critical applications
- Flexible actuator options for misalignment
- Rotatable heads for flexible installation
- Mechanically coded actuator to minimize tampering
- Up to 15N latching force to position door prior to locking

Limit Switches



- Cost effective one piece sensor
- No actuator allows for fewer alignment issues
- Hideable making them more tamper resistant
- Rotating head and top or side engagement allows for eight different actuator positions
- Design meets positive opening requirements for safety switches




Rotatable actuator heads enable a variety of mounting positions: standard, vertical, horizontal, slight vertical/horizontal offset, small actuating radius

Emergency release enables immediate opening from outside dangerous area




Lock/unlock mechanism

M12 connector options are available

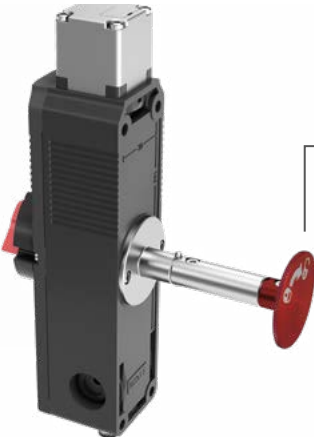

Escape release enables immediate opening from within the dangerous area

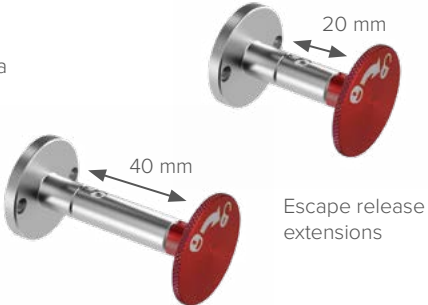

Escape release extensions



# Non-Contact RFID Safety Switches



Safety switches respond when a mechanical guard is opened. They feature “positive opening” contacts for high reliability regardless of environmental conditions and withstand attempts to override the switch and defeat the system.

RFID SI-RF Switches



- Single door RFID non-contact gate/door sensing solution
- Basic, medium, and high tamper resistance
  - Misalignment tolerance of 10 mm
  - Resistant to high vibration and operations with metallic shavings
  - On-board LED for status and diagnostics

RFID SI-RF Switches – Cascade



- Multiple door RFID non-contact gate/door sensing solution
- Basic, medium, and high tamper resistance
  - Misalignment tolerance of 10 mm
  - Resistant to high vibration and operations with metallic shavings
  - On-board LED for status and diagnostics
  - Connect up to 32 sensors in cascade while maintaining the highest level of safety
  - 4-pin QD connections for cost-effective, simple, error-free installation
  - RFID cascade with In-Series Diagnostics available



# Enabling Devices




A two-hand control safeguarding system will prevent the operator from approaching the machine while a hazard is present. Duo-Touch Run Bar provides an all-in-one solution.




Handheld grip-styled switches are used for manual control of machine functions including visual observations, minor adjustments, calibration, and more.

Two-Hand Control



STB Self-Checking Touch Buttons					
Connection	Touch Surface Material	Output	Power Supply	Models	
2 m cable	Polyetherimide (PEI)	Solid-state 2 Complementary PNP (1 ON, 1 OFF)	10-30 V DC	STBVP6	
4-pin M12 QD				STBVP6Q5	
2 m cable		E/M Relay 2 Complementary SPST (1 NC, 1 NO)	20-30 V AC/DC	STBVR81	
5-pin M12 QD				STBVR81Q6	
STB buttons include yellow field cover to prevent unintended switching. To comply to safety standards, STB buttons must be used with appropriate Two-Hand control modules, SC26, XS26 or SC10 Safety Controller or comparable Type IIIC Two-Hand system.					



DUO-TOUCH Two-Hand Control Kits with STB Touch Buttons 2 NO safety outputs, no auxiliary outputs, 24 V AC/DC, Cat 4 and Type IIIC					
Module	IP Rating	STB Buttons (2 pieces)	IP Rating	Connection	Kits
AT-FM-10K	IP20	STBVP6	IP66	2 m cable	<b>ATK-VP6</b>
		STBVP6Q5		4-pin M12 QD	<b>ATK-VP6Q5</b>
Kit does not include run bar					

Two-Hand Control Run Bars


Run Bars with STBVP6					
Models	IP Rating	Models	IP Rating	Connection	E-Stop
<b>STBVP6-RB1</b>	IP20	STBVP6-RB2	IP65	Terminal strip	Not included
<b>STBVP6-RB1Q8</b>		STBVP6-RB2Q8		8-pin 7/8 QD	Not included
<b>STBVP6-RB1E02</b>		STBVP6-RB2E02		Terminal strip	SSA-EBM-02L

Enabling Devices

ED1G Enabling Devices		
Contact Configuration	Momentary Push Button	Models
2 NO & 1 NC Aux	–	<b>ED1G-L21SM-1N</b>
2 NO & 1 NC Aux	1 NO	<b>ED1G-L21SMB-1N</b>
2 NO	2 NO	<b>ED1G-L20MB-1N</b>

# Safety Switches

## Magnetic Switches



Family

SI-MAGB

Housing

1

1 = Rectangular  
2 = Small  
3 = Round

Device Type

SM

SM = Sensor  
MM = Magnet

Connection Orientation


Blank = Standard  
CO = Opposite

Connection

Blank = 3 m cable  
QD = 4-pin QD  
-W/30 = 9 m cable

NOTE: When ordering housing 1 or 2 with a QD connection, you will receive an M8 Pico connector. When ordering housing 3 with a QD connection you will receive an M12 Euro connector.

## RFID Switches



Family

SI-RF

System Type

P

P = Single  
S = Cascade  
D = Cascade with ISD

Reset

T

T = Automatic (Trip)  
L = Manual (Latch)

Coding

U

L = Low  
H = High  
U = Unique

Connection

P8

P8 = 250 mm pigtail, M12 8-pin QD  
2M = 2 m cordset\*  
P5 = 250 mm, M12 5-pin QD\*

\*Available on single models only


Tamper Resistant Coding

Low (L): The SI-RF Safety Switch accepts any SI-RF-A actuator

High (H): The SI-RF Safety Switch only accepts the last taught-in actuator, a maximum of 12 teach-in processes are possible

Unique (U): The SI-RF Safety Switch only accepts the taught-in actuator, and only one teach-in process is possible

## Hinge Switches



Family

SI-HG63

SI-HG63 = Stainless Steel  
SI-HGZ63 = Zinc Die-cast

Contact Configuration

F

F = 2 NC/1 NO

Connection

QD

QD = 6-pin Micro-style QD  
5M = 5 m cable with flying leads

Switch Position

R

R = Switch mounted on right side of hinge  
L = Switch mounted on left side of hinge  
B = Switches mounted on both sides of hinge\*

Connection Exit

Blank = Inline QD/Cable  
R = Right angle QD/Cable

Washdown Rating

-W

Blank = IP67  
-W = IP69 Washdown\*

\*Stainless steel models only

## Brackets



SI-HG80DQD

Inline QD Fitting

SI-HG80DQDR

Right-angle QD Fitting


SI-HG80A

Blank Hinge

SI-HG63A

Blank Hinge


## Adaptor Cable



MQEAC-601-Q5A

SI-HG63 to ISD Connect Adaptor Cable

## Mechanical Switches



Family

SI-LS

Body Style

83

83 = 83 mm  
100 = 100 mm

Contact Configuration

D

D = 1 NO/1 NC (83 mm models only)  
E = 2 NC (83 mm models only)  
F = 2 NC/1 NO (100 mm models only)

Connection

Blank = Screw terminals  
Q5A = M12 connector; ISD Connect Compatible (SI-LS83E-Q5A and SI-LS100F-Q5A only)

## Actuators



SI-QS-SSA-2


Straight Rigid Inline Actuator

SI-QS-SSA-3

Right-Angle Rigid Inline Actuator

SI-QS-SSU

Flexible Inline Actuator



Family

SI-LM

Body Style

40MKH

40MKH = Inline actuator

Contact Configuration

D

D = 1 NO/1 NC  
E = 2 NC  
F = 2 NC/1 NO

Connection

Blank = Screw terminals  
Q5A = M12 connector; ISD Connect Compatible (SI-LM40KHE-Q5A only)

## Actuators



SI-QM-SSA

Straight Rigid Inline Actuator


SI-QM-SMFA

Flexible Inline Actuator



# Safety Switches

## Locking Switches

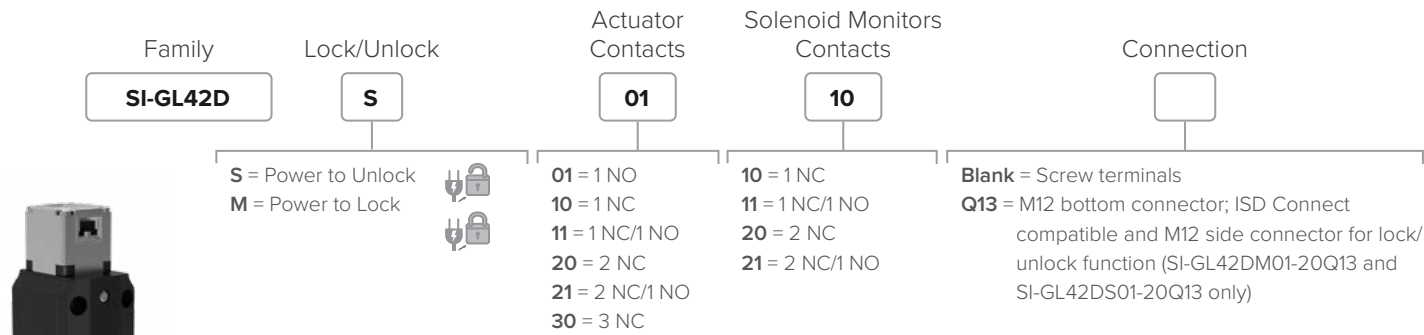

## Actuators

**SI-QM-SSA-2**  
Straight rigid actuator for sliding or removable guards

**SI-QM-SSA-2RA**  
Flat rigid actuator for sliding or removable guards

**SI-QM-SMFA-2**  
Flexible actuator for small hinged guards 150 mm or larger

**SI-QM-SMFA-3**  
Flexible actuator for small hinged guards 400 mm or larger

## Unlock Mechanism

**SI-QM-SSA-SHER**  
Sliding door handle with emergency release (-SH model without emergency release)

**SI-GL42-ERS-F-1**  
Front mount emergency release lever


**SI-GL42-ERS-B-1**  
Back mount emergency release lever

**SI-GL42-ERBD-B-1**  
Back mount escape release mechanism


**SI-GL42-EM20-1**  
20 mm extension for escape release mechanism

**SI-GL42-EM40-1**  
40 mm extension for escape release mechanism


## Locking Switches

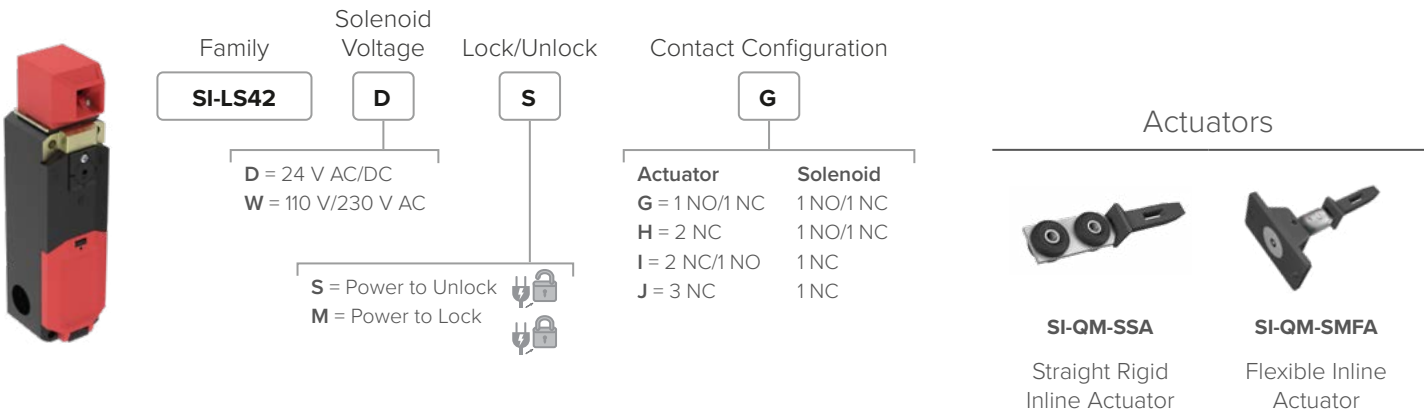

## Limit Switches

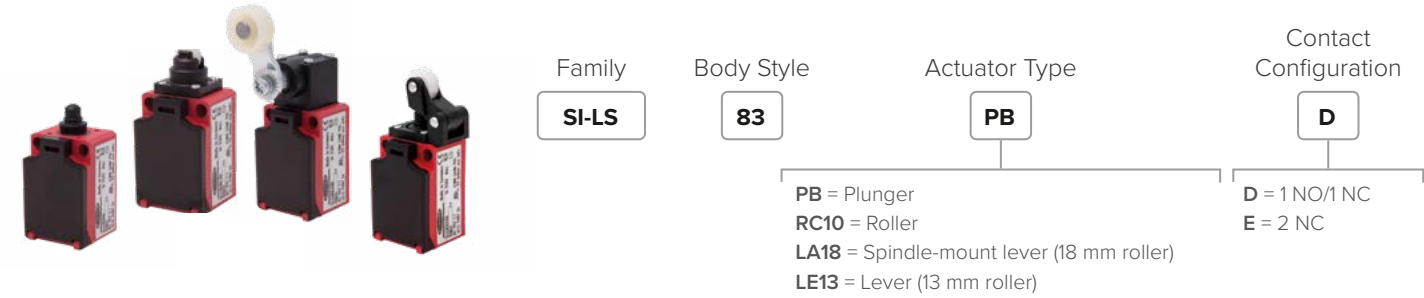

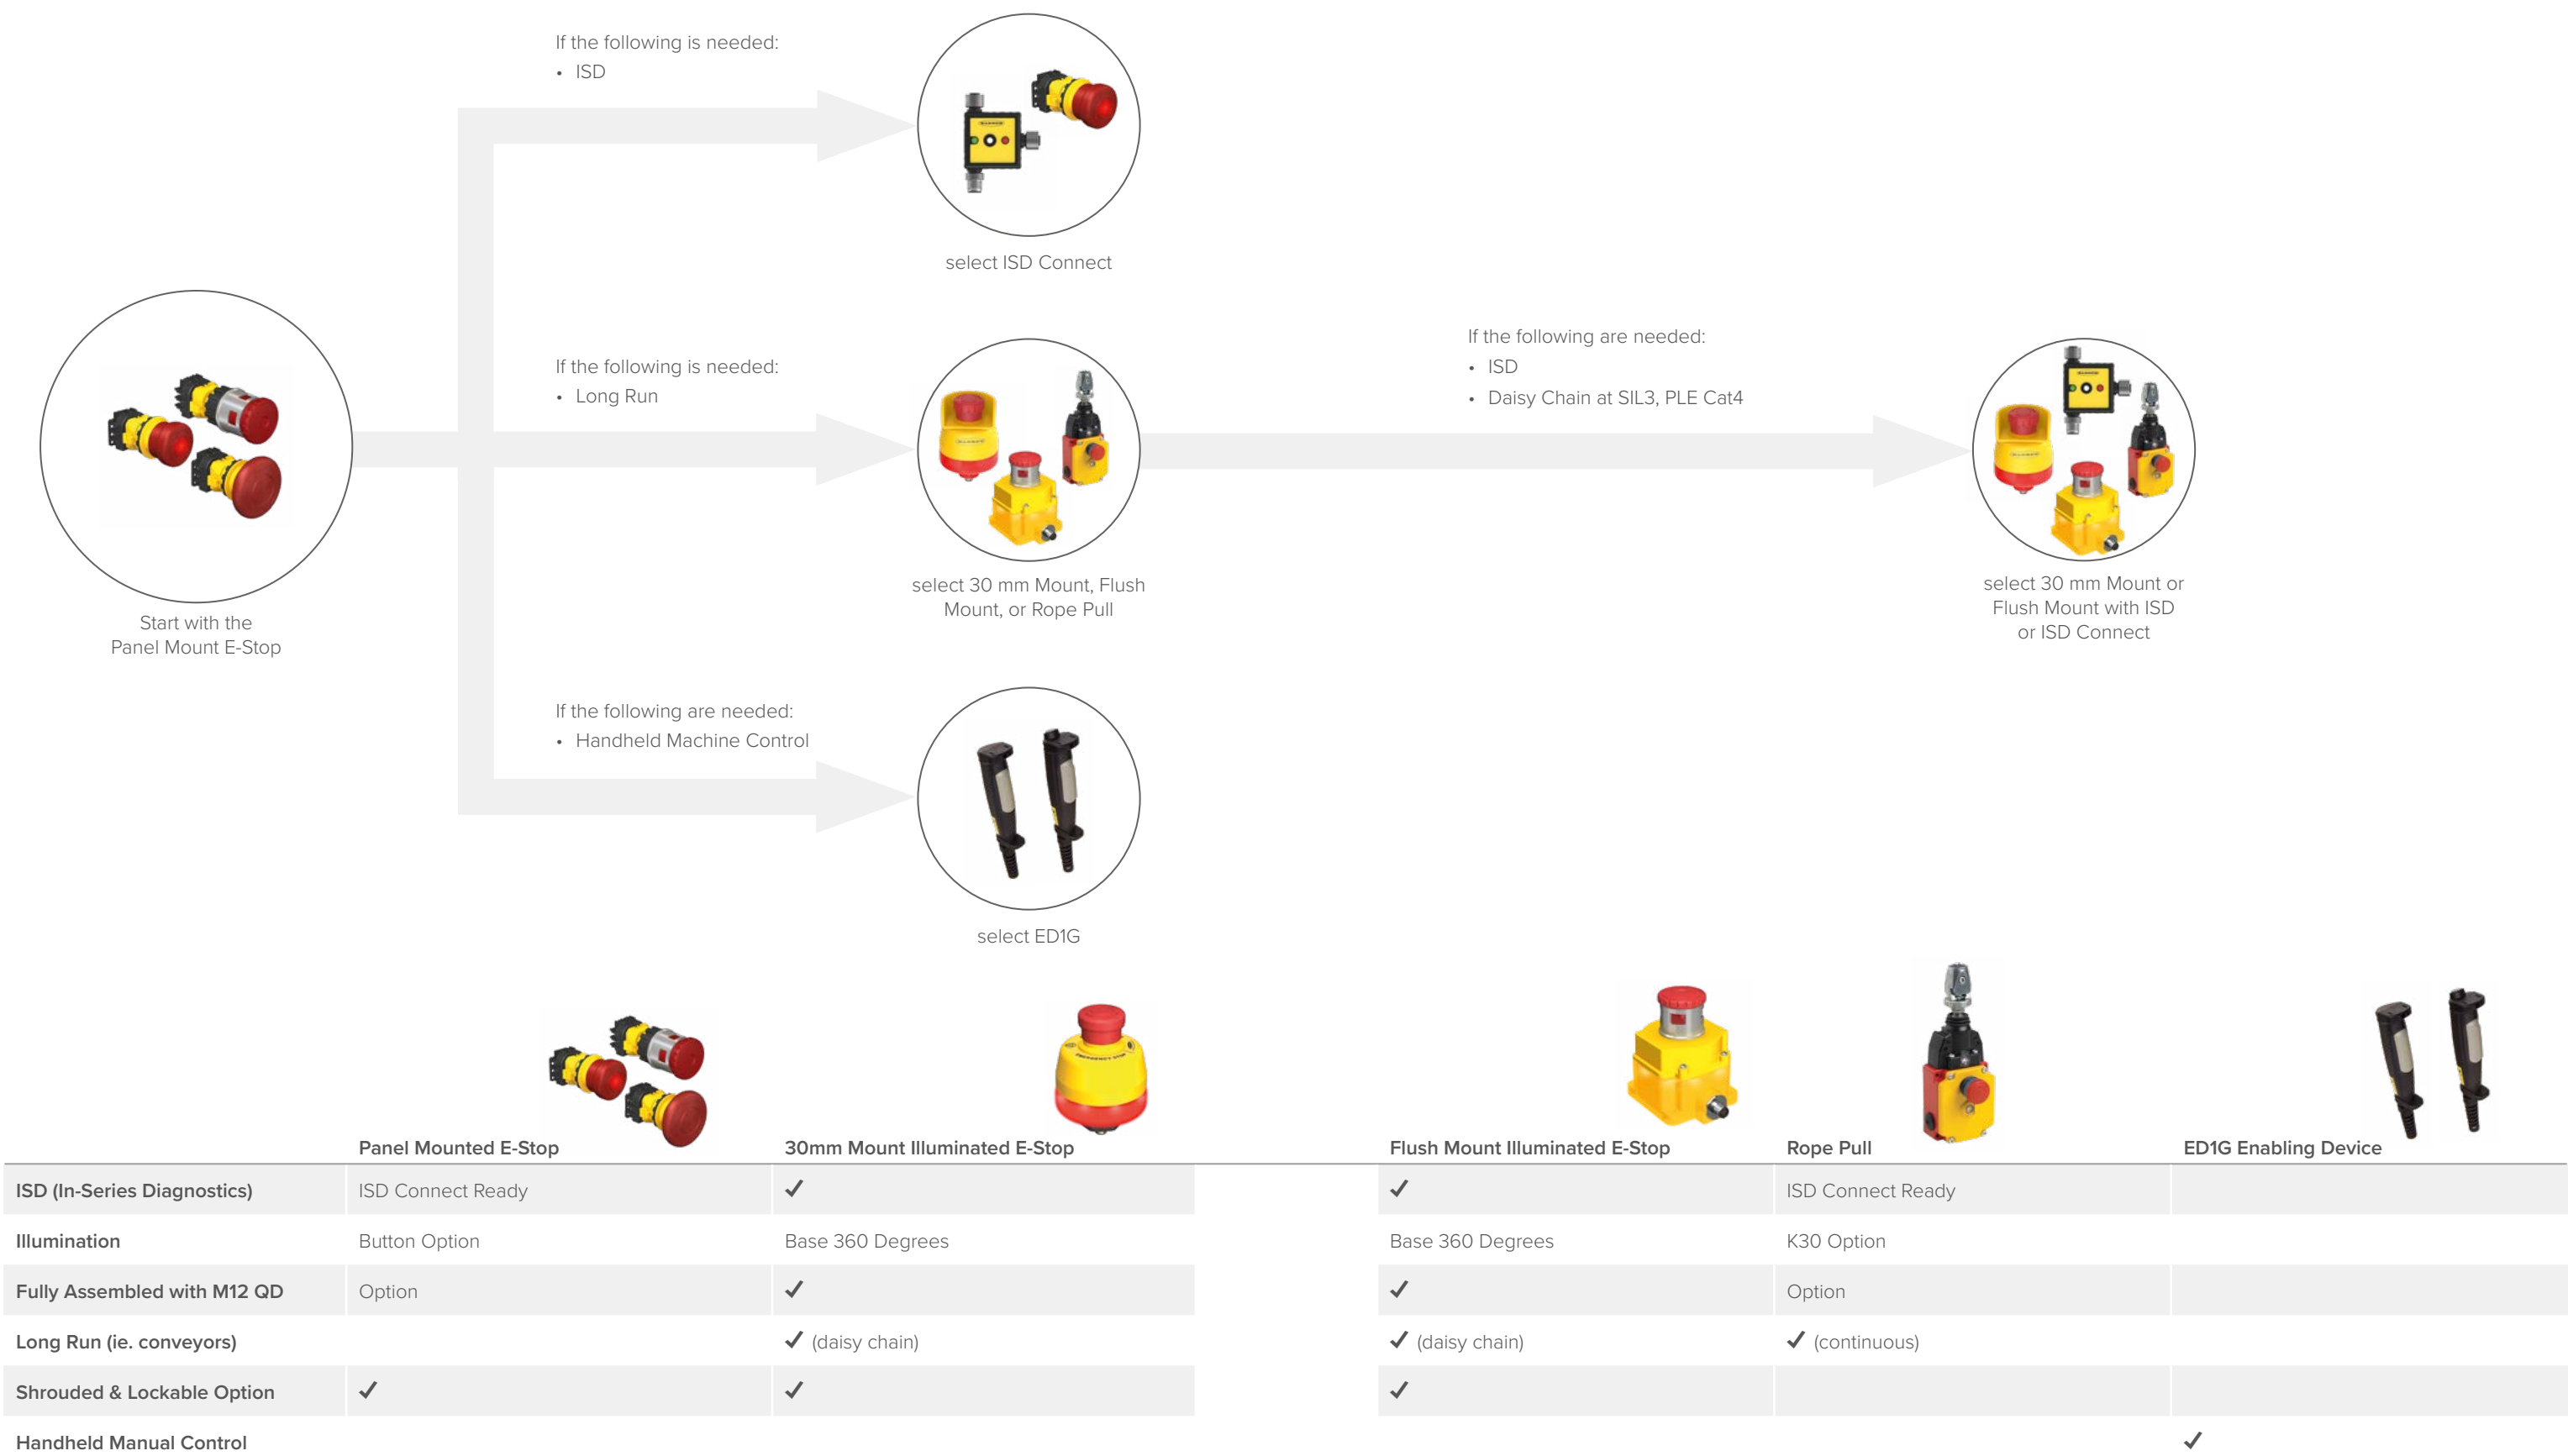


# Choosing a Banner E-Stop Device





# E-Stop Devices Selection Guide

											
SSA-EBM		SSA-EB		SSA-EB1PL	SSA-EB1P	SSA-EB1M	RP-RM83	RP-LS42	RP-QM(T)72	RP-LM40	RP-QM90
p. 70		p. 70		p. 70	p. 70	p. 70	p. 71	p. 71	p. 71	p. 71	p. 71
Panel Mount Emergency Stop Buttons		Emergency Stop Buttons					Rope Pull Emergency Stop Switches				
E-Stop	✓	✓		✓	✓	✓	✓	✓			
Rope Pull							✓	✓	✓ (only stop control)	✓ (only stop control)	✓
Button Size (mm)	40 mm	40, 44, 60 mm		40, 60 mm	40, 60 mm	44 mm	32 mm	32 mm			
Illuminated Housing				✓		✓					
Illuminated Button		✓		✓	✓						
Release	✓	✓		✓	✓	✓	✓				
Lock/Unlock Button		✓ (SSA-EB1M only)				✓					
Rope Length (m)							38 m 70 m	25 m 37.2 m 75 m	6 m 12 m 20 m	6 m	50 + 50 m
Rope Connection							Built-in turnbuckle or ring connection	Built-in turnbuckle or ring connection	Ring connection	Ring connection	Ring connection
ISD (In-Series Diagnostics)				✓	✓						
Safety Contacts	1 NC 2 NC	1 NC 2 NC 3 NC 4 NC		1 NC 2 NC 4 NC	1 NC 2 NC 4 NC	1 NC 2 NC 4 NC	2 NC	2 NC	2 NC 4 NC	2 NC	2 NC
Auxiliary Contacts	1 NO	1 NO 2 NO		1 NO 2 NO	1 NO 2 NO	1 NO 2 NO	2 NO	2 NO	1 NO (specific models)		2 NO
OSSD Outputs				✓	✓						
Connection	Screw terminals	Screw terminals		M12 or Screw terminals	M12 or Screw terminals	M12 or Screw terminals	Screw terminals	Screw terminals	Screw terminals	Screw terminals	Screw terminals
Panel/Bracket Hole (mm)	22 mm	30 mm		30 mm	30 mm						

E-Stop Devices

E-Stop Buttons\*

Family

SSA-E

Version

B1

Button Body

M

LED Function

Options

Interface/Contact Configuration

02

Enclosure

EC

Termination

Connection

Extension

B1 = Palm button, 40/44 mm button, 30 mm hole

B2 = Palm button, 60 mm button, 30 mm hole

Blank = none

L = OFF/red solid

LYR = yellow/red

LGR = green/red

LXR = OFF/red flashing

L2 = Illuminated push button; Push = ON

M = Metal lockable base button

P = Plastic base button

Blank = Standard

P = Padlock capable

S1 = Shroud style 1

02 = 2 NC

04 = 4 NC

11 = 1 NO/1 NC

12 = 1 NO/2 NC

13 = 1 NO/3 NC

22 = 2 NO/2 NC

OD = 2 Solid-state with ISD

EC = Compact OTB-style enclosure, 30 mm mounting

ED = DX80-style enclosure

Blank = Bottom exit (1x QD)

1 = One side exit (1x male QD if used)

Blank = Connection with terminals

Q# = number of pins/conductors

Blank = none

A = AB 1732DS Safety I/O

B = Siemens ET200pro/Turck

R = External manual reset for solid-state outputs

E-Stop Button Kits

Family

SSA-E

Version

B

Button Body

M

Interface/Contact Configuration

02

Enclosure

L

B = Palm button, 40 mm button, 22 mm hole

M = Metal base button

02 = 2 NC


11 = 1 NO/1 NC

12 = 1 NO/2 NC

L = Yellow ring label "Emergency Stop", without enclosure

E = Yellow ring label "Emergency Stop", with enclosure

Rope Pull E-Stop Devices



Maximum Rope Length	Rope Connection	Safety Contacts	Auxiliary Contacts	Actuation	Housing Material	Models
38 m	Built-in turnbuckle	2 NC in	2 NO in	Latch	Metal, IP67	RP-RM83F-38LT
75 m						RP-RM83F-75LT
38 m	Ring connection					RP-RM83F-38LR
75 m						RP-RM83F-75LR
25 m	Built-in turnbuckle				Plastic	RP-LS42F-25LE
37.5 m						RP-LS42F-38LE
75 m						RP-LS42F-75LE

Note: For auxiliary status output models add E to the end of the model number (example, RP-RM83F-38LTE)

Accessories

SSA-EB1P-ECWC

FDA Grade Silicone Washdown Cover, IP67 and IP69 rated

SSA-MBK-EEC1

SSA-MBK-EEC2

SSA-MBK-EEC3

Panel Mount E-Stop Buttons\*

Family

SSA-E

Version

B1

Button Body

M

LED Function

Options

Interface/Contact Configuration

02

Connection

02

B1 = Palm button, 40/44 mm button, 30 mm hole

B2 = Palm button, 60 mm button, 30 mm hole

Blank = none

L1 = Illuminated push button Independent wire

M = Metal lockable base button

P = Plastic base button

Blank = Standard

P = Padlock capable

S1 = Shroud style 1

02 = 2 NC

04 = 4 NC

11 = 1 NO/1 NC

12 = 1 NO/2 NC

13 = 1 NO/3 NC

22 = 2 NO/2 NC

Blank = Screw terminals

A01 = M12 QD; ISD Connect compatible (SSA-EB1P-02-A01 only)

Components for Wire Rope Assembly

RPA-C

Wire Ropes

RPA-T

Thimbles

RPA-CC

Clamps

RPA-TA

Turnbuckles

RPA-EB

Eye Bolts

RPA-P

Pulleys

RPA-DP

Deflection Pulleys

RPA-S

Tensioning Springs

Hardware kits are available (RPAK)



Banner Engineering designs and manufactures industrial automation products including sensors, smart IIoT and industrial wireless technologies, LED lights and indicators, measurement devices, machine safety equipment, as well as barcode scanners and machine vision. These solutions help make many of the things we use every day, from food and medicine to cars and electronics. A high-quality, reliable Banner product is installed somewhere around the world every 2 seconds. Headquartered in Minneapolis since 1966, Banner is an industry leader with more than 10,000 products, operations on five continents, and a world-wide team of more than 5,500 employees and partners. Our dedication to innovation and personable service makes Banner a trusted source of smart automation technologies to customers around the globe.

