

SX Series



Safety Laser Scanners


- Stand Alone or Master and Remote functionality with simplified setup and wiring
- Protect personnel and equipment with three independent safety outputs
- Ideal solution for complex applications with 70 unique safety zone sets, encoder inputs, and advanced measurement data
- Cost-effective, compact, one-piece design with 275° of monitoring
- Horizontal or vertical detection zones to reliably safeguard mobile vehicles, access points, work areas, and more





Three Independent Safety Outputs

Up to three safety zones can be monitored simultaneously and independently, reducing the need for multiple safety scanners or safety light curtains.

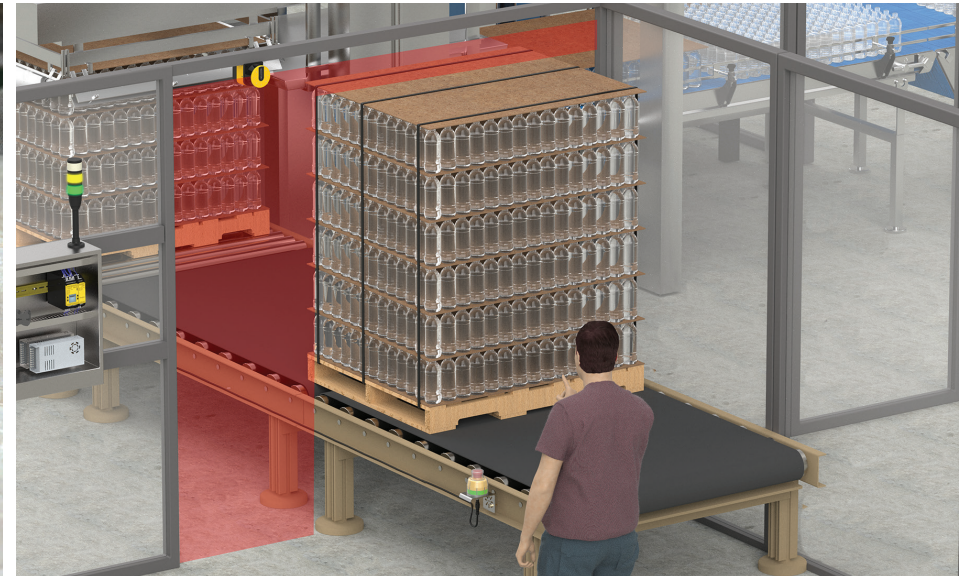


Dynamic and Partial Muting

Mute all or part of a safety zone without the need of an external muting module or controller. Each safety output can have its own zones and muting requirements.



Safeguarding a Work Area

A single SX5 safety laser scanner continuously scans a user-defined area up to 275° to create a two-dimensional protected zone, detecting staff or equipment entering the area.

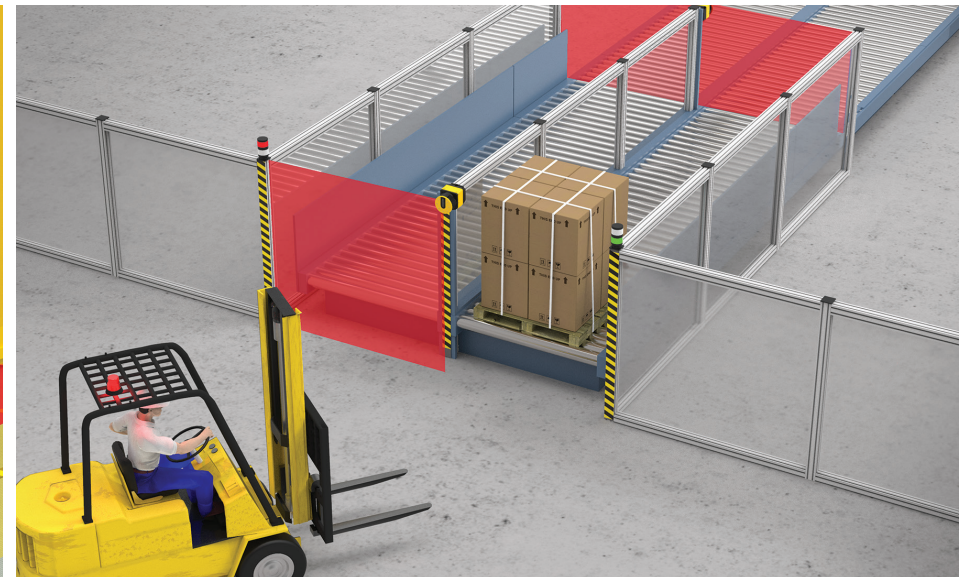

Vertical Applications and Zone Switching

Easy-to-use software allows for simple zone configuration and zone switching in vertical applications, such as forklift conveyor access.



Challenges


- Monitor multiple sides of an AGV or other mobile equipment
- Protect personnel and equipment with a moving environment and changing safety parameters
- Reduce hardware required for direct vehicle navigation
- Reduce cabling in mobile applications

Solution:

- With master/remote functionality, up to four SX5 safety laser scanners can be connected in a single system to guard all sides of a vehicle
- Up to 70 unique safety zone sets can be configured and activated based on the position, speed, and motion of the vehicle
- Encoder inputs and advanced measurement data output reduce the amount of hardware required and allow for direct vehicle navigation
- Remotes are each connected to the master by a single cable, reducing cable management and simplifying wiring


Master/Remote Functionality

Guard all sides of a vehicle and configure up to 70 unique safety zone sets to monitor the changing safety parameters of a mobile application.

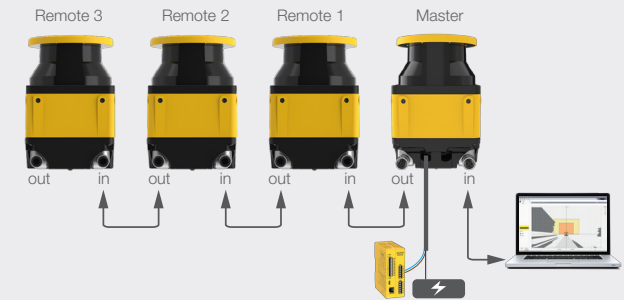

Safe Speed Monitoring

Incremental encoder inputs can be read directly by the scanner to select the appropriate safety zone based on the speed of the vehicle, reducing cost and eliminating the need for functions typically required by additional hardware like a safety PLC.

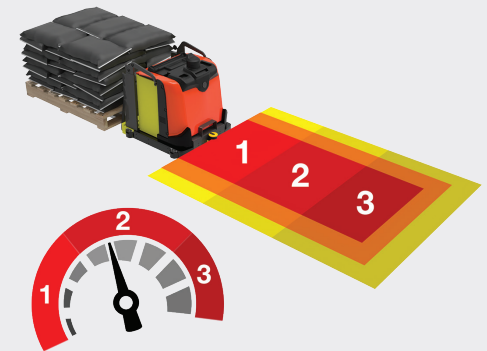

Dependable and Flexible Industrial Safeguarding



Horizontal or vertical monitoring of both personnel and stationary or mobile systems



A variety of status, diagnostic, warning and error displays



- LED 1: Object Detection in Safety Zone (OSSD)
- LED 2: Not Available
- LED 3: Assigned to Warning Zone 2
- LED 4: Assigned to Warning Zone 1
- LED 5: Interlock Status (waiting for Reset)

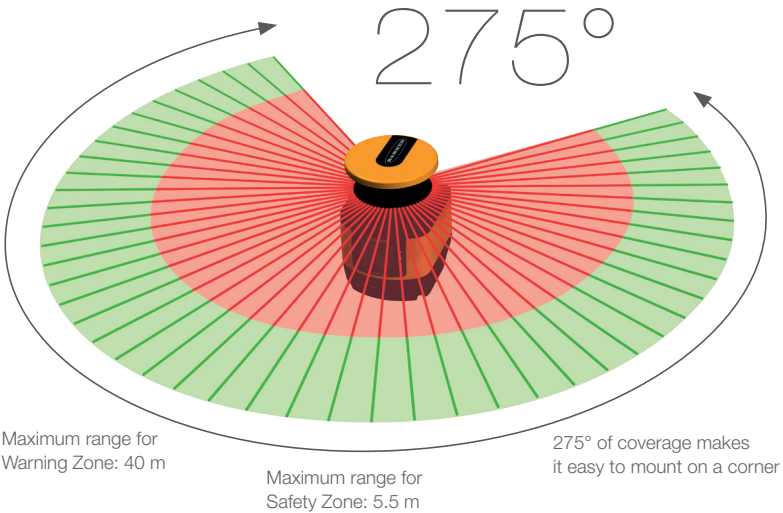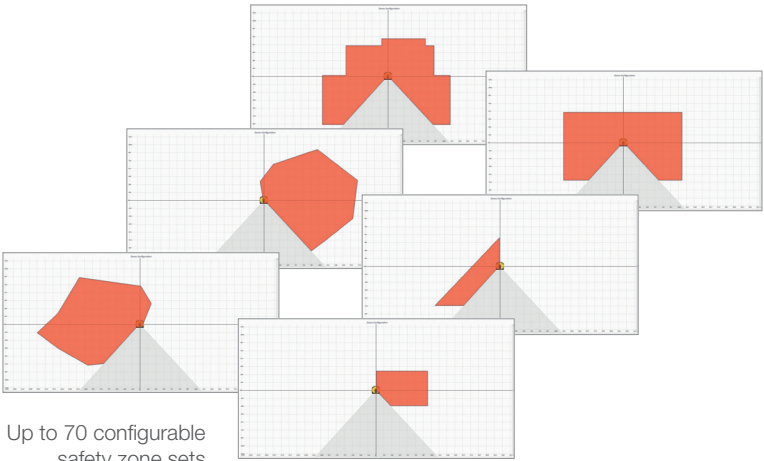

Safety Scanner System – Software

Simple Setup for Rapid Deployment

The SX5 can be set up in just a few simple steps using Banner's free configuration software. This robust software features menu-driven tools that guide users through setup and make it easy to design custom safety and warning zones to accommodate existing infrastructure and meet the specific needs of any application.

WARNING

Zoneset 1 -

- OSDD1
- Warn1

Monitoring

X = 730,00 mm Y = 500,36 mm 55%

SCANNER STATUS: MONITORING - ORIGINAL OPERATION: MONITORING

Zone Set Configuration

Zone Sets

ZoneSet No. 8 Input Delay Max [msec] 30

Zone	Area Switch 1	Area Switch 2	Area Switch 3
Zone Set 1	1	0	0
Zone Set 2	0	1	0
Zone Set 3	1	1	0
Zone Set 4	0	0	1
Zone Set 5	0	1	1
Zone Set 6	1	0	1

Input Signals

Pin	Area Switch	Output
PIN 1	AREA SWITCH 1	WHITE (ON)
PIN 2	AREA SWITCH 2	GREEN (ON)
PIN 4	AREA SWITCH 3	YELLOW (ON)

Output Configuration

Output Functions




















Signal	Function
OSDD	OSDD
Warning 1	Warning 1
Warning 2	Warning 2
Warning 3	Warning 3
Warning 4	Warning 4
Warning 5	Warning 5
Warning 6	Warning 6
Warning 7	Warning 7
Warning 8	Warning 8
Warning 9	Warning 9
Warning 10	Warning 10
Warning 11	Warning 11
Warning 12	Warning 12
Warning 13	Warning 13
Warning 14	Warning 14
Warning 15	Warning 15
Warning 16	Warning 16
Warning 17	Warning 17
Warning 18	Warning 18
Warning 19	Warning 19
Warning 20	Warning 20
Warning 21	Warning 21
Warning 22	Warning 22
Warning 23	Warning 23
Warning 24	Warning 24
Warning 25	Warning 25
Warning 26	Warning 26
Warning 27	Warning 27
Warning 28	Warning 28
Warning 29	Warning 29
Warning 30	Warning 30
Warning 31	Warning 31
Warning 32	Warning 32
Warning 33	Warning 33
Warning 34	Warning 34
Warning 35	Warning 35
Warning 36	Warning 36
Warning 37	Warning 37
Warning 38	Warning 38
Warning 39	Warning 39
Warning 40	Warning 40
Warning 41	Warning 41
Warning 42	Warning 42
Warning 43	Warning 43
Warning 44	Warning 44
Warning 45	Warning 45
Warning 46	Warning 46
Warning 47	Warning 47
Warning 48	Warning 48
Warning 49	Warning 49
Warning 50	Warning 50
Warning 51	Warning 51
Warning 52	Warning 52
Warning 53	Warning 53
Warning 54	Warning 54
Warning 55	Warning 55
Warning 56	Warning 56
Warning 57	Warning 57
Warning 58	Warning 58
Warning 59	Warning 59
Warning 60	Warning 60
Warning 61	Warning 61
Warning 62	Warning 62
Warning 63	Warning 63
Warning 64	Warning 64
Warning 65	Warning 65
Warning 66	Warning 66
Warning 67	Warning 67
Warning 68	Warning 68
Warning 69	Warning 69
Warning 70	Warning 70
Warning 71	Warning 71
Warning 72	Warning 72
Warning 73	Warning 73
Warning 74	Warning 74
Warning 75	Warning 75
Warning 76	Warning 76
Warning 77	Warning 77
Warning 78	Warning 78
Warning 79	Warning 79
Warning 80	Warning 80
Warning 81	Warning 81
Warning 82	Warning 82
Warning 83	Warning 83
Warning 84	Warning 84
Warning 85	Warning 85
Warning 86	Warning 86
Warning 87	Warning 87
Warning 88	Warning 88
Warning 89	Warning 89
Warning 90	Warning 90
Warning 91	Warning 91
Warning 92	Warning 92
Warning 93	Warning 93
Warning 94	Warning 94
Warning 95	Warning 95
Warning 96	Warning 96
Warning 97	Warning 97
Warning 98	Warning 98
Warning 99	Warning 99
Warning 100	Warning 100

Only the input transitions completed in the input delay time and controlled in the graph are valid. Other triggered input transitions will put the device in locked condition.

The software displays a graphic rendering of the monitored area, and provides configuration and management tools, such as drop-down menus and function-specific worksheets.

- Administrative data:
 - File title header, application description and more
- Safety-relevant data:
 - Startup process information
- Safety Zone or Warning Zone configuration data:
 - Contours and limits

Select a Scanner

		SX5-ME70	SX5-M70	SX5-M10	SX5-R	SX5-B6
						
Presence Detection		50/70 mm	50/70 mm	50/70 mm	50/70 mm	50/70 mm
Hand Detection		30/40 mm	30/40 mm	30/40 mm	30/40 mm	30/40 mm
Body Detection		70/150 mm	70/150 mm	70/150 mm	70/150 mm	70/150 mm
Range (depending on resolution)		30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m	30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m	30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m	30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m	30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m
Max. Zone Sets (depending on configuration)		70	70	10	Depends on master	6
Master Remote		Master Add up to 3 Remotes	Master Add up to 3 Remotes	Master Add up to 3 Remotes	Remote	
Removable Memory		SXA-RM-70	SXA-RM-70	SXA-RM-10		
Max. OSSD Outputs (depending on configuration)		3 x 2 OSSD	3 x 2 OSSD	2 x 2 OSSD		1 x 2 OSSD
Connection		M12: 17-pin and M12: 8-pin	M12: 17-pin and M12: 8-pin	M12: 12-pin or M12: 8-pin		M12: 8-pin
Speed Monitoring		✓				
Muting		✓	✓	✓	✓	✓
Programmable Dust Filter		✓	✓	✓	✓	✓
Measurement Data		✓	✓	✓	✓	✓
Field-Replaceable Window		✓	✓	✓	✓	✓

Specifications



Operating Range and Scanning Angle

Safety protective field: up to 5.5 m
Warning field: 40 m
Scanning angle: 275 degrees

Detection Capability

30 mm, 40 mm, 50 mm, 70 mm, 150 mm

OSSD (Safety Output)

All inputs and outputs are protected from short circuits to +24 V dc or dc common

Environmental Rating

IEC IP65

Operating Conditions

-10 to +50 °C (+14 to +122 °F)

Current Consumption (24 V dc)

Standalone Scanner: No output load (I0) at 24 V DC: 0.3 A
Remote Scanner: No output load (I0) at 24 V DC: 0.3 A plus 0.3 A
Master Scanner: With maximum output load at 24 V DC: I0 plus 0.5 A per OSSD pair used (or warning pair outputs)

Mechanical Data

Housing material: Aluminum Alloy
Housing color: YellowRAL1003
Optics cover material: PC
Optics cover surface: Acrylic

Safety Data

Type 3 (EN 61496-1)
SIL 2 (IEC 61508)
Category 3 (EN ISO 13849-1)
SILCL 2 (EN 62061)
PL d (EN ISO 13849-1)

Optical Data

Wavelength: 905 nm
Pulse duration: 3 nsec
Laser class: CLASS 1 (EN 60825-1)

Certifications



Interface Options



SC26-2
SC26-2d
SC26-2e
SC26-2de

Flexible, efficient safety controller has small footprint and programs easily using icon-based software



SC10-2roe

Safety Controller and ISD to PLC Gateway connects up to 64 ISD devices and has 6 available safe inputs for other devices



SR-IM-9A

Interface Modules provide isolated safety output contacts for a primary safety device (for example, a safety light screen or safety module) with solid-state or hard contact outputs and external device monitoring (EDM) capability



SR-IM-11A

Accessories



SXA-MBK-1
Pitch and roll angle adjustment bracket



SXA-MBK-2
Protection bracket



SXA-RM-10 / SXA-RM-70
• Removable Memory SX..M10
• Removable Memory SX..M*70



SXA-WIN
Window Replacement Kit



8-Pin M12 Straight

SXA-815D
4.5 m (15')
SXA-825D
7.6 m (25')
SXA-850D
15.2 m (50')
SXA-8100D
30.4 m (100')



12-Pin M12 Straight

SXA-1215D
4.5 m (15')
SXA-1225D
7.6 m (25')
SXA-1250D
15.2 m (50')
SXA-12100D
30.4 m (100')



17-Pin M12 Straight

SXA-1715D
4.5 m (15')
SXA-1725D
7.6 m (25')
SXA-1750D
15.2 m (50')
SXA-17100D
30.4 m (100')

8-Pin Threaded M12 – Male to Male

SXA-DEE2M-810F
3 m (9.8')
SXA-DEE2M-815F
5 m (16.4')
SXA-DEE2M-830F
10 m (32.8')
SXA-DEE2M-850F
15 m (49.2')
SXA-DEE2M-880F
25 m (82')

4-Pin M12 D-Code to RJ45

STP-M12D-406
1.83 m (6')
STP-M12D-415
4.5 m (15')
STP-M12D-430
9.14 m (30')



Who is Banner?

Every 3.5 seconds, a Banner sensor is installed somewhere in the world. Banner solves problems for most of the manufacturing companies in the Fortune 500, as well as the startups changing industry with leading-edge production.

Banner technology supports manufacturing of the cars you drive, the food you eat, the medicine you take, and virtually every product in your daily life. Whatever the industry, Banner offers solutions to automate production, improve efficiency, and manufacture to the highest standard of quality.

Manufacturing Specialists

With over 30,000 products, Banner is a leading source for your manufacturing needs. We offer award-winning sensors, wireless solutions, vision sensors and lighting, machine safety, indicator lights, and LED lighting.

Application Solution Experts

Our field sales engineers are the most highly trained and experienced professionals in the industry. They can rapidly analyze an application to help you find the best solution.

Global Presence

Banner offers worldwide sales and support through a network of more than 3,000 professionals ready to help you no matter where you are located.

Unique Solutions

Banner's growing product line includes thousands of standard products. However, if you have an application requiring a unique solution or direct integration of a Banner product, contact one of Banner's Application Engineers to learn about our rapid customization and ability to deliver special product variations.

Talk with an app engineer.

Get product specs.

Order now.